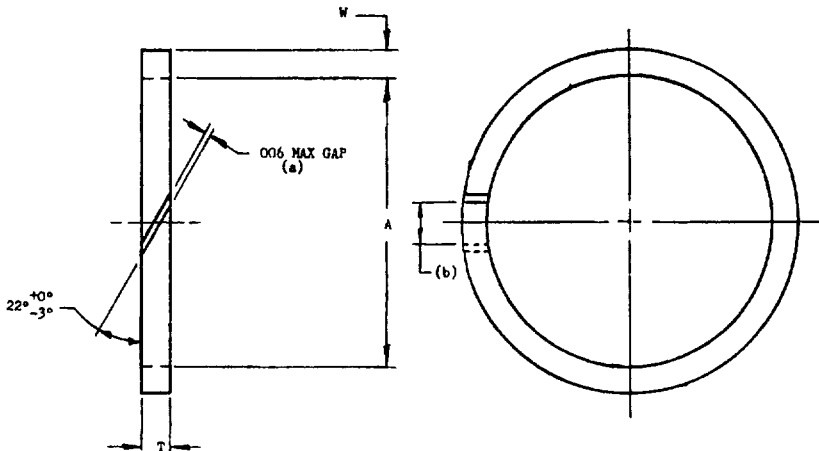


FED SUP CLASS
5330

DASH NO	LCM USC GD	A BASIC	W ± .001	T ± .001	APPROX WEIGHT LB / 100
-02	1/8	245	.112	.056	.056
-03	3/16	309	.112	.056	.056
-04	1/4	363	.117	.061	.085
-05	5/16	423	.117	.061	.096
-06	3/8	478	.121	.061	.110
-08	1/2	555	.125	.061	.149
-10	5/8	769	.131	.073	2.6
-12	3/4	941	.169	.073	3.2
-16	1	1 291	.169	.073	4.9
-20	1-1/4	1 503	.169	.073	5.15
-24	1-1/2	1 752	.169	.073	5.92
-28	1-3/4	2 127	.169	.073	7.07
-32	2	2 377	.169	.073	7.84

MATERIAL - SEE PROCUREMENT SPECIFICATION

SURFACES MUST BE SMOOTH AND FREE FROM IRREGULARITIES EDGES MUST BE CLEAN AND SHARP

DIMENSIONS IN INCHES

DASH NUMBERS CORRESPOND TO THE EQUIVALENT DASH NUMBERS OF THE MS28778 PREFORMED PACKINGS AND THE AN6289 NUT
EXAMPLE MS28773-04 RETAINER TO BE USED WITH THE MS28778-4 PACKING AND AN6289-4 NUT

(a) THIS DIMENSION TO BE MET WITH RETAINER MOUNTED ON A MANDREL OF "A" DIAMETER

(b) ENDS TO BE PARALLEL TO CENTERLINE WITHIN .5°

FOR DESIGN FEATURE PURPOSES, THIS STANDARD TAKES PRECEDENCE OVER PROCUREMENT DOCUMENTS REFERENCED HEREIN
REFERENCED DOCUMENTS SHALL BE "P" THE ISSUE IN EFFECT ON DATE OF INVITATIONS FOR BID

P A	USAF-11	TITLE	MILITARY STANDARD
Other Cust	NAVY - AS	RETAINER, PACKING BACKUP, TETRAFLUOROETHYLENE, STRAIGHT THREAD TUBE FITTING BOSS	MS28773(ASG)
PROCUREMENT SPECIFICATION	MIL-P-8791	SUPERSEDES	SHEET OF
		MS9058(ASG) FOR HYDRAULIC AND PNEUMATIC SYSTEMS APPLICATIONS	1 1

DD FORM 672-1 (Limited coordination)
ASG use only

PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE

APPROVED 1 NOVEMBER 66 REVISED

This military standard is approved by the Department of the Air Force and the Bureau of Naval Weapons and is mandatory for use by these activities. All other military activities are required to employ this standard where suitable.

Review activities:
USAF - 11
NAVY - AS