


FED. SUP CLASS
5330

USED SYMBOLS:
ARMY - AV, ME, MI
NAVY - NC, SN
USAF -

REVIEWER SYMBOLS:
ARMY - AS, NI
NAVY -
USAF -

"Review/revise information is current as of the date of this document. For future coordination of changes to this document, draft circulation should be based on the information in the current DD193."

This military standard is mandatory for use by all Departments & Agencies of the Department of Defense. Selection for all new engineering and design applications and for repetitive use shall be made from this document.

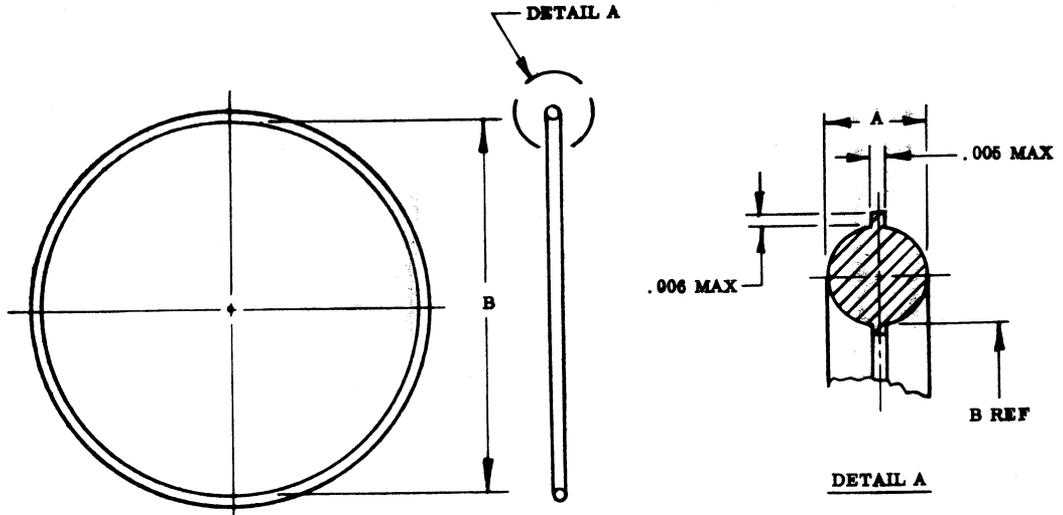

DASH NO.	A ±.003 DIA	B +.010 -.015 DIA
	-8	.031
-10	.406	
-12	.531	
-14	.641	
-16	.781	
-18	.906	
-20	.984	
-22	1.109	
-24	1.234	
-28	1.453	
-32	.047	1.672
-36		1.891
-38	.103	.362
-40		.424
-42		.487
-44		.549
-46		.612
-48		.674

(A)

NOTES:

1. MATERIAL: SYNTHETIC RUBBER IN ACCORDANCE WITH AMS3209.
2. DIMENSIONS IN INCHES. DIMENSIONING IN ACCORDANCE WITH USAS Y14.5-1966.
3. PACKING TO BE LUBRICATED WITH MIL-S-8660 SILICONE COMPOUND, PRIOR TO INSTALLATION.
4. THIS PACKING IS FOR USE WITH ENVIRONMENT RESISTANT CLASSES OF ELECTRIC CONNECTORS, SUCH AS CLASSES R AND F OF MS3106 AND MS3108. IT IS NOT INTENDED FOR USE IN FLUID SYSTEMS.

FOR DESIGN FEATURE PURPOSES, THIS STANDARD TAKES PRECEDENCE OVER PROCUREMENT DOCUMENTS REFERENCED HEREIN. REFERENCED DOCUMENTS SHALL BE OF THE ISSUE IN EFFECT ON DATE OF INVITATIONS FOR BID.

(A) DENOTES CHANGES

P.A. NAVY - AS	TITLE	MILITARY STANDARD
Other Cust ARMY - EL USAF - 11	PACKING, PREFORMED, FOR ELECTRICAL USE	MS28900
PROCUREMENT SPECIFICATION NONE	SUPERSEDES:	SHEET 1 OF 1