

INCH-POUND


MS28924C
w/AMENDMENT 1
26 July 2012
SUPERSEDING
MS28924C
19 April 2007

DETAIL SPECIFICATION SHEET

HOSE ASSEMBLY, RUBBER, HYDRAULIC 3,000 PSI,
ELBOW 90° TO ELBOW 90°, FLARED TUBE

This specification is approved for use by all Departments and Agencies of the Department of Defense.

The requirements for acquiring the product described herein shall consist of this specification sheet and MIL-DTL-8790.

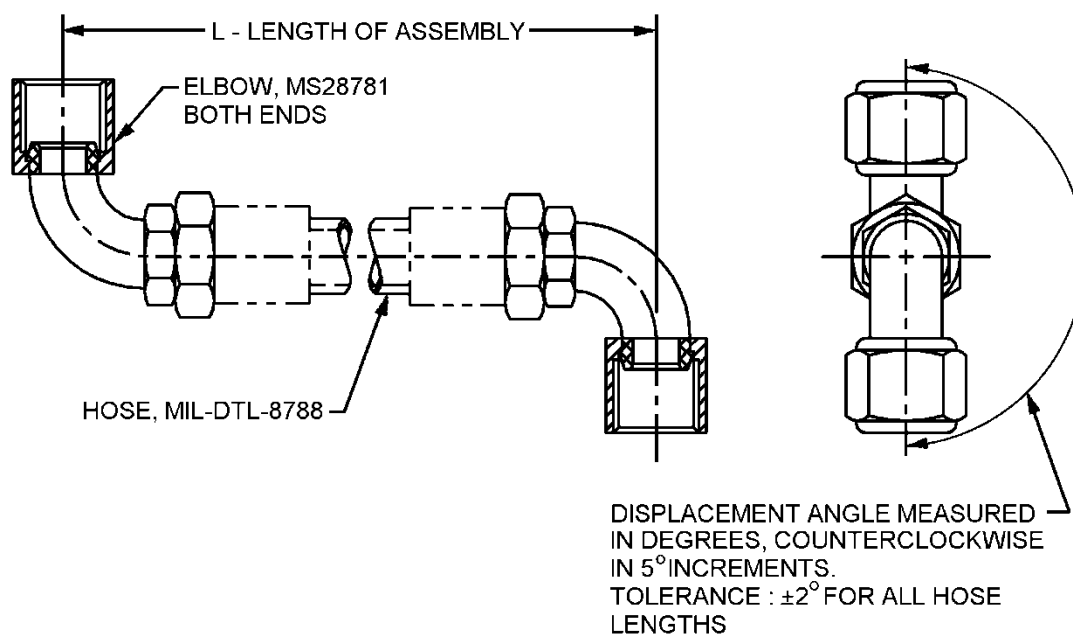

Dash size number (see note 4)	Tubing OD ref. inch (mm)	Hose ID ref. inch (mm)	End fittings PIN
-4	.25 (6.35)	.22 (5.59)	MS28781-4
-5	.31 (7.87)	.28 (7.11)	MS28781-5
-6	.38 (9.65)	.34 (8.64)	MS28781-6
8	.50 (12.70)	.44 (11.18)	MS28781-8
-10	.63 (16.00)	.56 (14.22)	MS28781-10
-12	.75 (19.05)	.69 (17.53)	MS28781-12
-16	1.00 (25.40)	.88 (22.35)	MS28781-16

FIGURE 1. Hose assembly, flared tube dimensions and configuration.

MS28924C
w/AMENDMENT 1

NOTES:

1. Dimensions are in inches.
2. Metric equivalents are for information only.
3. Hose assembly lengths (L) shall be as specified with the following tolerances:
 - a. Under 18 inches (0.46 m) long ($\pm .13$ inch (3.3 mm)).
 - b. Over 18 to 36 inches (0.46 to 0.91 m) long ($\pm .25$ inch (6.4 mm)).
 - c. Over 36 to 50 inches long (0.91 to 1.27 m) ($\pm .50$ inch (12.7 mm)).
 - d. Over 50 inches long ($\pm 1\%$).
4. Dash size number refers to the nominal outside diameter of the passageway in sixteenths (1/16) of an inch. A dash 8 (-8) has an outside diameter of one-half inch (8/16).


FIGURE 1. Hose assembly, flared tube dimensions and configuration - Continued.

REQUIREMENTS:

Hose assemblies shall be as specified on figure 1.

The hose assembly identification shall be marked in accordance with MIL-DTL-8790.

Part or Identifying Number (PIN) example:

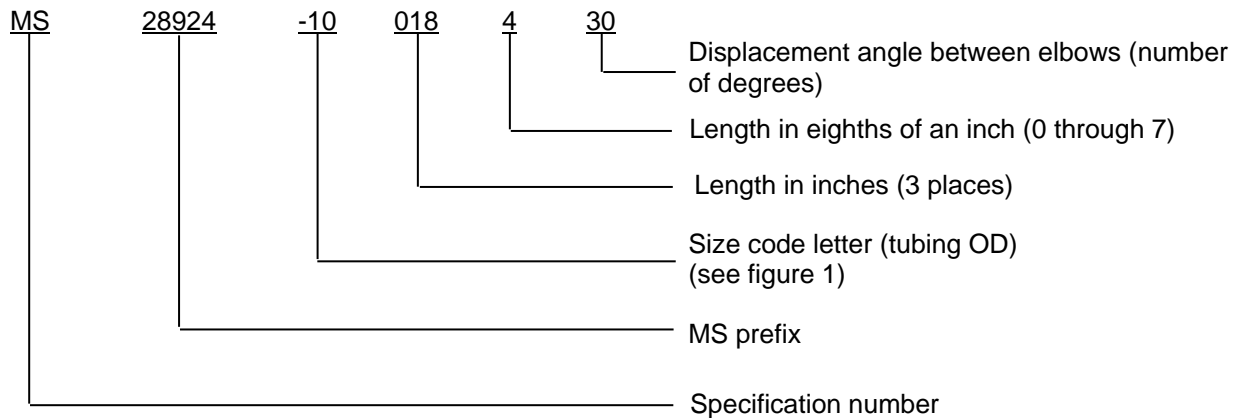

Example of a PIN: MS28924-10018430, MS28924 hose assembly, .625 inch (5/8 inch) passageway diameter, 18.5 inches long, $30^\circ \pm 2^\circ$ angular displacement.

MS28924C
w/AMENDMENT 1

For supersession data, see table I.

TABLE I. Supersession table.

Superseded PIN	Cancelled PIN
MS28924-4-XXXX	MS28924EXXXX
MS28924-5-XXXX	MS28924FXXXX
MS28924-6-XXXX	MS28924GXXXX
MS28924-8-XXXX	MS28924HXXXX
MS28924-10-XXXX	MS28924JXXXX
MS28924-12-XXXX	MS28924KXXXX
MS28924-16-XXXX	MS28924MXXXX

Amendment notations. The margins of this specification are marked with vertical lines to indicate modifications generated by this amendment. This was done as a convenience only and the Government assumes no liability whatsoever for any inaccuracies in these notations. Bidders and contractors are cautioned to evaluate the requirements of this document based on the entire content irrespective of the marginal notations.

Referenced documents. In addition to MIL-DTL-8790, this document references the following:

MS28781
MIL-DTL-8788

CONCLUDING MATERIAL

Custodians:

Army - AT
Navy - AS
Air Force - 99
DLA - CC

Preparing activity:
DLA - CC

(Project 4720-2012-015)

Review activities:

Army - AV, MI
Navy - SA
Air Force - 71

NOTE: The activities listed above were interested in this document as of the date of this document. Since organizations and responsibilities can change, you should verify the currency of the information above using the ASSIST Online database at <https://assist.dla.mil>.