


FED. SUP CLASS
5935

User activities: Army - AV
Navy
Air Force

Reviewer activities: Army MU, MI, EL
Navy EC, SH
Air Force 11, 17

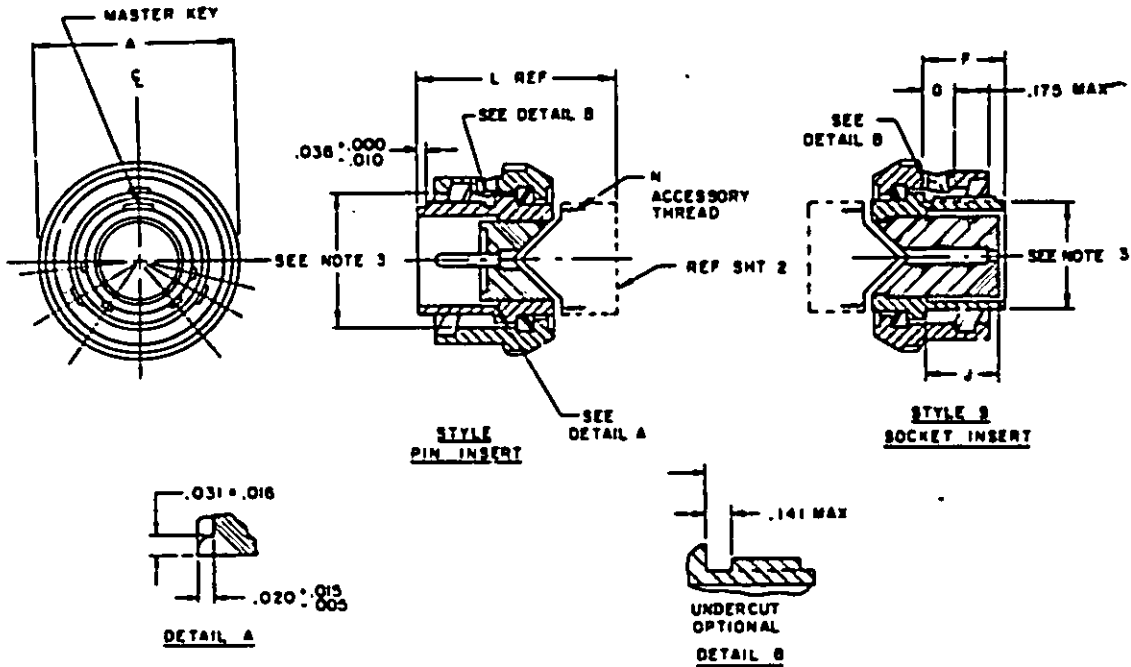

Classes E, F, J and P plugs

Size	A Max dia overall	F ± .010 Shldr location	G ± .020 Bay lock location	J + .020 - .000 Socket insert location	N Class 2A accessory thread UNEF
8	.782				.438-28
10	.926				.562-24
12	1.043				.6875-24
14	1.183	.353	.113	.337	.8125-20
16	1.305				.9375-20
18	1.391				1.0625-18
20	1.531				1.1875-18
22	1.656	.415		.399	1.3125-18
24	1.777		.152		1.4375-18

ⓐ FOR CHANGES SEE SHEET 2

This military standard is approved for use by all Departments and Agencies of the Department of Defense. Selection for all new engineering and design applications and for repetitive use is required for this document.

P.A Navy - AS	International Military	TITLE CONNECTORS, PLUG, ELECTRIC, SERIES 1, SOLDER TYPE, STRAIGHT, BAYONET COUPLING	MILITARY STANDARD
Other C... Army - EL AF - 85			MS 3116
Procurement Specification MIL-C-26482		SUPERSEDES:	SHEET 1 OF 2

DD FORM 1 SEP 63 672 (Coordinated) PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE

5935-2070-3

APPROVED 14 May 59 REVISED ⓐ 24 Aug 62 ⓑ 15 Feb 67 ⓒ 5 SEPT 1975 ⓓ 19 Aug 76

