


This military standard has been approved by the Department of Defense and is mandatory for use by all Departments and Agencies of the Department of Defense. Selection for all new engineering and design applications and for repetitive use shall be made from this document.

Review activities:
Navy - AS
USAF - 11
Army - EL

User activities:
Army - AV
Navy - 11
USAF - 11

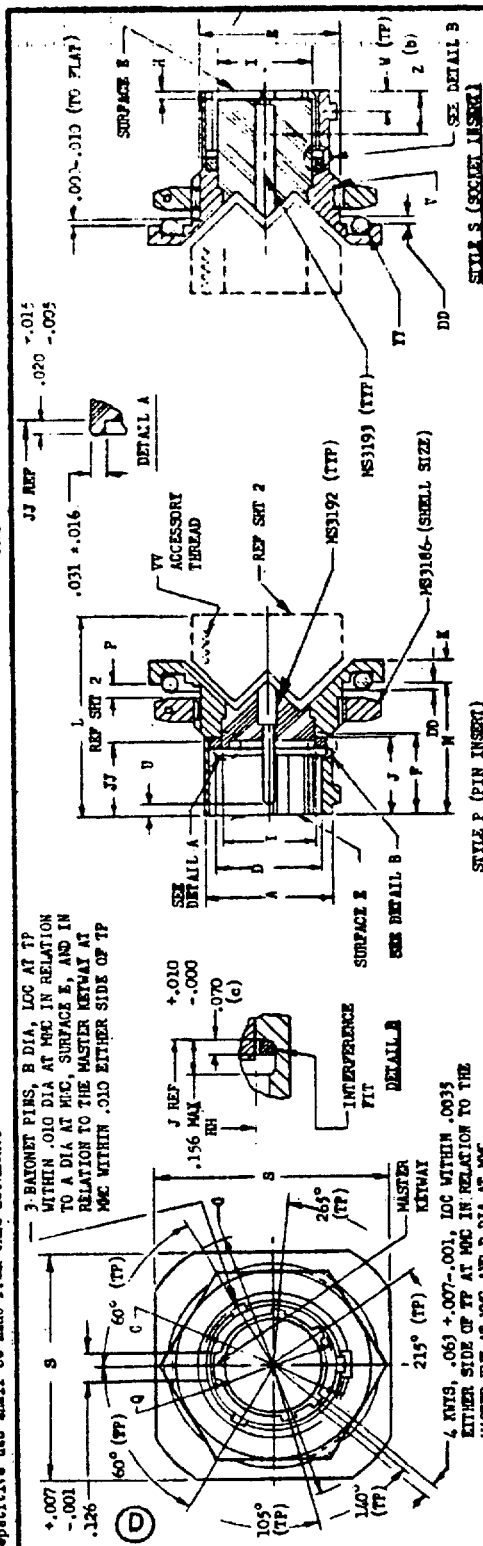

CLASS B, P, P, RECEPTACLES									
SIZE	A	B	C	D	E	F	G	H	I
8	.473	.563	.362	.330	.1078	.1078	.1078	.1078	.1078
10	.590	.680	.490	.455	.1203	.1203	.1203	.1203	.1203
12	.790	.899	.697	.618	.1391	.1391	.1391	.1391	.1391
14	.875	.984	.772	.692	.1516	.1516	.1516	.1516	.1516
16	1.000	1.108	.897	1.066	.1641	.1641	.1641	.1641	.1641
18	1.125	1.233	.968	1.191	.1766	.1766	.1766	.1766	.1766
20	1.250	1.358	1.087	1.316	.1894	.1894	.1894	.1894	.1894
22	1.375	1.483	1.212	1.441	.2078	.2078	.2078	.2078	.2078
24	1.500	1.610	1.337	1.566	.2203	.2203	.2203	.2203	.2203

CLASS B, P, P, RECEPTACLES									
SIZE	A	B	C	D	E	F	G	H	I
8	.473	.563	.362	.330	.1078	.1078	.1078	.1078	.1078
10	.590	.680	.490	.455	.1203	.1203	.1203	.1203	.1203
12	.790	.899	.697	.618	.1391	.1391	.1391	.1391	.1391
14	.875	.984	.772	.692	.1516	.1516	.1516	.1516	.1516
16	1.000	1.108	.897	1.066	.1641	.1641	.1641	.1641	.1641
18	1.125	1.233	.968	1.191	.1766	.1766	.1766	.1766	.1766
20	1.250	1.358	1.087	1.316	.1894	.1894	.1894	.1894	.1894
22	1.375	1.483	1.212	1.441	.2078	.2078	.2078	.2078	.2078
24	1.500	1.610	1.337	1.566	.2203	.2203	.2203	.2203	.2203

INACTIVE FOR NEW DESIGN AFTER 5 SEP 1975

P.A. Navy - AS
Other Cont
USAF - 11
Army - EL

TITLE

CONNECTORS, RECEPTACLE ELECTRIC, CRIMP-TYPE,
REAR MOUNTING JAM NUT, BAYONET COUPLING

PROCUREMENT SPECIFICATION
MIL-C-26482

SUPERSEDES

MILITARY STANDARD

MS3124

SHEET 1 OF 2

DD FORM 672-1 (Coordinate)

PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE.

5935-1947-12

APPROVED 5 Oct 61 REVISED A 18 Jul 62 B 24 Aug 62 C 15 Feb 67 D 5 SEP 1975

FOR DESIGN FEATURE PURPOSES THIS STANDARD TAKES PRECEDENCE OVER PRECEDENCE DOCUMENTS REFERENCED HEREIN.
REFERENCED DOCUMENTS SHALL BE OF THE ISSUE IN EFFECT ON DATE OF INVITATIONS FOR BID.

(a) DIMENSIONS IN INCHES
(b) DISTANCE BETWEEN END OF SHELL AND THE POINT AT WHICH A GAGE PIN HAVING THE SAME BASIC
DIAMETER AS THE MATING CONTACT AND A SQUARE FACE FIRST ENJOINS SOCKET CONTACT SPRING

(c) PACKING MATERIAL SHALL MEET THE REQUIREMENTS OF MIL-STD-417
(d) TRUE POSITION (TP) TOLERANCES SPECIFIED ARE IN ACCORDANCE WITH MIL-STD-8

(e) MATERIAL: SHELL-ALUMINUM ALLOY; BAYONET PINS (B DIA) - STAINLESS STEEL, PASSIVATED
(f) EXAMPLE OF PART NUMBER: MS3124 12 - 3 P 1

(g) MATERIAL: SHELL-ALUMINUM ALLOY; BAYONET PINS (B DIA) - STAINLESS STEEL, PASSIVATED
(h) EXAMPLE OF PART NUMBER: MS3124 12 - 3 P 1

(i) MATERIAL: SHELL-ALUMINUM ALLOY; BAYONET PINS (B DIA) - STAINLESS STEEL, PASSIVATED
(j) EXAMPLE OF PART NUMBER: MS3124 12 - 3 P 1

(k) MATERIAL: SHELL-ALUMINUM ALLOY; BAYONET PINS (B DIA) - STAINLESS STEEL, PASSIVATED
(l) EXAMPLE OF PART NUMBER: MS3124 12 - 3 P 1

(m) MATERIAL: SHELL-ALUMINUM ALLOY; BAYONET PINS (B DIA) - STAINLESS STEEL, PASSIVATED
(n) EXAMPLE OF PART NUMBER: MS3124 12 - 3 P 1

(o) MATERIAL: SHELL-ALUMINUM ALLOY; BAYONET PINS (B DIA) - STAINLESS STEEL, PASSIVATED
(p) EXAMPLE OF PART NUMBER: MS3124 12 - 3 P 1

(q) MATERIAL: SHELL-ALUMINUM ALLOY; BAYONET PINS (B DIA) - STAINLESS STEEL, PASSIVATED
(r) EXAMPLE OF PART NUMBER: MS3124 12 - 3 P 1

(s) MATERIAL: SHELL-ALUMINUM ALLOY; BAYONET PINS (B DIA) - STAINLESS STEEL, PASSIVATED
(t) EXAMPLE OF PART NUMBER: MS3124 12 - 3 P 1

(u) MATERIAL: SHELL-ALUMINUM ALLOY; BAYONET PINS (B DIA) - STAINLESS STEEL, PASSIVATED
(v) EXAMPLE OF PART NUMBER: MS3124 12 - 3 P 1

(w) MATERIAL: SHELL-ALUMINUM ALLOY; BAYONET PINS (B DIA) - STAINLESS STEEL, PASSIVATED
(x) EXAMPLE OF PART NUMBER: MS3124 12 - 3 P 1

(y) MATERIAL: SHELL-ALUMINUM ALLOY; BAYONET PINS (B DIA) - STAINLESS STEEL, PASSIVATED
(z) EXAMPLE OF PART NUMBER: MS3124 12 - 3 P 1

