

INCH-POUND
MS3345C
<u>05 November 2013</u>
SUPERSEDING
MS3345B
29 December 1978

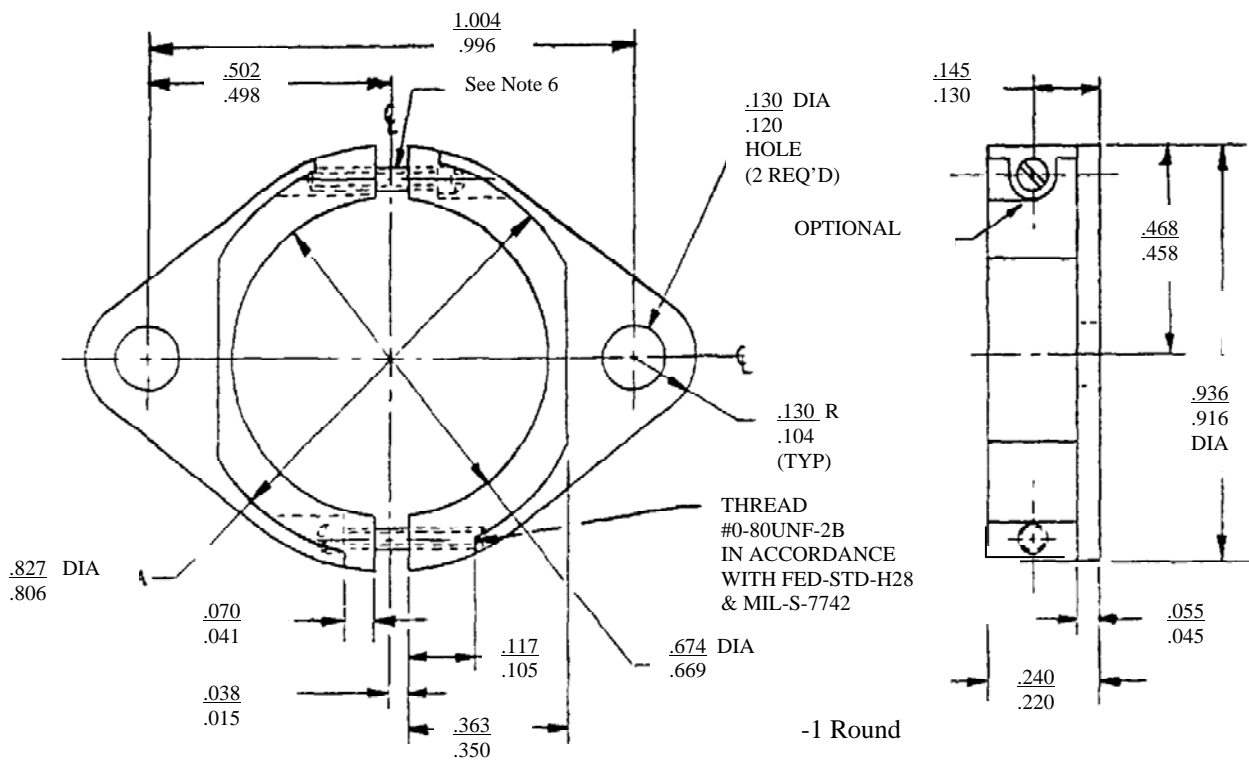
DETAIL SPECIFICATION SHEET

FLANGE, SPLIT MOUNTING METER, TIME TOTALIZING

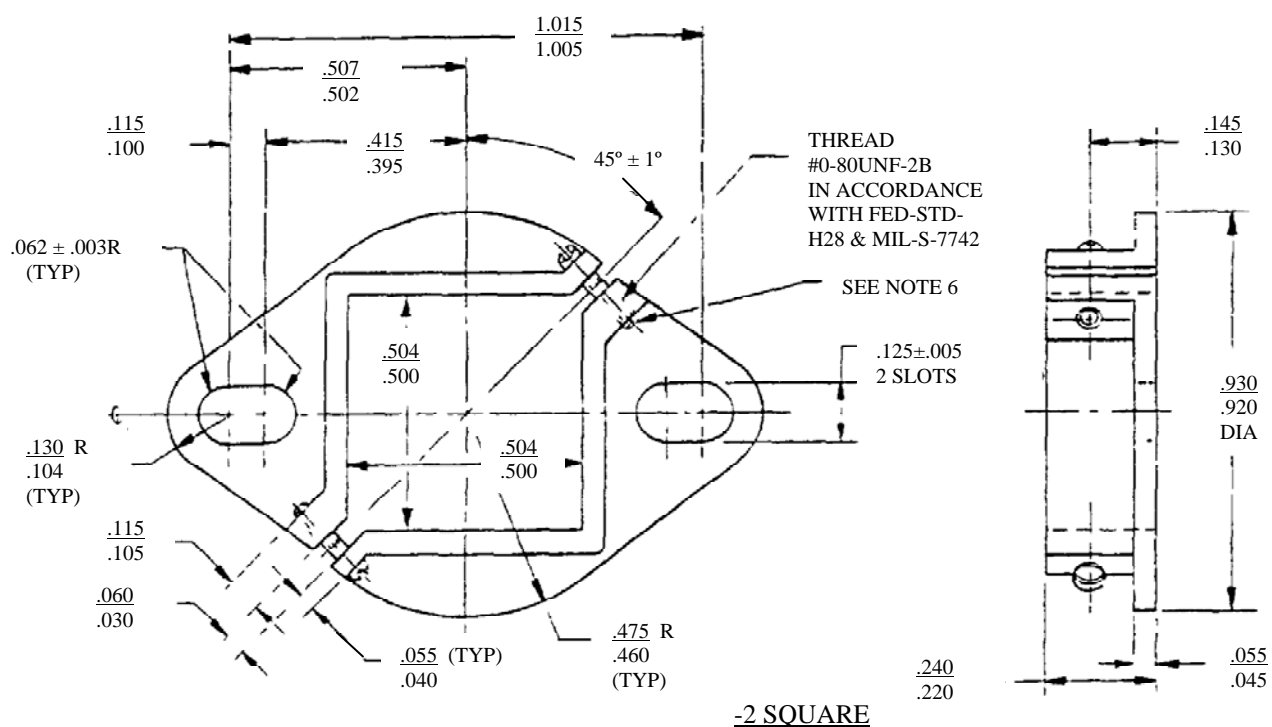
INACTIVE FOR NEW DESIGN AFTER 14 APRIL 1999

This specification is approved for use by all
Departments and Agencies of the Department of Defense.

The requirements for acquiring the product described herein shall consist of this specification sheet and MIL-DTL-7793.

FIGURE 1. Flange configuration.

MS3345C

FIGURE 1. Flange configuration - Continued.

NOTES:

1. Dimensions are in inches.
2. Use with MIL-DTL-7793/1 through MIL-DTL-7793/6 as applicable per slash sheet.
3. Material: Die casting per ASTM-B86 Alloy AG40A or equivalent.
4. Finish: The flange shall be finished in a durable, dull or semi-gloss black color.
5. Remove all burrs and sharp edges.
6. (0-80 UNF-2A) $\frac{1}{4}$ LG Fillister Head Machine Screw Stainless Steel.
7. Marking to be on package when ordered as a separate item.

MS3345C

Changes from previous issue. Marginal notations are not used in this revision to identify changes with respect to the previous issue due to the extent of the changes.

Referenced documents:

FED-STD-H28
ASTM-B86
MIL-S-7742
MIL-DTL-7793
MIL-DTL-7793/1
MIL-DTL-7793/2
MIL-DTL-7793/3
MIL-DTL-7793/4
MIL-DTL-7793/5
MIL-DTL-7793/6

Custodians:

Army – AR
Navy – AS
Air Force – 11

Preparing activity:

Navy - AS
(Project 6645-2012-019)

Review activities:

Army – AV, CR4, MI
Navy – OS
Air Force – 99
DLA – GS

NOTE: The activities listed above were interested in this document as of the date of this document. Since organizations and responsibilities can change, you should verify the currency of the information above using the ASSIST Online database at <https://assist.dla.mil>.