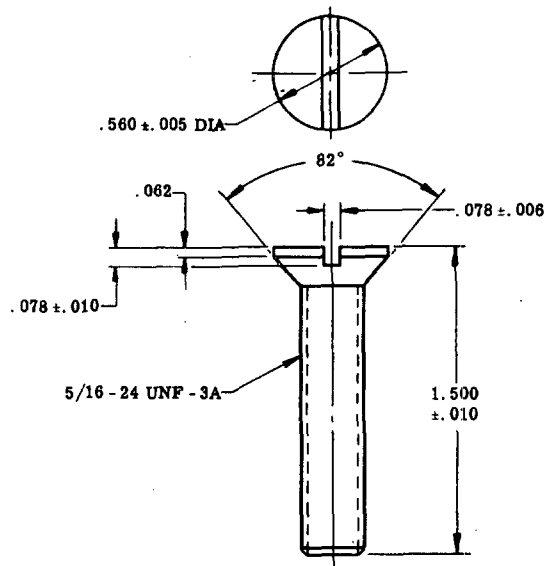


FED. SUP CLASS  
6615

## NOTES:

1. MATERIAL: CORROSION RESISTANT STEEL, CL 416, COND A, IN ACCORDANCE WITH QQ-S-763.
2. THREAD SHALL CONFORM TO HANDBOOK H28.
3. HEAT TREAT: HARDEN TO ROCKWELL C28 TO C38 (125,000 TO 150,000 PSI) IN ACCORDANCE WITH MIL-H-6875.
4. REMOVE ALL BURRS AND BREAK ALL SHARP EDGES.
5. DIMENSIONS IN INCHES. UNLESS OTHERWISE SPECIFIED, TOLERANCES: DECIMALS ± .015, ANGLES ±0° - 30°. DIMENSIONING AND TOLERANCING IN ACCORDANCE WITH USASI Y14.5 - 1986.

FOR DESIGN FEATURE PURPOSES, THIS STANDARD TAKES PRECEDENCE OVER PROCUREMENT DOCUMENTS REFERENCED HEREIN. REFERENCED DOCUMENTS SHALL BE OF THE ISSUE IN EFFECT ON DATE OF INVITATIONS FOR BID.

Project No. 6615-N016

P.A. NAVY - AS Other Cust	TITLE MOUNTING SCREW, SPECIAL	MILITARY STANDARD MS3361(AS)
PROCUREMENT SPECIFICATION: MIL-N-81604	SUPERSEDES:	SHEET 1 OF 1

This standard has been approved by the NAVAL AIR SYSTEMS COMMAND Department of the NAVY and is mandatory for use by that activity. All other military activities are required to employ this standard where suitable.

DD FORM 672-1 (Limited coordination)

PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE.

PLATE NO. 17209

☆ U. S. GOVERNMENT PRINTING OFFICE: 1969-341-516/A-4272

APPROVED 10 Jan 69 REVISED