


PUB. SUP CLASS  
6685

USER SYMBOLS:

REVIEWER SYMBOLS:

"Review/user information is current as of the date of this document. For future coordination of changes to this document, draft circulation should be based on the information in the current DUDISS."

This military standard is mandatory for use by all Departments & Agencies of the Department of Defense. Selection for all new engineering and design applications and for repetitive use shall be made from this document.

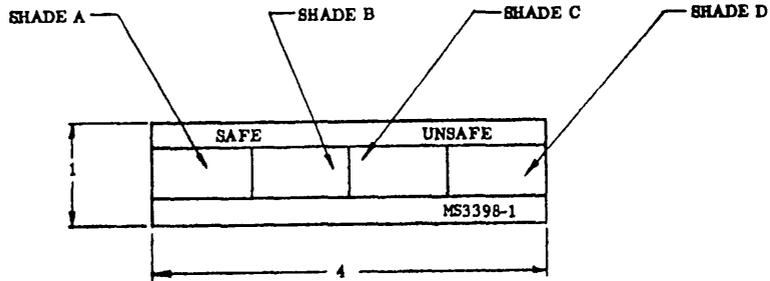

FRONT-WHITE COATED SIDE

HUMIDITY-INDICATING COLOR COMPARISON CHART  
INDICATOR PLUGS WHOSE COLOR HAS FADED BEYOND THE "SAFE" MARGIN HAVE LOST THEIR DEHYDRATING PROPERTY AND SHALL NOT BE USED.  
MFRS. NAME \_\_\_\_\_ MFRS. ADDRESS \_\_\_\_\_

REVERSE SIDE

DASH NO.  
-1

**NOTES:**

1. "SAFE" AND "UNSAFE" TO BE 14-PT. TYPE, ALL CAPS, ON FRONT SIDE. "SAFE" TO BE PRINTED IN SHADE A, "UNSAFE" IN RED.
2. SHADES A, B, C, AND D TO BE IN ACCORDANCE WITH THE COLORS SHOWN ON CHART MS16188.
3. MATERIAL TO BE 4-PLY ONE SIDE WHITE-COATED CARDBOARD, FULL-SIZE SHEET 22 BY 28, 500 SHEETS PER REAM, FULL REAM WEIGHING 210 POUNDS.
4. DIMENSIONS IN INCHES. UNLESS OTHERWISE SPECIFIED, TOLERANCES: FRACTIONS  $\pm 1/32$ .

APPROVED 15 Jul 69  
REVISED

P.A. NAVY - AS Other Cust AF - 82 ARMY - ME	TITLE	MILITARY STANDARD
	CARD-HUMIDITY-INDICATING COLOR COMPARISON	MS 3398
PROCUREMENT SPECIFICATION NONE	SUPERSEDES: AN7614	SHEET 1 OF 1