

INCH-POUND

MS3443B
 1 March 2007
 SUPERSEDING
 MS3443A
 05 September 1975


DETAIL SPECIFICATION SHEET

CONNECTORS, RECEPTACLE, ELECTRICAL, SOLDER OR WELDED FLANGE MOUNT,
 BAYONET COUPLING, SOLDER PIN CONTACT, CLASS H, SERIES 2

Inactive for new design after 15 December 1998.

This specification is approved for use by all Departments and
 Agencies of the Department of Defense.



The requirements for acquiring the product described herein
 shall consist of this specification sheet and MIL-DTL-26482.

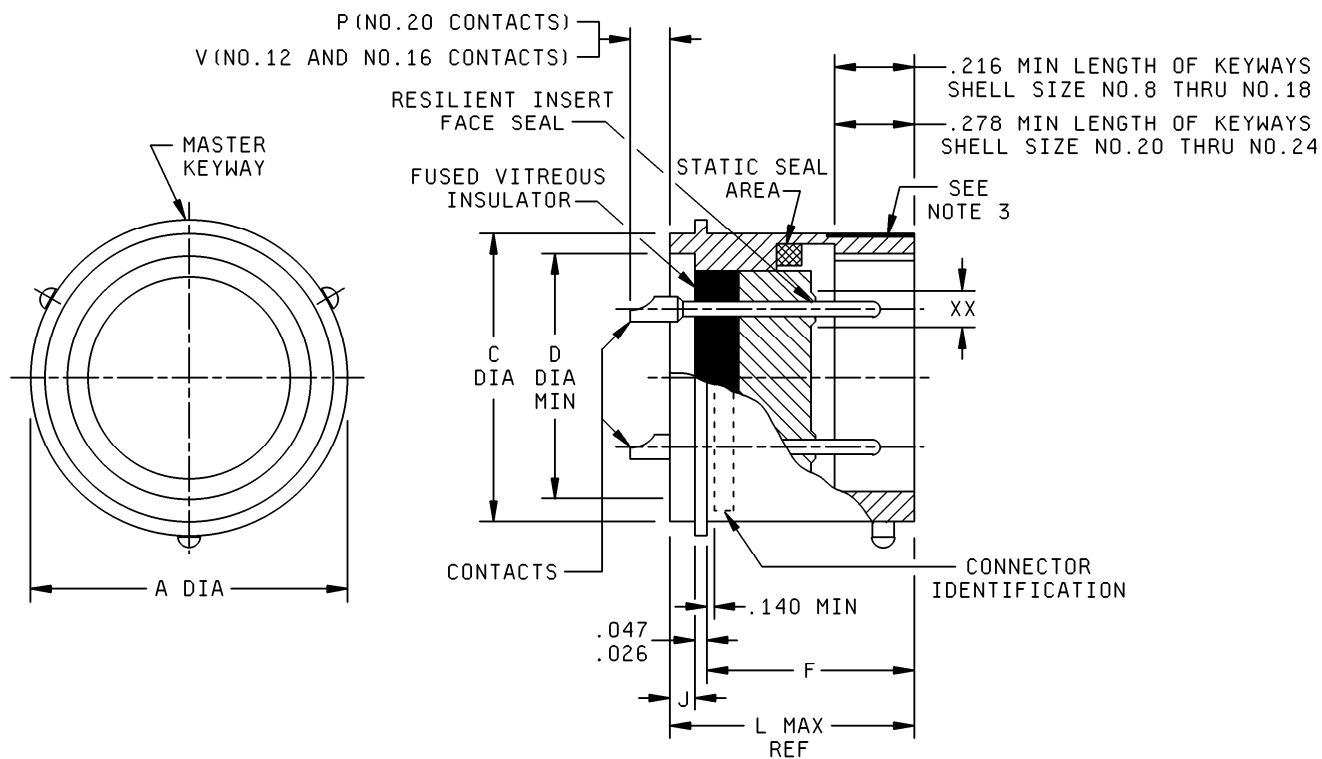

NOTE: For "XX", see note 4 and table I for contact cavities requiring reduced dimensions.

FIGURE 1. Receptacle, class H, dimensions and configurations.

MS3443B

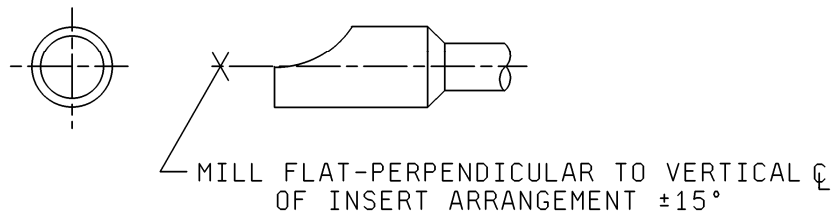
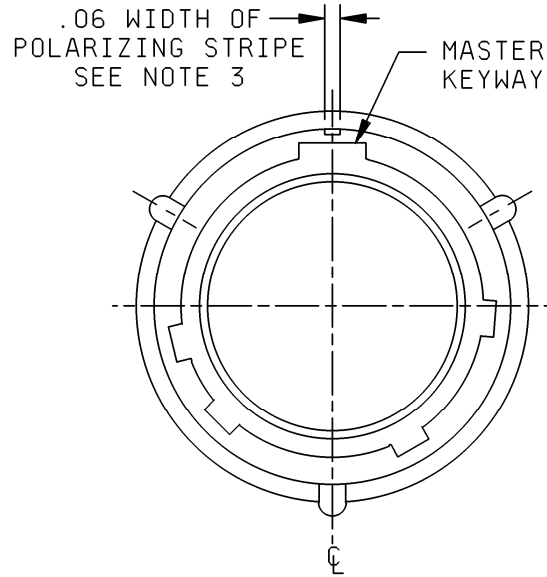


SOLDER POT ORIENTATION


FIGURE 1. Receptacle, class H, dimensions and configurations - Continued.

MS3443B

ENGAGING END APPROXIMATELY
SPHERICAL WITH
.011 MAX FLAT FOR SIZE NO.20
.020 ±.005 FLAT FOR SIZE NO.16
.057 ±.005 FLAT FOR SIZE NO.12

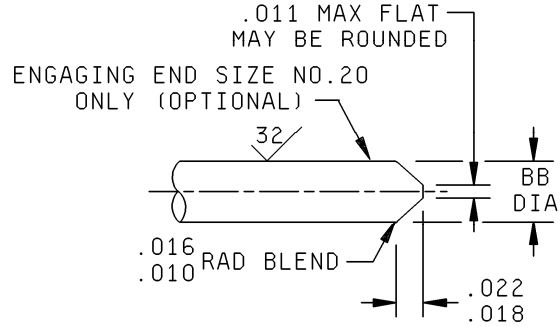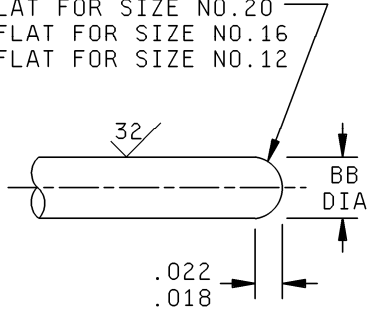


ENGAGING END OF CONTACT

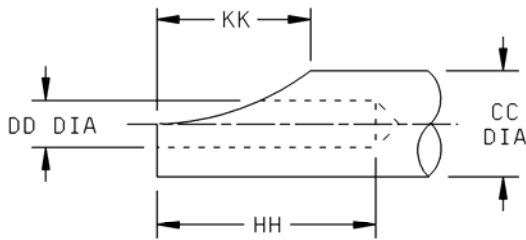

TERMINATION END OF CONTACTS

SOLDER POT

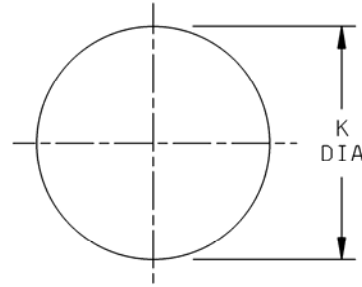

PANEL CUTOUT

Contact size	BB	CC	DD	HH	KK
20	.041 (1.04)	.088 (2.24)	.048 (1.22)	.188 (4.78)	.110 (2.79)
	.039 (0.99)	.061 (1.55)	.042 (1.07)	.109 (2.77)	.068 (1.73)
16	.0635 (1.61)	.116 (2.95)	.075 (1.91)	.251 (6.38)	.141 (3.58)
	.0615 (1.56)	.096 (2.44)	.069 (1.75)	.172 (4.37)	.109 (2.77)
12	.095 (2.41)	.150 (3.81)	.122 (3.10)	.251 (6.38)	.141 (3.58)
	.093 (2.36)	.130 (3.30)	.112 (2.84)	.172 (4.37)	.109 (2.77)

FIGURE 1. Receptacle, class H, dimensions and configurations - Continued.

MS3443B

Shell size	A	C	D	F
8	.635 (16.13) .615 (15.62)	.563 (14.30) .557 (14.15)	.403 (10.24)	.598 (15.19)
10	.760 (19.30) .740 (18.80)	.673 (17.09) .667 (16.94)	.515 (13.08)	
12	.854 (21.69) .834 (21.18)	.782 (19.86) .776 (19.71)	.630 (16.00)	
14	.979 (24.87) .959 (24.36)	.907 (23.04) .901 (22.89)	.755 (19.18)	
16	1.104 (28.04) 1.084 (27.53)	1.032 (26.21) 1.026 (26.06)	.880 (22.35)	
18	1.228 (31.19) 1.208 (30.68)	1.157 (29.39) 1.151 (29.24)	.980 (24.89)	
20	1.322 (33.58) 1.302 (33.07)	1.251 (31.78) 1.245 (31.62)	1.105 (28.07)	.660 (16.76)
22	1.448 (36.78) 1.428 (36.27)	1.376 (34.95) 1.370 (34.80)	1.230 (31.24)	
24	1.574 (39.98) 1.554 (39.47)	1.501 (38.13) 1.495 (37.97)	1.385 (35.18)	

Shell size	J	K	L	P	V	Max weight lbs (grams)
8	.156 (3.96) .116 (2.95)	.570 (14.48)	.801 (20.35)	.178 (4.52) .118 (3.00)	.248 (6.30) .188 (4.78)	.0310 (14.07)
10		.680 (17.27)				.0340 (15.43)
12		.789 (20.04)				.0400 (18.16)
14		.914 (23.22)				.0510 (23.15)
16		1.039 (26.39)				.0620 (28.15)
18		1.164 (29.57)				.0820 (37.23)
20		1.258 (31.95)				.863 (21.92)
22	.188 (4.78)	1.383 (35.13)	.895 (22.73)	.146 (3.71) .086 (2.18)	.216 (5.49) .156 (3.96)	.1150 (52.21)
24	.148 (3.76)	1.508 (38.30)				.2680 (121.67)

FIGURE 1. Receptacle, class H, dimensions and configurations - Continued.

MS3443B

Inches	mm
.005	0.13
.010	0.25
.011	0.28
.016	0.41
.020	0.51
.022	0.56
.026	0.66
.047	1.19
.057	1.45
.06	1.5
.088	2.23
.140	3.56
.216	5.49
.278	7.06

NOTES:

1. Dimensions are in inches. Metric equivalents are given for information only.
2. Dimensional tolerances are $.XX \pm .01$, $.XXX \pm .005$. Angular dimensions are $X^{\circ} \pm 1^{\circ}$.
3. Polarizing stripes, color optional.
4. Insert arrangements requiring reduced diameters for raised seal barrier on outer row of contact cavities as indicated.
5. True position (TP) tolerances specified are in accordance with ASME Y14.5M.

FIGURE 1. Receptacle, class H, dimensions and configurations - Continued.

MS3443B

TABLE I. Contact cavities requiring reduced diameters (XX) for pins and sockets in outer row of contact cavities. 1/

Shell size	Insert arrangement	Contact cavities
8	-33 & -98	A, B, C.
12	-10	C, G.
14	-12	A, B, C, D, E, F, G, H.
14	-18	A, C, E, G, J, L.
14	-19	B, D, F, H, K, M.
16	-26	A, B, C, D, E, F, G, H, J, K, L, M, N, P, R.
18	-32	A, B, C, D, E, F, G, H, J, K, L, M, N, P, R, S, T.
22	-41	A, B, C, D, E, F, G, H, J, K, L, M, N, P, R, S, T, U, V, W, X, Y.

1/ The reduced diameter "XX" refers to the diameters of the raised seal barriers (pin barrier rings) or lead-in chamfers (socket entry holes) to ensure proper sealing of pin and socket after mating. See MIL-DTL-26482, connector intermateability control dimensions (series 1 and series 2) figure for reduced diameter "XX" for contact size 20 only.

REQUIREMENTS:

Dimensions and configuration: See figure 1 and table I.

Connector mating: This connector mates with MS3475 and MS3476.

For insert arrangement: See MIL-STD-1669.

Intermateability dimensions are in accordance with MIL-DTL-26482.

Material:

Shell types A and B, 300 series stainless steel in accordance with ASTM A582/A582M and ASTM A276 (weld only, not intended for solder applications).


Shell type C, cold rolled steel in accordance with ASTM A108 (intended for solder applications only).

Finish:

Shell types A and B, passivated in accordance with ASTM A967.

Shell type C, .0001 inch (2.54 µm) tin minimum in accordance with ASTM B545 or ASTM B339 over nickel in accordance with SAE AMS-QQ-N-290.

MS3443B

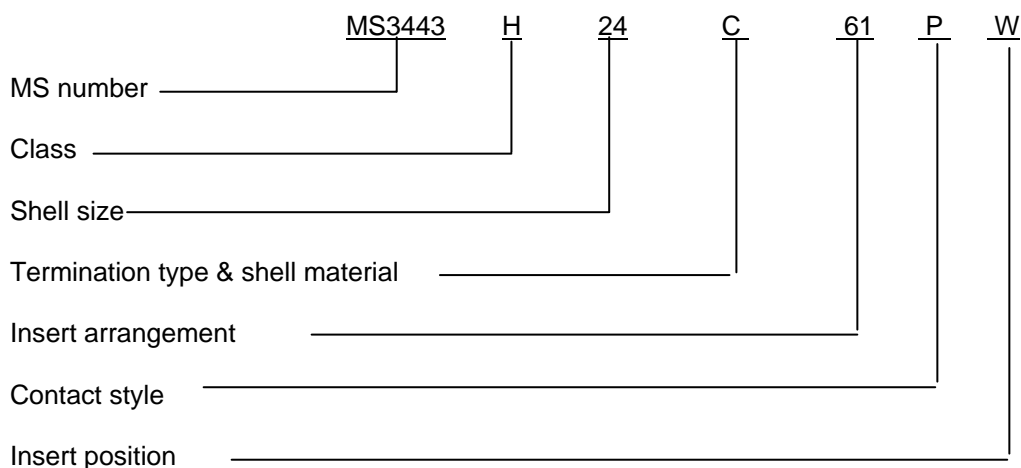

Supersession data: PIN MS3443H*C*** supersedes PINs MS3443H*A*** and MS3443H*B***.

Changes from previous issue. Marginal notations are not used in this revision to identify changes with respect to the previous issue due to the extent of the changes.

Referenced documents. In addition to MIL-DTL-26482, this document references the following:

MS3475
 MS3476
 MIL-STD-1669
 ASME Y14.5M
 ASTM A108
 ASTM A276
 ASTM A967
 ASTM A582/A582M
 ASTM B339
 ASTM B545
 SAE AMS-QQ-N-290

CONCLUDING MATERIAL

Custodians:
 Army - CR
 Navy - AS
 Air Force - 11
 DLA - CC

Preparing activity:
 DLA - CC
 (Project 5935-4656-010)

Review activities:
 Army - AV
 Navy - EC, SH

NOTE: The activities listed above were interested in this document as of the date of this document. Since organizations and responsibilities can change, you should verify the currency of the information above using the ASSIST Online database at <http://assist.daps.dla.mil>.