


NOTICE: When Government drawings, specifications, or other data are used for any purpose other than in connection with a definitely related Government procurement operation, the United States Government thereby incurs no responsibility, nor any obligation whatsoever; and the fact that the Government may have formulated, furnished, or in any way supplied the said drawings, specifications, or other data is not to be regarded by implication or otherwise as in any manner licensing the holder or any other person or corporation, or conveying any rights or permission to manufacture, use, or sell any patented invention that may in any way be related thereto.

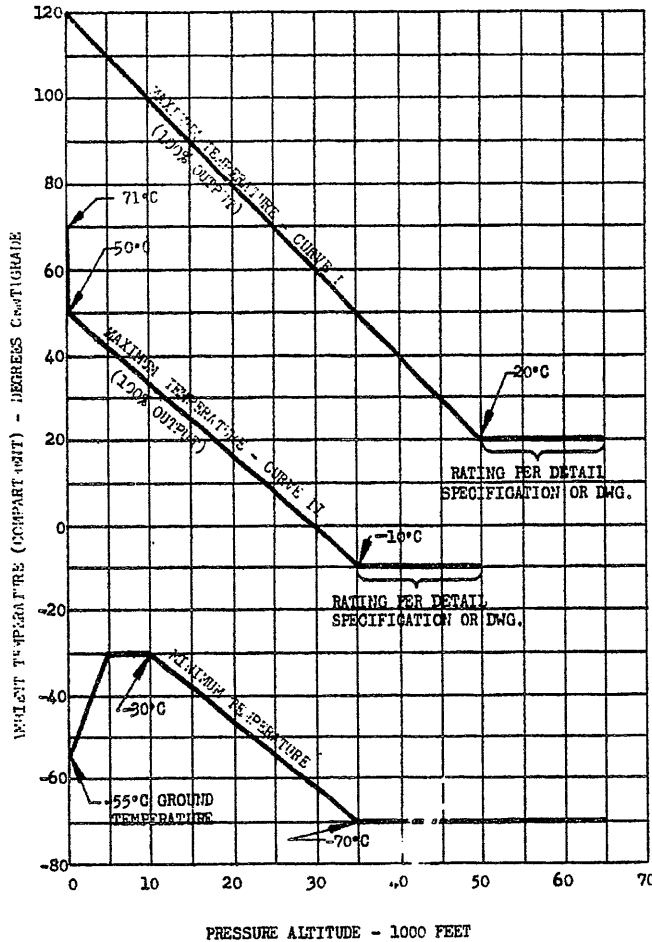

MINIMUM TEMPERATURE CURVE IS APPLICABLE TO ALL EQUIPMENT DESIGNED TO EITHER MAXIMUM TEMPERATURE CURVE I OR II.  
 MAXIMUM TEMPERATURE CURVE II IS APPLICABLE ONLY FOR INTERIM PROCUREMENT AND IF SPECIFICALLY PERMITTED BY THE  
 DETAIL SPECIFICATION OR DRAWING.

TEST CONDITIONS PER DETAIL SPECIFICATION.

CURVE I INDICATES THE MAXIMUM TEMPERATURES TO WHICH EQUIPMENT MUST BE DESIGNED TO OPERATE SATISFACTORILY IN  
 UNCONDITIONED COMPARTMENTS OF HIGH PERFORMANCE AIRCRAFT POWERED BY AIR COOLING ENGINES.

CURVE II INDICATES THE MAXIMUM TEMPERATURES TO WHICH EQUIPMENT MUST BE DESIGNED TO OPERATE SATISFACTORILY IN  
 CONDITIONED COMPARTMENTS OF HIGH PERFORMANCE AIRCRAFT OR IN LOW PERFORMANCE AIRCRAFT.

(A) DECLASSIFIED.

THIS IS A DESIGN STANDARD. NOT USED AS A PART NUMBER.

CUSTODIANS Navy - BuAer Air Force	OTHER INT. A - N - AF -	<b>MILITARY STANDARD</b>		<b>MS33543</b> (ASG)
		CRITERIA-TEMPERATURE AND ALTITUDE RANGE SELF COOLED ELECTRIC EQUIPMENT		
PROCUREMENT SPECIFICATION NOTE		SUPERSEDES:		SHEET 1 OF 1

APPROVED 13 Jul 63 REVISED (A) 27 Nov 53