

GENERAL INSTRUCTIONS

DESCRIPTION: HELICAL COIL INSERTS ARE SCREW
THREADED BUSHINGS COILED FROM DIAMOND-SHAPED
CROSS-SECTION WIRE. THEY ARE SCREWED INTO
ZAPPED HOLES TO FORM NOMINAL SIZE INTERNAL
THREADS. INSERTS ARE INSTALLED BY TORQUING
THROUGH A DIAMETRAL TANG WHICH IS NOTCHED
FOR TANG REMOVAL.

THREADS: ASSEMBLED INSERT, CLASSES 28 AND 30 ARE CONTROLLED BY TOLERANCE RANGE OF TAPPED HOLE INTO WHICH INSERT IS FITTED. THEREFORE, THE SAME INSERT IS USED FOR THREAD CLASSES 28 AND 30. THE GRIP COIL OR COILS OF THE SCREW LOCKING INSERT ARE SHAPED TO PROVIDE PREVAILING TORQUE.

TAPPED HOLE: 60° AMERICAN NATIONAL OR UNIFIED FORM; TAPS AND GAGES STANDARD WITH MANUFACTURER.

MINIMUM LENGTH OF INSERT: MINIMUM INSERT LENGTHS ARE EQUAL TO 1, 1-1/2 AND 2 TIMES THE MINIMUM MAJOR DIAMETER OF THE SCREW THREAD FOR FREE RUNNING INSERTS AND 1-1/2 TIMES THE MINIMUM MAJOR DIAMETER OF THE SCREW THREAD FOR SCREW LOCKING INSERTS. FOR AVAILABLE MINIMUM LENGTHS OF SPRING IN INSERTS, SEE STANDARD M21200 (INSERT, SCREW THREAD, COARSE AND FINE, SCREW, HELICAL COIL) AND M21200 (INSERT, SCREW THREAD, COARSE AND FINE, FREE RUNNING, HELICAL COIL).

LENGTH OF ASSEMBLED INSERT: THE MINIMUM LENGTH, L, OF ASSEMBLED INSERT IS EQUAL TO THE NOMINAL LENGTH MINUS 3/4 PITCH. MAXIMUM LENGTH OF ASSEMBLED INSERT IS EQUAL TO MINIMUM LENGTH, L, PLUS 1/4 PITCH.

DEPTH OF RECOMMENDED NINTHIN TAP DRILLED
BORE: FOR BLIND HOLES WITH A COUNTERSINK,
AS SPECIFIED IN THE TABULATION, THE
NINTHIN TAP DRILL DEPTH, F , EQUALS THE
MAXIMUM LENGTH OF ASSEMBLED INSERT PLUS
6 PITCHES WHEN STANDARD PLOG TAPS ARE
USED. FOR BLIND HOLES WITHOUT COUNTER-
SINK THE NINTHIN TAP DRILL DEPTH FOR
STANDARD PLOG TAPS IS EQUAL TO MAXIMUM
LENGTH OF ASSEMBLED INSERT PLUS 5
PITCHES. WHEN DESIGN WILL NOT PERMIT
THE ABOVE TAP DRILL DEPTH FOR STANDARD
PLOG TAPS, BOTTOMING TAPS MAY BE USED WHICH
WILL ALLOW THE TAP DRILL DEPTH TO BE DE-
CREASED UP TO 3 PITCHES. IF TAP DRILL DEPTH
IS INCREASED BY THE MAXIMUM OF 3 PITCHES,
NO TAP END CLEARANCE IS PROVIDED.

DEPTH OF FULL THREAD OF TAPPED HOLE: FOR THRU OR BLIND TAPPED HOLES WITH A COUNTER-SINK, AS SPECIFIED IN THE TAPINATION, THE MINIMUM FULL THREAD L (ALSO MINIMUM FLANGE THICKNESS FOR THRU HOLES), EQUALS MINIMUM ASSEMBLED LENGTH OF INSERT, L , AS SPECIFIED IN THE TAPINATION PLUS $1/4$ - $1/8$ PITCH. FOR THRU OR BLIND TAPPED HOLES WITHOUT COUNTER-SINK, THE MINIMUM FULL THREAD (ALSO MINIMUM FLANGE THICKNESS FOR THRU HOLES) SHALL NOT BE LESS THAN THE MINIMUM LENGTH OF INSERT, L , PLUS $1/4$ PITCH.

LIMITS OF SOIL PROJECTION (WITH COUNTER-SUBSIDIARY) FOR THE MAXIMUM LENGTH OF SOIL THREAD PROTRUSION, l , AS SPECIFIED IN THE TABULATION, IS 1.5 TIMES THE SPECIFIED PROTRUSION, l_0 , BASED ON THE MAXIMUM LENGTH OF FRESH SOIL (CLASS 1) INSERT PLUS $1/4$ INCH. WHEN TAP IS REMOVED, THE SPECIFIED VALUES FOR l MAY BE INCREASED TO EQUAL THE MAXIMUM DESIGN DEPTH OF THE TAP THILL HOLE, P . K DIMENSIONS ARE NOT APPLICABLE TO SCREW-LOCK DEVICES FOR THE SIZES LISTED BELOW. FOR THESE SIZES, TAP SHOULD BE REMOVED TO PERMIT ENGAGEMENT OF SCREW WITH GRIP COIL IN ACCORDANCE WITH REQUIREMENTS OF K .

1-1/2 DIAMETER LONG UNC 4-40 THRU 7/16-24
2 DIAMETER LONG UNC 4-40 THRU 1/4-20
1-1/2 DIAMETER LONG UNF 10-32 THRU 5/16-24
2 DIAMETER LONG UNF 10-32 AND SMALLER.

MINIMUM FULL THREAD PROJECTION: DIMENSION W IS MINIMUM DISTANCE THAT FIRST FULL THREAD OF BOLT MUST PROJECT BELOW WORK SURFACE TO INSURE A LOCKING EFFECT FOR SCREW-LOCKING INSERTS (LOCATED 1-1/2" P. MAX. BELOW SURFACE OF WORK).

LENGTH OF BOLT PROJECTION (WITHOUT COUNTER-SUNK HOLES): FOR TAPPED HOLES, WITHOUT COUNTERSINK AND HAVING INSERTS INSTALLED AT A MINIMUM OF 1/4" PITCH BELOW THE BOSS SURFACE, THE SPECIFIED VALUES FOR K SHOULD BE DECREASED 1/4" PITCH WHEN TAP IS NOT PROVIDED.

COUNTERSINK AND COUNTERBORE: THE VALUES GIVEN IN THE TABULATION FOR DEPTH OF HOLE, P; MINIMUM FULL THREAD, E; AND LENGTH OF BOLT PROJECTION, L, ARE MEASURED FROM THE SURFACE OF THE BOSS OR FLANGE AND ARE BASED ON THE COUNTERSINK ANGLE TO H DIAMETER SHOWN. IF A COUNTERBORE OR COUNTERSINK OTHER THAN THAT SHOWN IS REQUIRED, THE VALUES FOR P, H AND L MUST BE MODIFIED.

INSTALLATION OF INSERT (WITH COUNTERSUNK HOLE): THE TOP EDGE OF THE INSERT SHALL BE INSTALLED 3/4 PITCH TO 1-1/2 PITCHES BELOW TOP SURFACE OF TAPPED HOLE.

BLIND HOLE ASSEMBLY (WITHOUT REMOVAL OF TANG): TO OBTAIN DESIGN HOLE-INSERT THREAD ENGAGEMENT EQUIVALENT TO A NOMINAL INSERT LENGTH WITHOUT REMOVING THE INSERT TANG, AN INSERT 1/2 DIAMETER GREATER IN NOMINAL LENGTH SHALL BE USED.

PERMITTED MODIFICATIONS: VALUES FOR F, N, K, M, AND INSTALLATION DEPTH OF INSERT MAY BE MODIFIED TO SUIT REQUIREMENTS FOR PRODUCTION TOOLING, DESIGN, ETC.

INSTALLATION OF INSERT (WITHOUT COUNTER-SUNK HOLES): FOR ALUMINUM FLANGE THICKNESS (EQUAL TO NOMINAL INSERT LENGTH), THE TOP EDGE OF THE INSERT SHALL BE INSTALLED 1/4 PITCH TO 1/2 PITCH BELOW TOP SURFACE OF TAPPED HOLE.

This military standard is approved by the Department of Defense and is mandatory on all activities. Selection for all new engineering and design specifications and for repetitive use shall be made from this document.

DISCOUNT.—When Government drawings, quotations, or other data are used for any purpose other than in connection with a definitely related Government procurement transaction, the United States Government thereby incurs no obligation whatsoever and the fact that the Government may have furnished, furnished, or received such data in any way implied the said drawings, quotations, or other data is not to be regarded by implication or otherwise as in any manner binding the bidder or any other person on the Government in competition, or constituting any right or position to manufacture, use, or sell any patented invention that may in any way be related thereto.

Ⓐ CANCELED AFTER 11 JANUARY 1971. USE MS33537.

THIS IS A DESIGN STANDARD. NOT TO BE USED AS A PART NUMBER. (A) FOR CHANGES SEE SHEET 1.

P.A. USAF - AFSC	TITLE	MILITARY STANDARD
Other Case Army - CE Navy - Wap	DESERT, SCREW THREADS, HELICAL COIL, ASSEMBLY AND HOLE, DIMENSIONS FOR	MS33646
PROCUREMENT SPECIFICATION	SUPERSEDES:	SHEET 1 OF 5

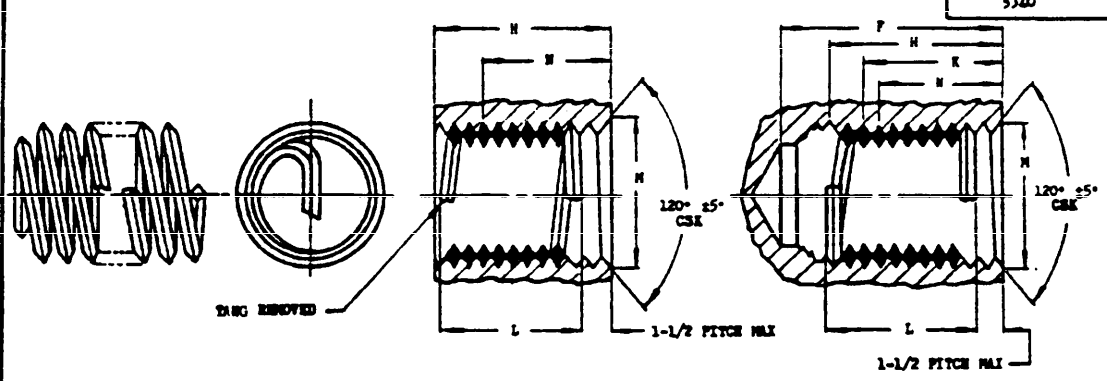
DD FORM 672-1 (Coordinated)

FORWARD ORDERING OF THIS JOURNAL ARE ENCOURAGED

APPROVED 17 JUL 61 REVISED (A) 11 JAN 71

NOTE:—When Government drawings, specifications, or other data are used for any purpose other than in connection with a definitely related Government procurement operation, the United States Government hereby assumes no responsibility, and the fact that the Government may have furnished, furnished, or is in any way supplying the said drawings, specifications, or other data is not to be regarded by implication or otherwise as in any way endorsing the product or any other product in competition, or conveying any right or permission to manufacture, use, or sell any patented invention that may in any way be related thereto.

This military standard is approved by the Department of Defense and is mandatory on all activities. Submission for all new engineering and design applications and for negative use shall be made from this document.

		FED. SUP CLASS 5340									
											
NOMINAL SIZE		.112	.138	.164	.190	.250	.3125				
THREADS PER INCH		60	32	32	24 (a)	32	20 (a)	28	18 (a)	24	
ASSEMBLED INSERT	PD, MAX, CLASS 2B	.0991	.1214	.1475	.1672	.1736	.2223	.2311	.2817	.2902	
	PD, MAX, CLASS 3B	.0982	.1204	.1465	.1661	.1726	.2211	.2300	.2803	.2890	
	PD, MIN, ALL CLASSES	.0958	.1177	.1437	.1629	.1697	.2175	.2268	.2764	.2854	
	MINOR DIA, MAX, CLASS 2B	.0939	.1160	.139	.156	.164	.207	.220	.265	.277	
	MINOR DIA, MAX, CLASS 3B	.0939	.1160	.1389	.1555	.1641	.2067	.2190	.2630	.2754	
	MINOR DIA, MIN, ALL CLASSES	.0849	.1060	.1300	.1450	.1560	.1960	.2110	.2520	.2670	
	L MIN LENGTH OF INSERT WHEN NOMINAL LENGTH = 1 DIA NOMINAL LENGTH = 1-1/2 DIA NOMINAL LENGTH = 2 DIA	.093 .149 .205	.115 .184 .253	.141 .223 .305	.159 .254 .349	.167 .262 .357	.212 .336 .462	.223 .348 .473	.271 .427 .583	.281 .438 .594	
TAPPED HOLE	F DEPTH OF BLIND HOLE, MIN WHEN NOMINAL LENGTH = 1 DIA NOMINAL LENGTH = 1-1/2 DIA NOMINAL LENGTH = 2 DIA	.250 .306 .362	.310 .379 .448	.336 .418 .500	.419 .514 .609	.362 .457 .552	.525 .650 .775	.446 .571 .696	.617 .773 .930	.541 .697 .854	
	H MIN FULL THREAD WHEN NOMINAL LENGTH = 1 DIA NOMINAL LENGTH = 1-1/2 DIA NOMINAL LENGTH = 2 DIA	.110 .190 .250	.170 .260 .310	.200 .280 .360	.230 .330 .420	.280 .380 .410	.300 .430 .550	.290 .410 .540	.370 .500 .680	.380 .510 .670	
	PD, MAX FOR CLASS 2B INSERTS CLASS 3B INSERTS	.1306 .1299	.1611 .1601	.1872 .1862	.2203 .2192	.2133 .2123	.2663 .2651	.2765 .2754	.3529 .3515	.3433 .3421	
	PD, MIN, ALL CLASSES	.1283	.1583	.1843	.2170	.2103	.2625	.2732	.3484	.3395	
	MINOR DIA, MAX, ALL CLASSES	.121	.150	.176	.205	.202	.267	.264	.334	.330	
	MINOR DIA, MIN, ALL CLASSES	.116	.144	.170	.199	.196	.261	.257	.328	.323	
	MINOR DIA, MIN, ALL CLASSES	.1404	.1733	.1993	.2370	.2253	.3062	.2904	.3751	.3595	
	K MAX LENGTH OF BOLT PROJECTION IF TAGS IS NOT REMOVED, WHEN INSERT NOMINAL LENGTH = 1 DIA NOMINAL LENGTH = 1-1/2 DIA NOMINAL LENGTH = 2 DIA	.100 .156 .212	.122 .191 .260	.149 .231 .313	.169 .264 .359	.175 .270 .365	.225 .351 .475	.232 .357 .482	.285 .411 .597	.291 .418 .604	
	M COUNTERBORE DIAMETER MAXIMUM MINIMUM	.180 .140	.210 .170	.240 .200	.280 .240	.260 .220	.340 .300	.330 .290	.410 .370	.400 .360	
	N MIN LENGTH OF BOLT FIRST FULL THREAD PROJECTION FOR THE SCREW LOCKING INSERT ASSEMBLY, WHEN INSERT NOMINAL LENGTH = 1-1/2 DIA NOMINAL LENGTH = 2 DIA	.16 .19	.19 .23	.21 .26	.26 .31	.23 .28	.33 .40	.29 .36	.40 .48	.38 .46	
(a) NOT RECOMMENDED FOR NEW DESIGN. SEE MIL-S-7742 FOR RECOMMENDED SERIES.											
THIS IS A DESIGN STANDARD. NOT TO BE USED AS A PART NUMBER.											
P.A. USAF - AFSC Other Code Army - CS Navy - Nop		TITLE INSERT, SCREW THREADS, HELICAL COIL, ASSEMBLY AND HOLE, DIMENSIONS FOR					MILITARY STANDARD MS33646				
PROCUREMENT SPECIFICATION		SUPERSEDES					SHEET 2				

DD FORM 672-1 (Coordinated)

PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE.

APPROVED 17 JUL 61 REVISED A FOR CHANGES SEE SHEET 1.

NOTICE—When Government drawings, specifications, or other data are used for any purpose other than in connection with a definitely related Government procurement operation, the United States Government thereby incurs no responsibility, nor any obligation whatsoever, and the fact that the Government furnished the data in any way implied the use of average specifications, or other data is not to be regarded by implication as an admission as to any Government liability in any other case, or in connection with any other operation, or in carrying out any rights or provisions in connection with this document.

This military standard is approved by the Department of Defense and is mandatory on all activities. Selection for all new engineering and design specifications and for revisions are shall be made from this document.

		FED. SUP CLASS 5360							
NOMINAL SIZE		.375		.4375		.500		.5625	
THREAD PER INCH		16 (a)	24	18 (a)	20	13 (a)	20	12 (a)	18
ASSUMED INSERT	PD, MAX, CLASS 2B	.3401	.3528	.3972	.4104	.4565	.4731	.5152	.5323
	PD, MAX, CLASS 3B	.3387	.3514	.3957	.4091	.4548	.4717	.5135	.5308
	PD, MIN, ALL CLASSES	.3344	.3479	.3911	.4050	.4500	.4675	.5084	.5264
	MINOR DIA, MAX, CLASS 2B	.321	.340	.376	.395	.434	.457	.490	.515
	MINOR DIA, MAX, CLASS 3B	.3182	.3372	.3717	.3916	.4234	.4537	.4843	.5106
	MINOR DIA, MIN, ALL CLASSES	.3070	.3300	.3600	.3830	.4170	.4460	.4720	.5020
	L MIN LENGTH OF INSERT WHEN NOMINAL LENGTH = 1 DIA	.328	.344	.384	.400	.442	.462	.500	.521
	NOMINAL LENGTH = 1-1/2 DIA	.516	.531	.603	.619	.692	.712	.781	.808
	NOMINAL LENGTH = 2 DIA	.753	.779	.821	.838	.942	.962	1.062	1.083
	TAPPED HOLE	F DEPTH OF BLIND HOLE, MIN WHEN NOMINAL LENGTH = 1 DIA	.719	.604	.830	.712	.924	.775	1.021
NOMINAL LENGTH = 1-1/2 DIA		.906	.791	1.049	.931	1.174	1.025	1.302	1.148
NOMINAL LENGTH = 2 DIA		1.093	.979	1.267	1.150	1.424	1.275	1.583	1.430
H MIN FULL THREAD WHEN NOMINAL LENGTH = 1 DIA		.440	.420	.510	.490	.580	.550	.650	.620
NOMINAL LENGTH = 1-1/2 DIA		.630	.600	.730	.710	.830	.800	.930	.900
NOMINAL LENGTH = 2 DIA		.810	.790	.950	.930	1.080	1.050	1.210	1.180
PD, MAX, FOR CLASS 2B INSERTS		.4201	.4059	.4890	.4744	.5554	.5371	.6225	.6035
CLASS 3B INSERTS		.4189	.4047	.4875	.4731	.5537	.5357	.6208	.6020
PD, MIN, ALL CLASSES		.4156	.4020	.4839	.4700	.5499	.5325	.6167	.5986
MINOR DIA, MAX, ALL CLASSES		.398	.392	.463	.458	.525	.522	.588	.586
MINOR DIA, MIN, ALL CLASSES	.390	.385	.453	.450	.515	.513	.578	.577	
MAJOR DIA, MIN, ALL CLASSES	.4454	.4220	.5179	.4937	.5865	.5562	.6562	.6251	
K MAX LENGTH OF BOLT PROJECTION IF TAP IS NOT REMOVED, WHEN INSERT	NOMINAL LENGTH = 1 DIA	.344	.354	.402	.413	.461	.475	.521	.535
	NOMINAL LENGTH = 1-1/2 DIA	.532	.541	.621	.632	.711	.725	.802	.816
	NOMINAL LENGTH = 2 DIA	.719	.729	.840	.851	.942	.975	1.083	1.097
N COUNTERSINK DIAMETER MAXIMUM MINIMUM		.480	.460	.560	.530	.620	.590	.690	.660
		.440	.420	.520	.490	.580	.550	.650	.620
H MIN LENGTH OF BOLT FIRST FULL THREAD PROJECTION FOR THE SCREW LOCKING INSERT ASSEMBLY, WHEN	NOMINAL LENGTH = 1-1/2 DIA	.46	.42	.54	.50	.60	.55	.67	.61
	NOMINAL LENGTH = 2 DIA	.56	.52	.65	.61	.73	.67	.81	.75
(a) NOT RECOMMENDED FOR NEW DESIGN, SEE MIL-8-7742 FOR RECOMMENDED SERIES.									
THIS IS A DESIGN STANDARD. NOT TO BE USED AS A PART NUMBER.									
P.A. USAF - AFSC Other Code Army - CE Navy - aop		TITLE INSERT, SCREW THREADS, HELICAL COIL, ASSEMBLY AND HOLE, DIMENSIONS FOR				MILITARY STANDARD MS33646			
PROCUREMENT SPECIFICATION		SUPERSEDES				SHEET 3			

DD FORM 672-1 (Coordinate)

PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE.

APPROVED 17 JUL 61 REVISED 1 FOR CHANGES SEE SHEET 1

NOTE: When Government drawings, specifications, or other data are used for any purpose other than in connection with a definitely related Government procurement operation, the United States Government hereby makes no responsibility, nor any obligation whatsoever, and the fact that the Government may have furnished, furnished, or in any way supplied the said drawings, specifications, or other data is not to be regarded by implication or otherwise as in any manner becoming the holder or any other person or corporation, in conveying any right or permission to manufacture, sell, or use any patented invention that may in any way be related thereto.

This military standard is approved by the Department of Defense and is mandatory on all activities. Subsequent changes and design applications and for repetitive use shall be made from this document.

FED. SUP CLASS 5140									
NOMINAL SIZE		1.125		1.250		1.375		1.500	
THREADS PER INCH		7 (a) 12		7 (a) 12		6 (a) 12		6 (a) 12	
ASSEMBLED INSERT	FD, MAX, CLASS 2B	1.0616	1.0787	1.1668	1.2039	1.2771	1.3291	1.4022	1.4542
	FD, MAX, CLASS 3B	1.0393	1.0768	1.1644	1.2019	1.2745	1.3270	1.3996	1.4522
	FD, MIN, ALL CLASSES	1.0322	1.0709	1.1572	1.1959	1.2667	1.3209	1.3917	1.4459
	MINOR DIA, MAX, CLASS 2B	.998	1.053	1.123	1.172	1.225	1.303	1.350	1.428
	MINOR DIA, MAX, CLASS 3B	.9875	1.0443	1.1125	1.1698	1.2146	1.2948	1.3396	1.4198
	MINOR DIA, MIN, ALL CLASSES	.9703	1.0350	1.0950	1.1600	1.1950	1.2850	1.3200	1.4100
	MIN LENGTH OF INSERT WHEN								
	NOMINAL LENGTH = 1 DIA	1.018	1.062	1.143	1.188	1.250	1.312	1.375	1.438
	NOMINAL LENGTH = 1-1/2 DIA	1.580	1.625	1.768	1.812	1.938	2.000	2.125	2.188
	NOMINAL LENGTH = 2 DIA	2.143	2.188	2.393	2.438	2.625	2.688	2.875	2.938
TAPPED HOLE	DEPTH OF BLIND HOLE, MIN WHEN								
	NOMINAL LENGTH = 1 DIA	1.911	1.583	2.036	1.708	2.292	1.833	2.417	1.958
	NOMINAL LENGTH = 1-1/2 DIA	2.473	2.146	2.661	2.333	2.979	2.521	3.167	2.708
	NOMINAL LENGTH = 2 DIA	3.036	2.708	3.286	2.958	3.667	3.208	3.917	3.458
	MIN FULL THREAD WHEN								
	NOMINAL LENGTH = 1 DIA	1.270	1.210	1.390	1.330	1.540	1.460	1.670	1.580
	NOMINAL LENGTH = 1-1/2 DIA	1.830	1.770	2.020	1.960	2.230	2.150	2.420	2.330
	NOMINAL LENGTH = 2 DIA	2.390	2.330	2.640	2.580	2.920	2.830	3.170	3.080
	FD, MAX FOR CLASS 2B INSERTS	1.2242	1.1860	1.3524	1.3112	1.4926	1.4364	1.6177	1.5615
	CLASS 3B INSERTS	1.2239	1.1841	1.3490	1.3092	1.4900	1.4343	1.6151	1.5595
FD, MIN, ALL CLASSES	1.2178	1.1792	1.3428	1.3042	1.4832	1.4292	1.6082	1.5542	
MINOR DIA, MAX, ALL CLASSES	1.186	1.159	1.311	1.284	1.436	1.409	1.571	1.534	
MINOR DIA, MIN, ALL CLASSES	1.171	1.140	1.296	1.265	1.421	1.390	1.546	1.515	
MAJOR DIA, MIN, ALL CLASSES	1.2850	1.2187	1.4100	1.3437	1.5620	1.4687	1.6870	1.5937	
K	MAX LENGTH OF BOLT PROJECTION IF TANG IS NOT REMOVED, WHEN INSERT								
	NOMINAL LENGTH = 1 DIA	1.054	1.083	1.179	1.208	1.292	1.333	1.417	1.458
	NOMINAL LENGTH = 1-1/2 DIA	1.616	1.646	1.804	1.833	1.979	2.021	2.167	2.208
	NOMINAL LENGTH = 2 DIA	2.179	2.208	2.429	2.458	2.667	2.708	2.917	2.958
R	COUNTERSINK DIAMETER								
	MAXIMUM	1.320	1.260	1.450	1.380	1.600	1.510	1.730	1.630
	MINIMUM	1.280	1.220	1.410	1.340	1.540	1.470	1.690	1.590
N	MIN LENGTH OF BOLT FIRST FULL THREAD PROJECTION FOR THE SCREW LOCKING INSERT ASSEMBLY, WHEN INSERT								
	NOMINAL LENGTH = 1-1/2 DIA								
	NOMINAL LENGTH = 2 DIA								
(a) NOT RECOMMENDED FOR NEW DESIGN, SEE MIL-S-7742 FOR RECOMMENDED SERIES.									
THIS IS A DESIGN STANDARD. NOT TO BE USED AS A PART NUMBER.									
P.A. USAF - AFSC		TITLE				MILITARY STANDARD			
Other Cost		INSERTS, SCREW THREADS, HELICAL COIL, ASSEMBLY AND HOLES, DIMENSIONS FOR				MS33646			
Army - CE									
Navy - 60									
PROCUREMENT SPECIFICATION		SUPERSEDES				SHEET 5			

FOR CHANGES SEE SHEET 1.
REVISED (A)
APPROVED 17 JUL 61

APPROVED 17 JUL 61 REVISED (A) FOR CHARGES SEE SHEET 1.