


The elements for acquiring the product(s) described hereby shall consist of this specification sheet and the issue of the following specification listed in that issue of the DoD188 specified in the solicitation: MIL-R-12144

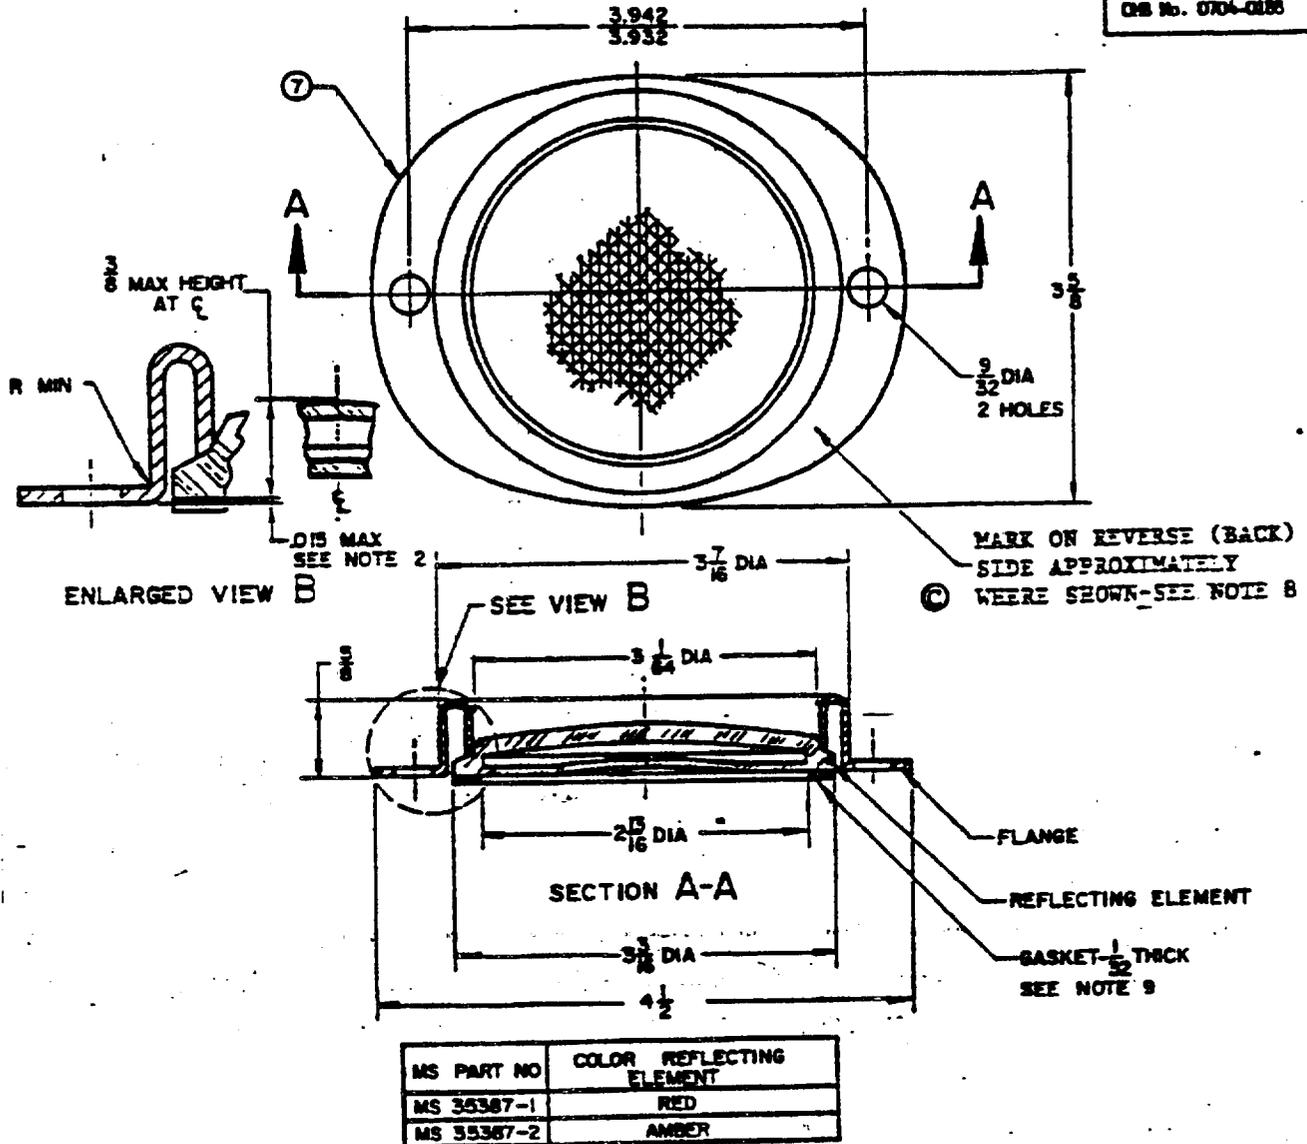

NOTES:

1. PERFORMANCE, FINISH, AND TESTS SHALL BE LAW PROCUREMENT SPECIFICATION.
2. BASE OF REFLECTING ELEMENT SHALL BE FLUSH TO .015 INSIDE FLANGE MOUNTING SURFACE.
3. UNLESS OTHERWISE SPECIFIED, DIMENSIONS ARE IN INCHES; TOLERANCES: ±1/64 ON FRACTIONS.
4. REFERENCED DOCUMENTS SHALL BE OF THE ISSUE IN EFFECT ON DATE OF INVITATION FOR BID.
5. THIS STANDARD TAKES PRECEDENCE OVER PROCUREMENT DOCUMENTS REFERENCED HEREIN.
6. THIS STANDARD IS NOT INTENDED TO LIMIT CONSTRUCTION, OTHER THAN TO FEATURES SHOWN HEREON BY DIMENSIONS, NOTATIONS, OR REFERENCED DOCUMENTS.
7. PERIMETER MUST BE ELLIPSOIDAL WITHIN DIMENSIONS GIVEN.
8. MARKING SHALL BE IN ACCORDANCE WITH MIL-STD-130.
9. RUBBER, GRADE SC 610, SPECIFICATION MIL-R-3065.

© DENOTES CHANGE FROM PREVIOUS ISSUE

PREPARING ACTIVITY: Army-AT
 CUSTODIANS: ARMY-AT NAVY-AIR FORCE-DLA
 REVIEW: GL
 USER:
 PROJECT NUMBER: 9905-0304

MILITARY SPECIFICATION SHEET
 TITLE:
 Reflector, Indicating Clearance

SPECIFICATION SHEET NUMBER:
 MS35387c 25 May 90
 SUPERSEDING:
 MS35387b 20 Jun 61
 AMSC-NA PSC-9905

This specification is approved for use by all Departments and Agencies of the Department of Defense.