


This document has been promulgated by the Department of Defense as the military standard to limit the selection of the item, product or design covered herein in engineering, design and procurement. This standard shall become effective not later than 90 days after the latest date of approval shown.

FED SUP CLASS  
5940

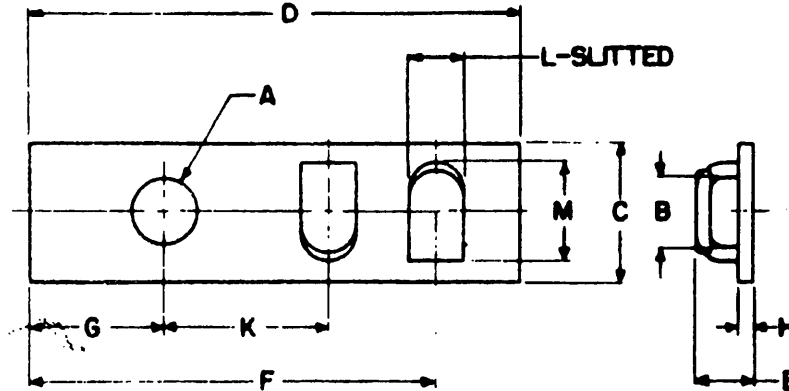

DASH NO	FIIN	WIRE SIZE AWG NOM	STUD SIZE	A HOLE DIA		B	C	D	E	F	G	H	K	L	M
				MIN	MAX										
1	MS-9371	6	6	.141	.153	5/32	5/16	1-1/8	1/8	15/16	5/16	.032	3/8	1/8	7/32

**MATERIAL:** COPPER, ANNEALED - SPECIFICATION QQ-C-576.

**FINISH:** HOT TIN DIP OR ELECTRODEPOSITED TIN ALL OVER, MINIMUM THICKNESS .0006 INCHES.

- NOTES:**
1. ALL DIMENSIONS IN INCHES. TOLERANCES: FRACTIONAL  $\pm 1/64$  UNLESS OTHERWISE SPECIFIED.
  2. REMOVE ALL BURRS.
  3. REFERENCED DOCUMENTS OF ISSUE IN EFFECT ON DATE OF INVITATION FOR BIDS SHALL APPLY.
  4. THE MS PART NUMBER CONSISTS OF THE MS NUMBER PLUS THE DASH NUMBER.

COORDINATING ORG SHIPS USAF	OTHER INT. A-SUB T E B-A OR Y N-	<b>MILITARY STANDARD</b> <b>TERMINAL LUG SOLDER TYPE,</b> <b>COPPER STAMPING, ONE HOLE, FLAT SLITTED.</b>	<b>MS 35432</b>
REPLACEMENT SPECIFICATION MIL-T-15659			UNIT 1 OF 1

DD FORM 672-1

APPROVED 5 JULY 55 REVISED A 23 JULY 56

This document, drawings, specifications, or other data are used for any purpose other than in connection with a definitely related Government procurement operation, the United States Government thereby incurs no responsibility. It is not to be regarded as a contract, and the fact that the Government may have furnished it in any way supplied the said drawings, specifications, or other data is not to be regarded as an implication of endorsement or approval of the product, process, or other data shown or referred to in any way by the Government.