


This document has been promulgated by the Department of Defense as the military standard to limit the selection of the item, product or design covered herein in engineering, design and procurement. This standard shall become effective not later than 90 days after the latest date of approval shown.

FED SUP CLASS
5940

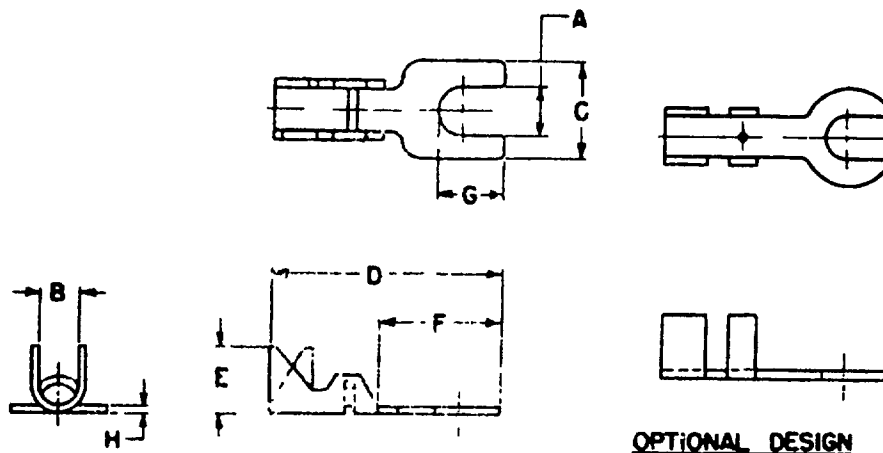

OPTIONAL DESIGN

DASH NO.	FIN	WIRE SIZE AWG NOM	STUD SIZE	A		B	C	D	E	F	G	H ±.003
				MIN	MAX							
1		12	10	.193	.205	5/32	13/32	1-1/32	11/32	1/2	5/16	.032
2		10	6	.141	.153	7/64	5/16	5/8	1/8	11/32		.025
3		8	10	.193	.205	9/64	1/2	15/16	3/16	1/2	11/32	
4												

MATERIAL: COPPER, ANNEALED - SPECIFICATION QQ-C-576.

FINISH: HOT TIN DIP OR ELECTRODEPOSITED TIN ALL OVER, MINIMUM THICKNESS .0006 INCHES.

NOTES: 1. ALL DIMENSIONS IN INCHES. TOLERANCES FRACTIONAL $\pm 1/64$ UNLESS OTHERWISE SPECIFIED.

2. REMOVE ALL BURRS.

3. REFERENCED DOCUMENTS OF ISSUE IN EFFECT ON DATE OF INVITATION FOR BIDS SHALL APPLY.

4. THE MS PART NUMBER CONSISTS OF THE MS NUMBER PLUS THE DASH NUMBER.

APPROVED 5 JULY 55 REVISED A 23 JULY 56

CUSTOMER ORD SHEETS USAF	OTHER INT. - STATE - ACRY -	MILITARY STANDARD TERMINAL, LUG, SOLDER TYPE, COPPER STAMPING, INSULATION GRIP, SLOTTED	MS35440
PERFORMANCE SPECIFICATION MIL-T-15659		SUPERSEDES:	DASH 1 OF 1

DD FORM 672-1