


FED SUP CLASS
8120

NOTICE: When Government drawings, specifications, or other data are used for any purpose other than in connection with a definitely related Government procurement operation, the United States Government thereby incurs no responsibility or obligation, and it is not to be regarded as an endorsement, approval, or recommendation of the views or products herein, or as an acknowledgment of the propriety of their use, or as an acknowledgment of the propriety of their use, or as an acknowledgment of the propriety of their use.

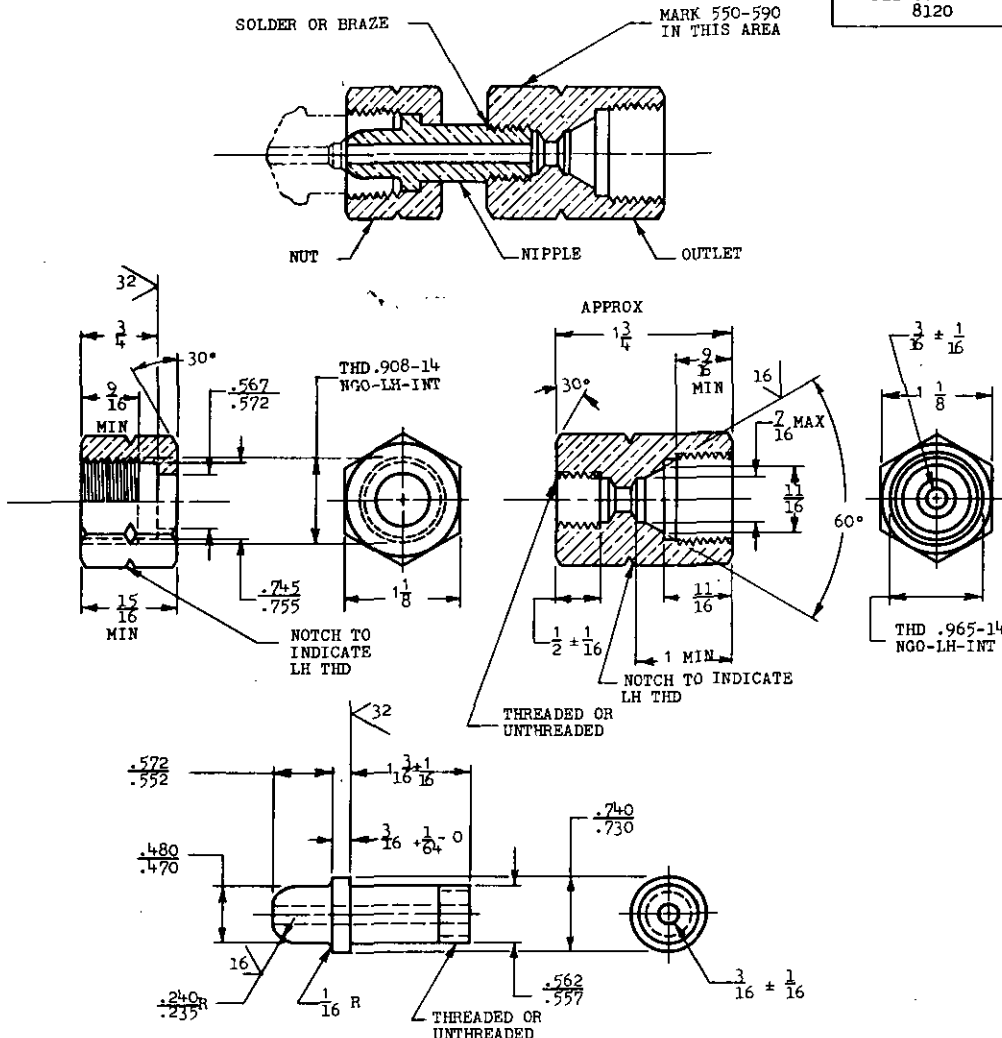

**(A) CANCELLED AFTER 29 NOV 1968
NO SUPERSEDING STANDARD**

MS PART NO.	FIIN
MS 35662-1	

NOTES:

1. THIS STANDARD TAKES PRECEDENCE OVER DOCUMENTS REFERENCED HEREIN.
2. REFERENCED DOCUMENTS SHALL BE OF THE ISSUE IN EFFECT ON DATE OF INVITATIONS FOR BID.
3. MATERIAL: BRASS, LEADED, FREE MACHINING, FS QQ-B-626, COMP 22.
4. NOTCH TO INDICATE LH THREAD SHALL BE 60° x 1-5/32 in. DIA.
5. CHAMFER ON HEXAGON OF NUT AND OUTLET SHALL BE 30° x 1-1/8 in. DIA.
6. UNLESS OTHERWISE SPECIFIED LINEAR TOLERANCES SHALL BE ± 1/64 in., ANGULAR TOLERANCES SHALL BE ± 1/2°.
7. ALL DIMENSIONS IN INCHES.
8. THREADS SHALL BE IN ACCORDANCE WITH SCREW THREAD STANDARDS FOR FEDERAL SERVICES, HANDBOOK H-28.

THIS DOCUMENT HAS BEEN PROMULGATED BY THE DEPARTMENT OF DEFENSE AS THE MILITARY STANDARD TO LIMIT THE SELECTION OF THE ITEM, PRODUCT OR DESIGN COVERED HEREIN IN ENGINEERING, DESIGN AND PROCUREMENT. THIS STANDARD SHALL BECOME EFFECTIVE NOT LATER THAN 90-DAYS AFTER THE LATEST DATE OF APPROVAL SHOWN.

CUSTODIANS ARMY-CE	OTHER INT. A-CO	MILITARY STANDARD	MS 35662
NAVY-SHIPS	AF-AMCMdOrY		
AF-USAF	AF-	ADAPTER, CYLINDER VALVE; BRASS, CLASS 550-590, AIR, ARGON, NITROGEN, OIL PUMPED, 2200 PSI WORKING PRESSURE	
PROCUREMENT SPECIFICATION MIL-A-16288	SUPERSEDES:		SHEET 1 OF 1

DD FORM 1 OCT 52 672-1

APPROVED 12 Mar 1957 REVISED (A) 29 NOV 1968