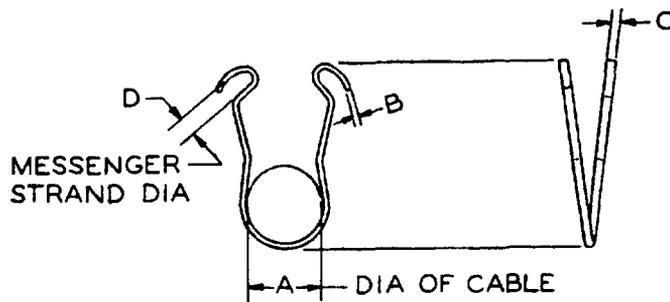


FED' SUP CLASS
5975

DASH NO	DIMENSIONS			
	A	B	C	D
-1	1 1/2	.091	.180	5/16
-2	2	.125	.225	5/16
-3	2 1/2	.125	.225	3/8
-4	3	.125	.225	7/16
-5	1 1/2	.091	.180	3/8
-6	2	.125	.225	3/8

NOTES.

- 1 REFERENCED DOCUMENTS SHALL BE OF THE ISSUE IN EFFECT ON DATE OF INVITATIONS FOR BID.
- 2 THIS STANDARD TAKES PRECEDENCE OVER DOCUMENTS REFERENCED HEREIN
- 3 RING SHALL BE MADE FROM WIRE COMPLYING WITH FEDERAL SPECIFICATION QQ-W-405. (A₁)
4. RING SHALL BE HOT DIP GALVANIZED IN ACCORDANCE WITH MILITARY SPECIFICATION MIL-2-17871

Reviewer/user information is current as of the date of this document. For future confirmation of changes to this document, draft circulation should be based on the information in the current DODISS (FSC listing) Navy MOB YD/ Army MOB RL/ AF B5/ B5/

This military standard has been approved by the Department of Defense and is mandatory for use by all Departments and Agencies of the Department of Defense. Selection for all new engineering and design applications and for repetitive use shall be made from this document.

APPROVED 18 JULY 58 REVISED (A₂) 19 December 1967

ALL DIMENSIONS IN INCHES

P. A.	EL.	TITLE	MILITARY STANDARD
Other Cont.	YD	HANGER, CABLE (POLE LINE)	MS39026
	82		
PROCUREMENT SPECIFICATION MIL-H-55053	SUPERSEDES	SHEET	1 OF 1