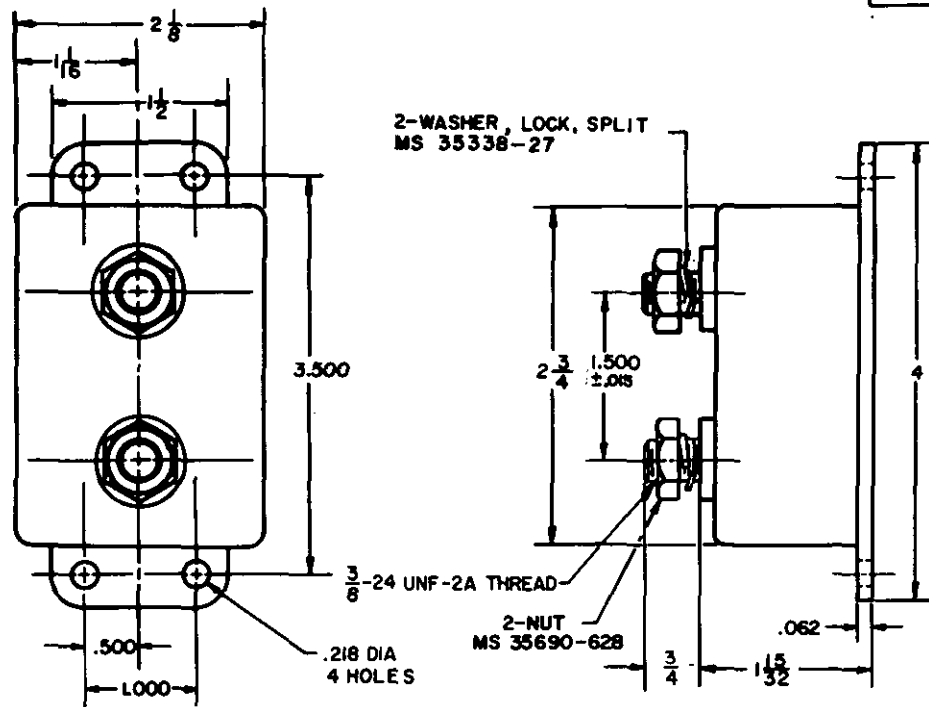


FED. SUP. CLASS  
5925

MS PART NUMBER	FIN	AMPERAGE RATING
39069-1		175
39069-2		200

CANCELLED AFTER 18 JANUARY 1966  
NO SUPERSEDING STANDARD  
USE MILITARY SPECIFICATION SHEET MIL-C-13516/8

**NOTES:****CLASSIFICATION:**

1. TYPE II (AUTOMATIC RESET), GRADE B (NONWATERPROOF), CLASS 2 (OVER 30 AMPERES RATING).

**TOLERANCES:**

2. UNLESS OTHERWISE SPECIFIED, DIMENSIONS ARE IN INCHES; TOLERANCES:  $\pm 1/32$  ON FRACTIONS;  $\pm .010$  ON DECIMALS.

**THREADS:**

3. SHALL BE IN ACCORDANCE WITH SCREW THREAD STANDARDS FOR FEDERAL SERVICES, HANDBOOK H28.

**GENERAL NOTES:**

4. THE MS PART NUMBER, AMPERAGE RATING AND MANUFACTURERS IDENTIFICATION SHALL BE CLEARLY AND PERMANENTLY MARKED ON THE OUTSIDE OF THE PART AND BE VISIBLE AT ASSEMBLY WITHOUT INTERFERING WITH ITS FUNCTION.
5. REFERENCED DOCUMENTS SHALL BE OF THE ISSUE IN EFFECT ON DATE OF INVITATION FOR BID.
6. THIS STANDARD IS NOT INTENDED TO LIMIT CONSTRUCTION TO FEATURES OTHER THAN SHOWN HEREON BY DIMENSIONS, NOTATIONS, AND REFERENCED DOCUMENTS.
7. THIS STANDARD TAKES PRECEDENCE OVER DOCUMENTS REFERENCED HEREIN.

(A) ENTIRE STANDARD REVISED

CUSTODIAN RA-ORD	OTHER INT. A- TC, CE N- AP-	<b>MILITARY STANDARD</b> CIRCUIT BREAKER: THERMAL, 30 VOLT DC, AUTOMATIC, NONWATERPROOF, 175 TO 200 AMP	<b>MS39069</b> (ORD)
PROCUREMENT SPECIFICATION MIL-C-13516	SUPERSEDES:	SHEET	OF

DD FORM 672-1 THIS STANDARD HAS BEEN APPROVED BY THE ORDNANCE CORPS (ORDNANCE TANK-AUTOMOTIVE COMMAND) DEPARTMENT OF THE ARMY AND IS MANDATORY FOR USE BY THAT ACTIVITY. ALL OTHER MILITARY ACTIVITIES ARE REQUIRED TO EMPLOY THIS STANDARD WHERE SUITABLE.

APPROVED 21 JAN 1969  
REVISED (A) 18 JANUARY 1966