


FED. SUP CLASS
8120

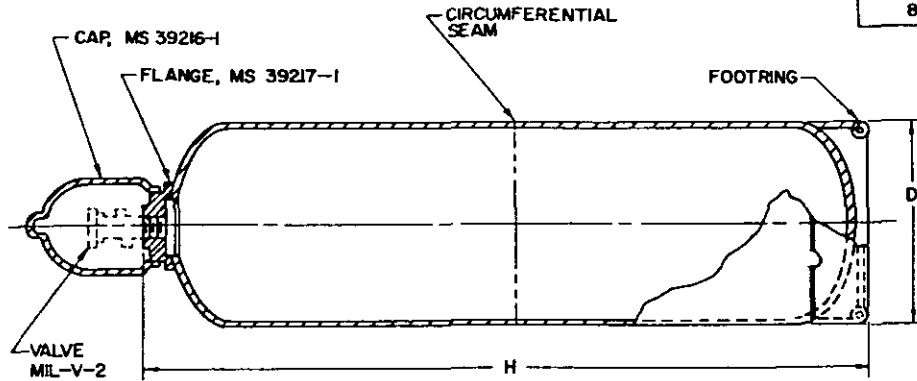

DASH NO.	GAS	CAP. LBS.	SERVICE PRESSURE PSI	DIMENSIONS		VALVE MIL-V-2/NO.	MAX TARE WEIGHT LB.	WATER WEIGHT LB.
				D IN.	H IN.			
-1	DELETED							
-2	BROMOTRIFLUOROMETHANE	150	400	12-3/16	36	13	66	122
-3	CHLORODIFLUOROMETHANE R-22	9	300	6-3/4	11	22	16	8.5
-4	R-22	44	300	8-3/16	27	22	25	42
-5	DICHLORODIFLUOROMETHANE R-12	10	300	6-3/4	11	22	16	8.5
-6	R-12	50	300	8-3/16	27	22	25	42
-7	R-12	145	300	12-3/16	36	22	51	122
-8	DICHLOROTETRAFLUOROETHANE R-114	10	300	6-3/4	11	22	16	8.5
-9	R-114	50	300	8-3/16	27	22	25	42
-10	DELETED							
-11	METHYL CHLORIDE			7/4	11	30	16	8.5
-12				16	27	30	25	42
-13				6	35	30	51	122
-14	DELETED							
-15	ETHYLENE OXIDE			16	24	22	19	21.5
-16	CHLORODIFLUOROMETHANE			36	22	22	51	122
-17				4	21	22	20	21.5
-18	DICHLORODIFLUOROMETHANE			6-3/4	21	22	20	21.5
-19	DICHLORODIFLUOROMETHANE			10-3/6	49	22	50	122

ⓑ CANCELED AFTER 12 April 1982
FOR FUTURE PROCUREMENT USE
RR-C-910/1

NOTE

1. DIMENSIONAL TOLERANCES: D - 1/4 INCH, H - 1 - INCH.
2. FOOT RING, IF USED, SHALL BE IN ACCORDANCE WITH DOT SPECIFICATIONS, AND SHALL HAVE A MINIMUM OF 2 VENT HOLES AND 2 DRAIN HOLES EQUALLY SPACED.
3. UNIT SHELL CONSTRUCTION WITH CONCAVE BOTTOM HEAD SHALL BE ACCEPTABLE WITHOUT FOOT RING.
4. SEAMS SHALL BE IN ACCORDANCE WITH DOT SPECIFICATIONS.
5. MS PART NUMBER SHALL CONSIST OF THE MS SHEET NUMBER PLUS THE DASH NUMBER.
6. FOR DESIGN FEATURE PURPOSES, THIS STANDARD TAKES PRECEDENCE OVER PROCUREMENT DOCUMENTS REFERENCED HEREIN.
7. REFERENCED DOCUMENTS SHALL BE OF THE ISSUE IN EFFECT ON DATE OF INVITATIONS FOR BID.
8. DASH NUMBER - 19, "HAWK MISSILE" REQUIREMENTS.

ENTIRE STANDARD REVISED

REVIEW ACTIVITIES: MU
USER ACTIVITIES: ML, YO, MC

THIS MILITARY STANDARD IS MANDATORY FOR USE BY ALL DEPARTMENTS AND AGENCIES OF THE DEPARTMENT OF DEFENSE. SELECTION FOR ALL NEW ENGINEERING AND DESIGN APPLICATIONS AND FOR REPEITIVE USE SHALL BE MADE FROM THIS DOCUMENT.

APPROVED 16 APRIL 1963 REVISED Ⓐ 21 NOVEMBER 1969 Ⓑ 12 APRIL 1982

P.A. ME Other Cost NAVY-SH AIR FORCE-68	TITLE CYLINDER, COMPRESSED GAS: DOT SPECIFICATION 4BA AND 4E	MILITARY STANDARD MS 39228
PROCUREMENT SPECIFICATIONS RR-C-910-MIL-C-5224	SUPERSEDES:	SHEET 1 OF 1