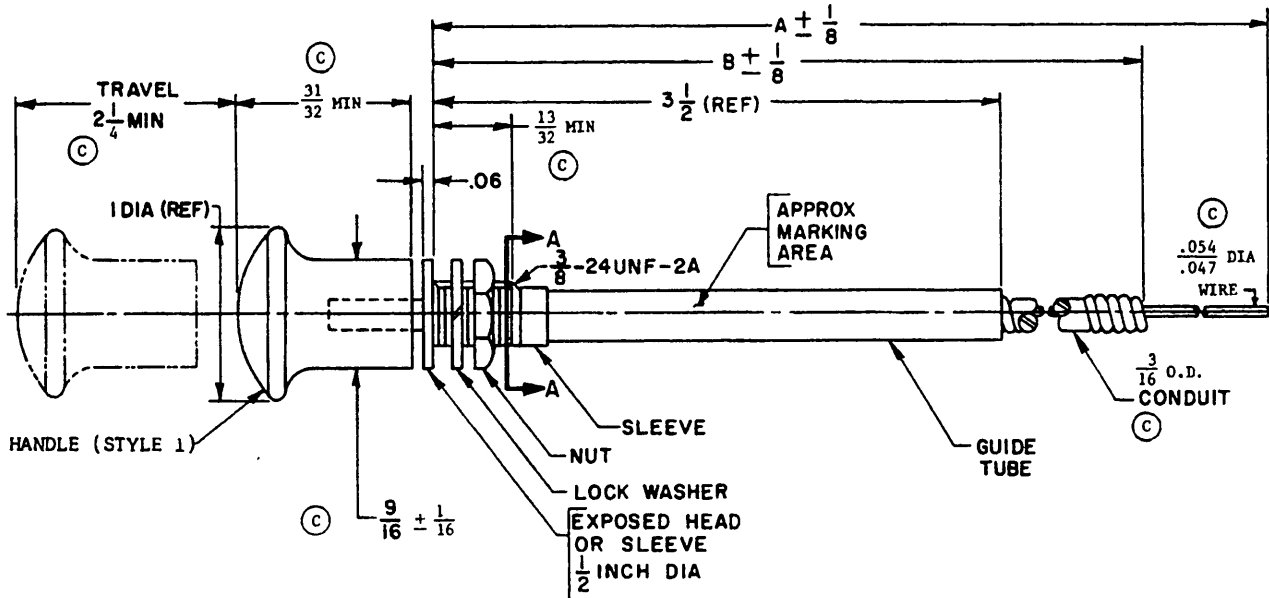


FED. SUP CLASS
2990

(C)

REQUIREMENTS:

1. TYPE I OF PROCUREMENT SPECIFICATION.
2. HANDLE SHALL BE PRIMED AND PAINTED PER TT-E-489 OR TT-E-529.
3. UNLINED CONDUIT SHALL BE PACKED WITH GREASE AT ASSEMBLY.

(C)

NOTES:

1. ALL DIMENSIONS ARE IN INCHES.
2. THIS STANDARD IS NOT INTENDED TO LIMIT CONSTRUCTION TO FEATURES OTHER THAN AS SHOWN HEREON BY DIMENSIONS AND NOTATIONS.
3. REFERENCED DOCUMENTS SHALL BE OF THE ISSUE IN EFFECT ON DATE OF INVITATION FOR BIDS.
4. THE USE OF RECYCLED MATERIALS WHICH MEET THE REQUIREMENTS OF THE APPLICABLE MATERIAL SPECIFICATION WITHOUT JEOPARDIZING THE INTENDED USE OF THE ITEM SHALL BE ENCOURAGED.

(C)

DENOTES CHANGES

P.A. ARMY-AT

Other Cust

AF- 11

TITLE

CONTROL ASSEMBLY, PUSH PULL :
CHOKER, ENGINE.

MILITARY STANDARD

MS500045

PROCUREMENT SPECIFICATION
MIL-C-62191

SUPERSEDES:

SHEET 1 OF 1

REVIEW ACTIVITY: DLA-CS

This military standard is approved for use by all Departments and Agencies of the Department of Defense. Selection for all new engineering and design applications and for repetitive use shall be made from this document when applicable.

APPROVED 12 APRIL 1966 REVISED (A) 16 JULY 1969 (B) 29 APRIL 1975 (C) 9 JAN 1981