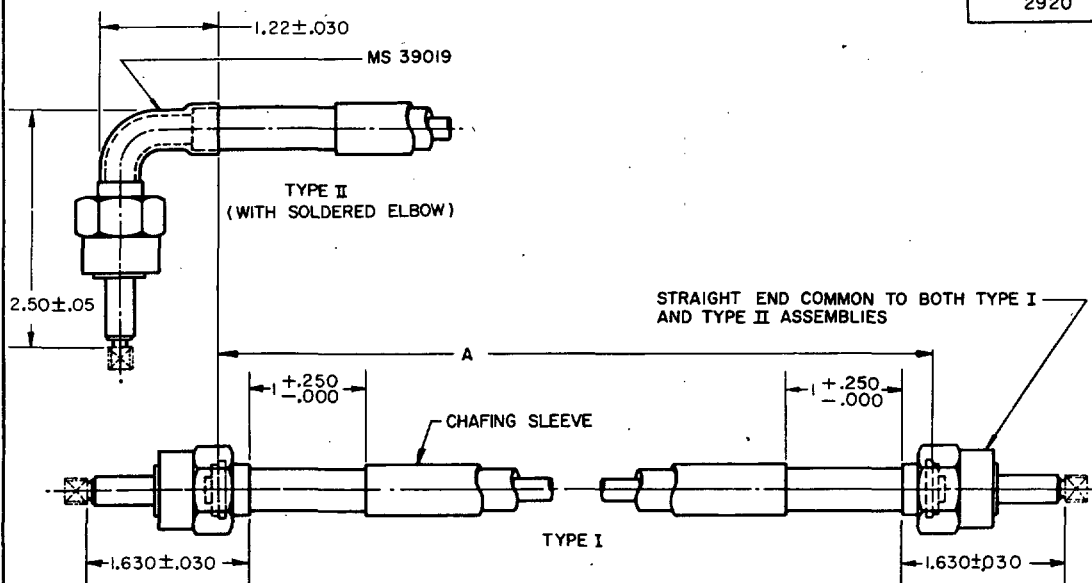


FED. SUP CLASS
2920REVIEW ACTIVITIES:
USER ACTIVITIES: ARMY-EL, GL; NAVY-MC

DASH NO.	TYPE	LENGTH "A"	
		INCHES	MILLIMETER
* 1	II	8 ± 1/8	203 ± 3
* 2	I	10 ± 1/8	254 ± 3
3	II	10	
* 4	I	12 ± 1/8	305 ± 3
* 5	II	14 ± 1/4	356 ± 6
6	I	17	
7	II	17	
* 8	I	20 ± 1/4	508 ± 6
9	II	20	

DASH NO.	TYPE	LENGTH "A"	
		INCHES	MILLIMETER
10	II	23	
* 11	I	26 ± 1/4	660 ± 6
12	I	29	
13	II	32	
14	II	40	
15	II	45	
16	II	50	
* 17	II	55 ± 1/2	1397 ± 13

NOTES:

- ASSEMBLIES SHALL CONFORM TO REQUIREMENTS OF MS51010.
- MATERIAL: SLEEVE, CHAFING, RUBBER .0312 INCH OR .79 MILLIMETERS THICKNESS MINIMUM, GRADE SC 515A₁, C₁, E₃, F₂, OR SC 615A₁, C₁, E₃, F₂, OF MIL-R-3065 AND MIL-STD-417.
- THE MS PART NUMBER CONSISTS OF THE MS NUMBER PLUS THE DASH NUMBER.
- REFERENCED DOCUMENTS SHALL BE OF THE ISSUE IN EFFECT ON DATE OF INVITATIONS FOR BIDS.

NOTE:

CERTAIN PROVISIONS (IDENTIFIED BY *) OF THIS STANDARD ARE THE SUBJECT OF INTERNATIONAL STANDARDIZATION AGREEMENT NATO STANAG 4006. WHEN REVISION OR CANCELLATION OF THIS STANDARD IS PROPOSED WHICH WILL EFFECT OR VIOLATE THE INTERNATIONAL AGREEMENT CONCERNED, THE PREPARING ACTIVITY WILL TAKE APPROPRIATE RECONCILIATION ACTION THROUGH INTERNATIONAL STANDARDIZATION CHANNELS, INCLUDING DEPARTMENTAL STANDARDIZATION OFFICES, IF REQUIRED.

(A) ENTIRE STANDARD REVISED

P.A. ARMY-AT Other Cust NAVY-YD AF-82	INTERNATIONAL INTEREST	TITLE LEAD AND CONDUIT ASSEMBLY, ELECTRICAL: SHIELDED, WATERPROOF SPARK PLUG (OTHER THAN AIRCRAFT)	MILITARY STANDARD MS 51011
PROCUREMENT SPECIFICATION NONE	SUPERSEDES:	SHEET 1 OF 1	

DD FORM 1 SEP 57 672-1 (Coordinated)

*U.S. GOVERNMENT PRINTING OFFICE: 1967-251-515/3880

APPROVED 14 APRIL 1958 REVISED (A) 3 NOVEMBER 1966

This military standard has been approved by the Department of Defense and is mandatory for use by all Departments and Agencies of the Department of Defense. Selection for all new engineering and design applications and for repetitive use shall be made from this document.