


REVIEWER: ARMY-NE DLA-CS
USER: NAVY-MC;

This military standard is approved for use by all Departments and Agencies of the Department of Defense. Selection for all new engineering and design applications and for repetitive use shall be made from this document when applicable.

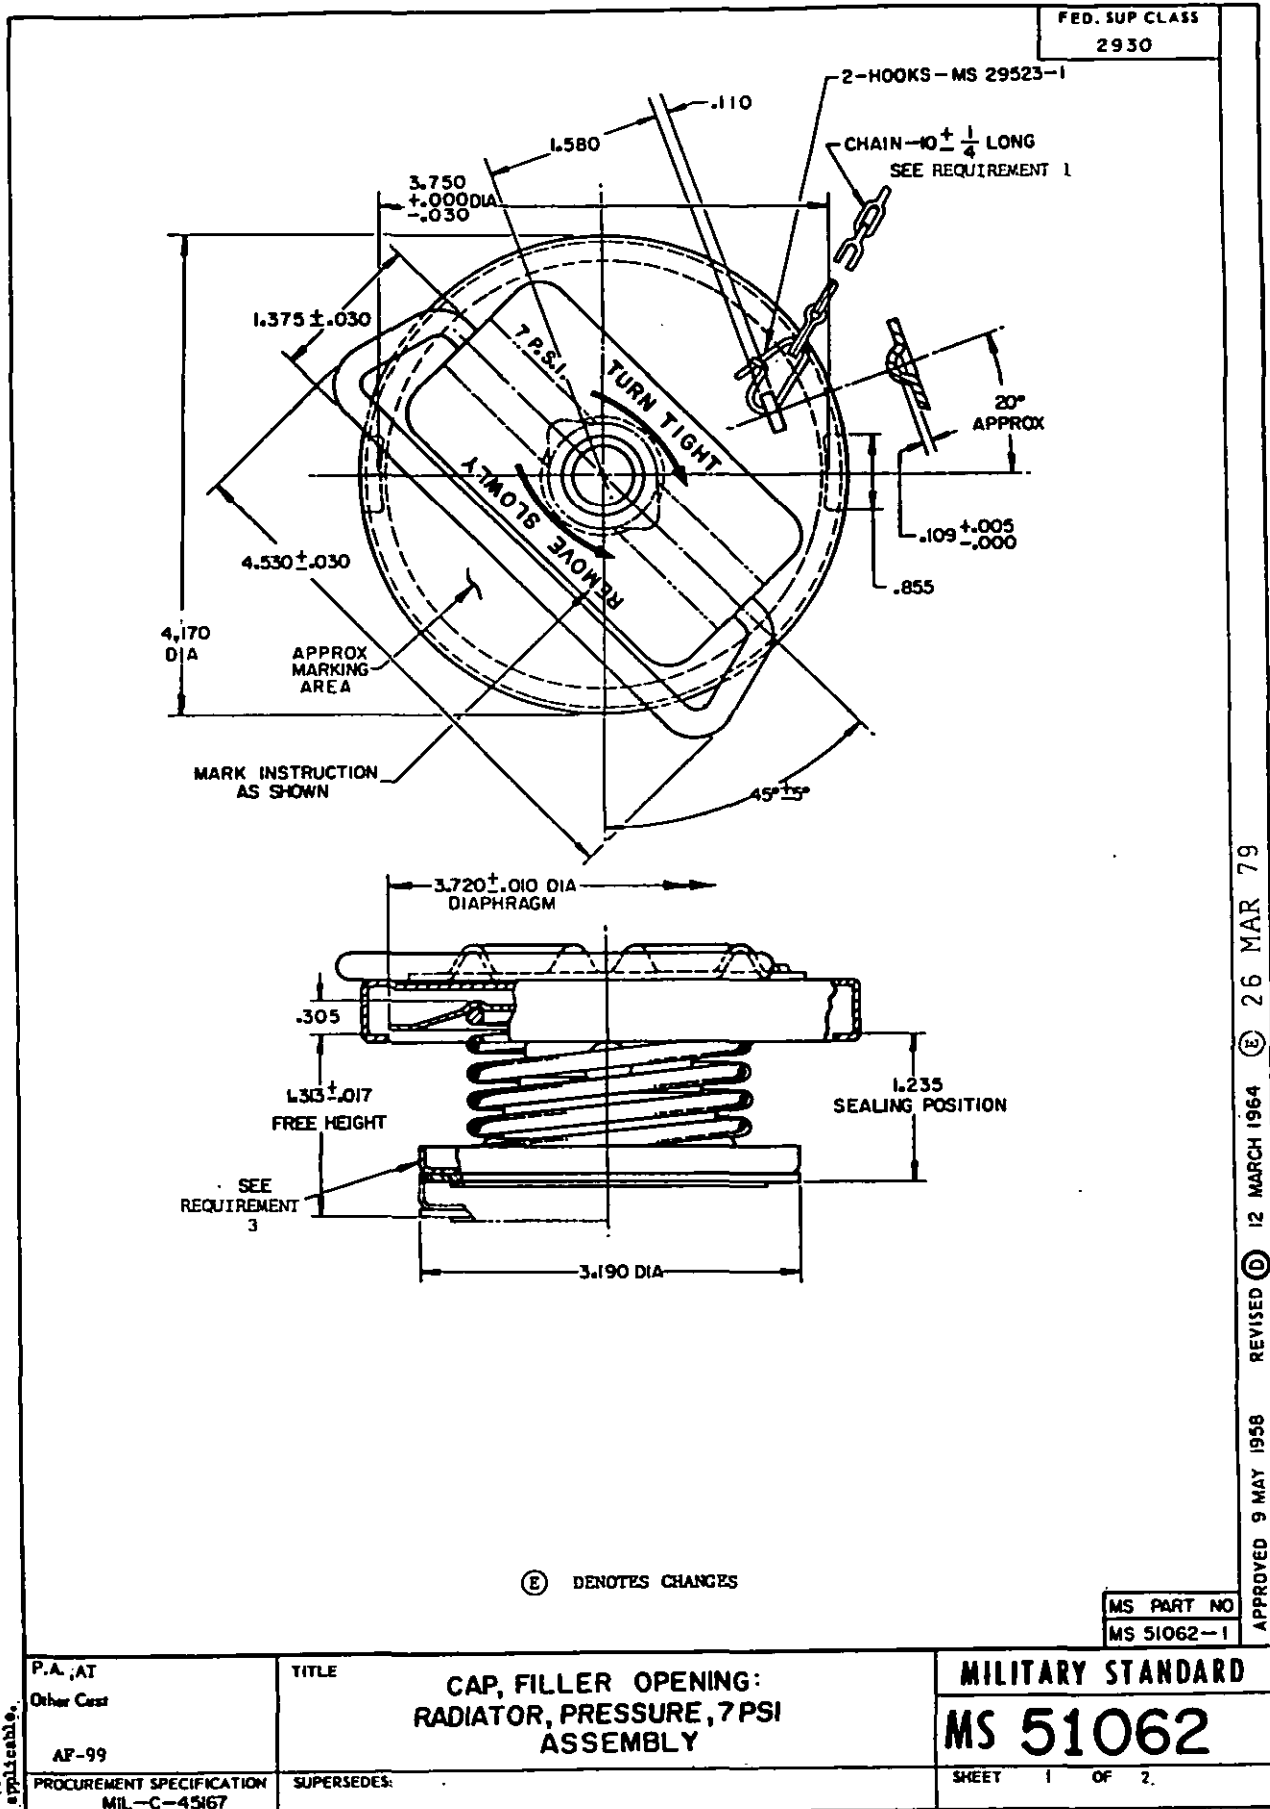

FED. SUP CLASS
2930**(E) REQUIREMENTS:**

1. CHAIN SHALL BE FABRICATED PER RR-C-271, TYPE II, CLASS 6, .028 THICK STEEL, ZINC COATED. OPTIONAL FINISH: CADMIUM PLATE PER QQ-P-416, TYPE II, CLASS 3. CHAIN SHALL HAVE APPROXIMATELY 20 LINKS PER FOOT.
2. THIS RADIATOR CAP IS INTENDED FOR USE WITH RADIATOR FILLER NECK MS51063. SPECIFIED TESTS SHALL APPLY WHEN CAP IS SO MATED.
3. BOTTOM PLATE SHALL ROTATE FREELY AFTER ASSEMBLY.
4. HANDLE AND METHOD OF ATTACHMENT TO MEET TORQUE REQUIREMENTS OF PROCUREMENT SPECIFICATION.
5. UNLESS OTHERWISE SPECIFIED, DIMENSIONS ARE IN INCHES; TOLERANCES ARE $\pm .010$ ON DECIMALS.
6. MARKING SHALL CONSIST OF THE MS PART NUMBER AND MANUFACTURER'S IDENTIFICATION IN ACCORDANCE WITH MIL-STD-130.

(E) NOTES:

1. FOR DESIGN PURPOSES, THIS STANDARD TAKES PRECEDENCE OVER PROCUREMENT DOCUMENTS REFERENCED HEREIN.
2. REFERENCED DOCUMENTS SHALL BE OF THE ISSUE IN EFFECT ON DATE OF INVITATION FOR BIDS.
3. THIS STANDARD IS NOT INTENDED TO LIMIT CONSTRUCTION TO FEATURES OTHER THAN SHOWN HEREON BY DIMENSIONS, NOTATIONS, AND REFERENCED DOCUMENTS.
4. THE USE OF RECYCLED MATERIALS WHICH MEET THE REQUIREMENTS OF THE APPLICABLE MATERIAL SPECIFICATIONS WITHOUT JEOPARDIZING THE INTENDED USE OF THE ITEM SHALL BE ENCOURAGED.

APPROVED 9 MAY 1958 REVISED (E) FOR CHANGES SEE SHEETS 1 & 2

P.A. Other Cust	TITLE CAP, FILLER OPENING: RADIATOR, PRESSURE, 7 PSI ASSEMBLY	MILITARY STANDARD MS 51062
PROCUREMENT SPECIFICATION	SUPERSEDES:	SHEET 2 OF 2