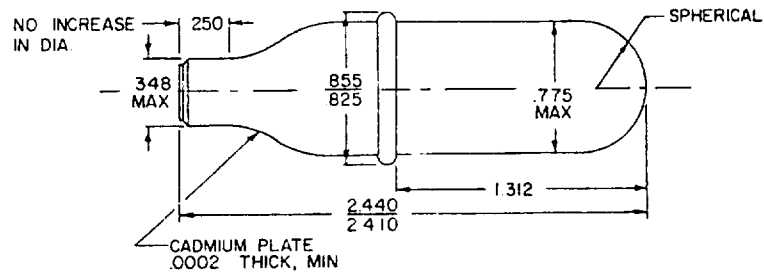


FED. SUP CLASS
2910REVIEW ACTIVITIES:
USER ACTIVITIES: AT, MC

NOTES:

1. ALL DIMENSIONS ARE IN INCHES.
2. CARTRIDGE SHALL BE COLD ROLLED STEEL AND CONFORM TO TYPE I OF PROCUREMENT SPECIFICATION.
3. MINIMUM VOLUME: 9cc. MINIMUM CONTENTS: 5.6 GRAMS.
4. WHEN FILLED, PORTIONS OF BULB ABOVE AND BELOW RIB MUST BE CONCENTRIC WITH EACH OTHER WITHIN .02" TOTAL INDICATOR READING.
5. UNLESS OTHERWISE SPECIFIED, TOLERANCES $\pm .005$ ON DECIMAL DIMENSIONS.
6. CARTRIDGE SHALL CONFORM TO REQUIREMENTS IN CFR 49.
7. REFERENCED DOCUMENTS SHALL BE OF THE ISSUE IN EFFECT ON THE DATE OF INVITATIONS FOR BID.
8. FOR DESIGN FEATURE PURPOSES, THIS STANDARD TAKES PRECEDENCE OVER PROCUREMENT DOCUMENTS REFERENCED HEREIN.

(A) ENTIRE STANDARD REVISED

THIS MILITARY STANDARD IS MANDATORY FOR USE BY ALL DEPARTMENTS AND AGENCIES OF THE DEPARTMENT OF DEFENSE. SELECTION FOR ALL NEW ENGINEERING AND DESIGN APPLICATIONS AND FOR REPETITIVE USE SHALL BE MADE FROM THIS DOCUMENT.

P.A. ME Other Cust NAVY - YD AIR FORCE - 82	TITLE CARTRIDGE, ENGINE STARTING (ENGINE COLD-STARTING AID)	MILITARY STANDARD MS 51325
PROCUREMENT SPECIFICATIONS: MIL-E-52649 (ME)	SUPERSEDES:	SHEET 1 OF 1

DD FORM 1 SEP 57 **672-1** (Coordinated)

PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE.

APPROVED 2 FEBRUARY 1960 REVISED (A) 27 JANUARY 1970