



LIQUID SIDE VENT MUST BE PROVIDED. LOCATION OPTIONAL

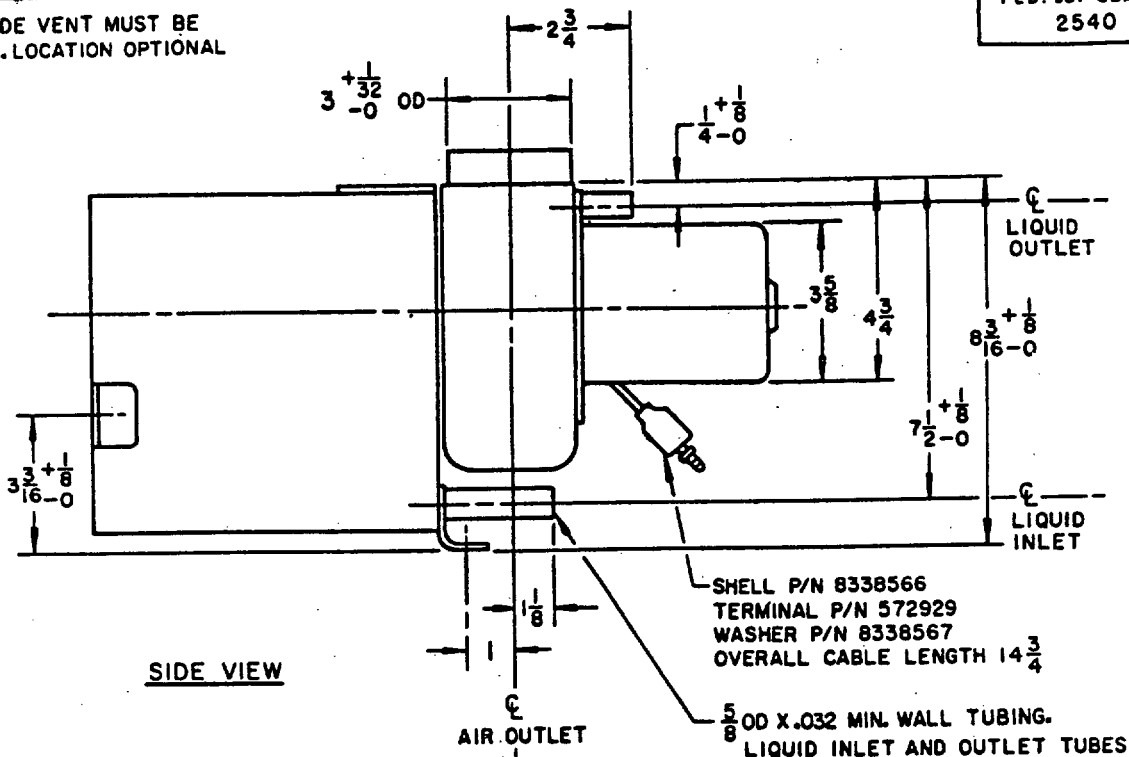

SIDE VIEW

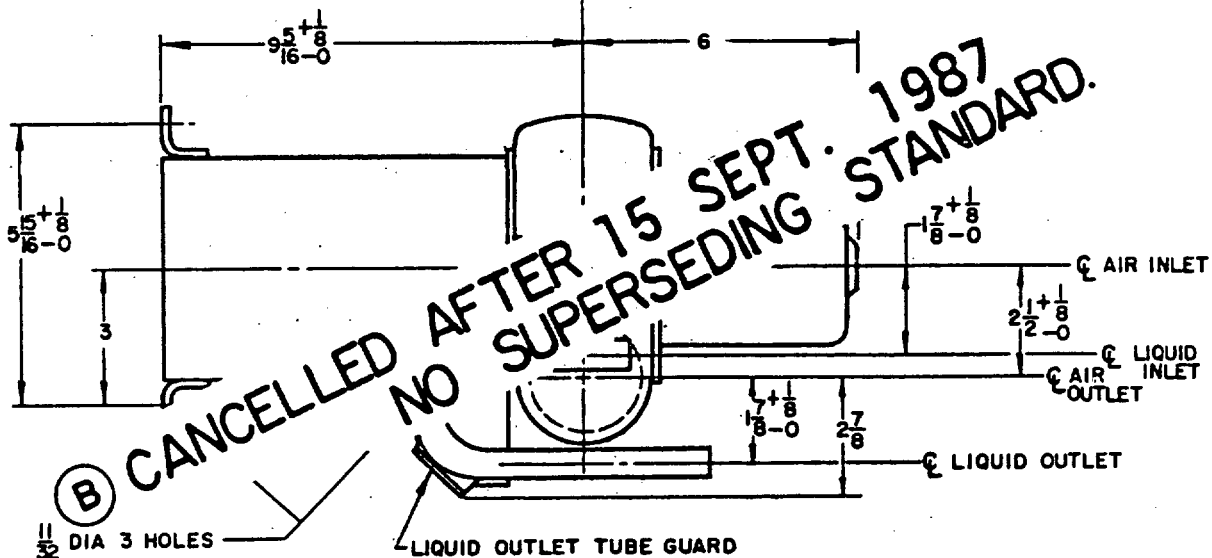

BOTTOM VIEW

NOTES:

1. THIS HEATER SHALL CONFORM TO TYPE II, CAPACITY "A" OF MIL-H-3199.
2. DIMENSIONS ARE IN INCHES, MAXIMUM, UNLESS OTHERWISE SPECIFIED.
3. REFERENCED DOCUMENTS SHALL BE OF THE ISSUE IN EFFECT ON DATE OF INVITATION FOR BID.
4. FOR DESIGN FEATURE PURPOSES THIS STANDARD TAKES PRECEDENCE OVER PROCUREMENT DOCUMENTS REFERENCED HEREIN.
5. THIS STANDARD IS NOT INTENDED TO LIMIT CONSTRUCTION AS TO FEATURES, OTHER THAN SHOWN HEREON; BY DIMENSIONS, NOTATIONS, OR REFERENCED DOCUMENTS.
6. MARKING SHALL CONSIST OF THE MS PART NUMBER AND THE MANUFACTURER'S IDENTIFICATION AND SHALL BE IN ACCORDANCE WITH MIL-STD-130.

ENTIRE STANDARD REVISED

MS PART NO.	FORMER DWG. NO.
MS 51327-1	8682953

P.A. MO(ATAC) Other Cust	TITLE HEATER, VEHICULAR COMPARTMENT: LIQUID COOLANT, 20,000 BTU/HR	MILITARY STANDARD	
		MS 51327(AT)	
PROCUREMENT SPECIFICATION MIL-H-3199	SUPERSEDES:	SHEET 1	OF 1

REVIEW ACTIVITY-ARMY-ME
DISTRIBUTION STATEMENT A. APPROVED FOR PUBLIC RELEASE

This standard has been approved by the U. S. Army Tank-Automotive Command, Department of the Army, and is mandatory for use by that activity. All other military activities are required to employ this standard where suitable.

CANCELLED AFTER 15 SEPT. 1987
NO SUPERSEDING STANDARD.

DISTRIBUTION IS UNLIMITED.

APPROVED 16 MARCH 1960 REVISED (A) 15 AUGUST 1966 (B) 15 SEPT. 1987