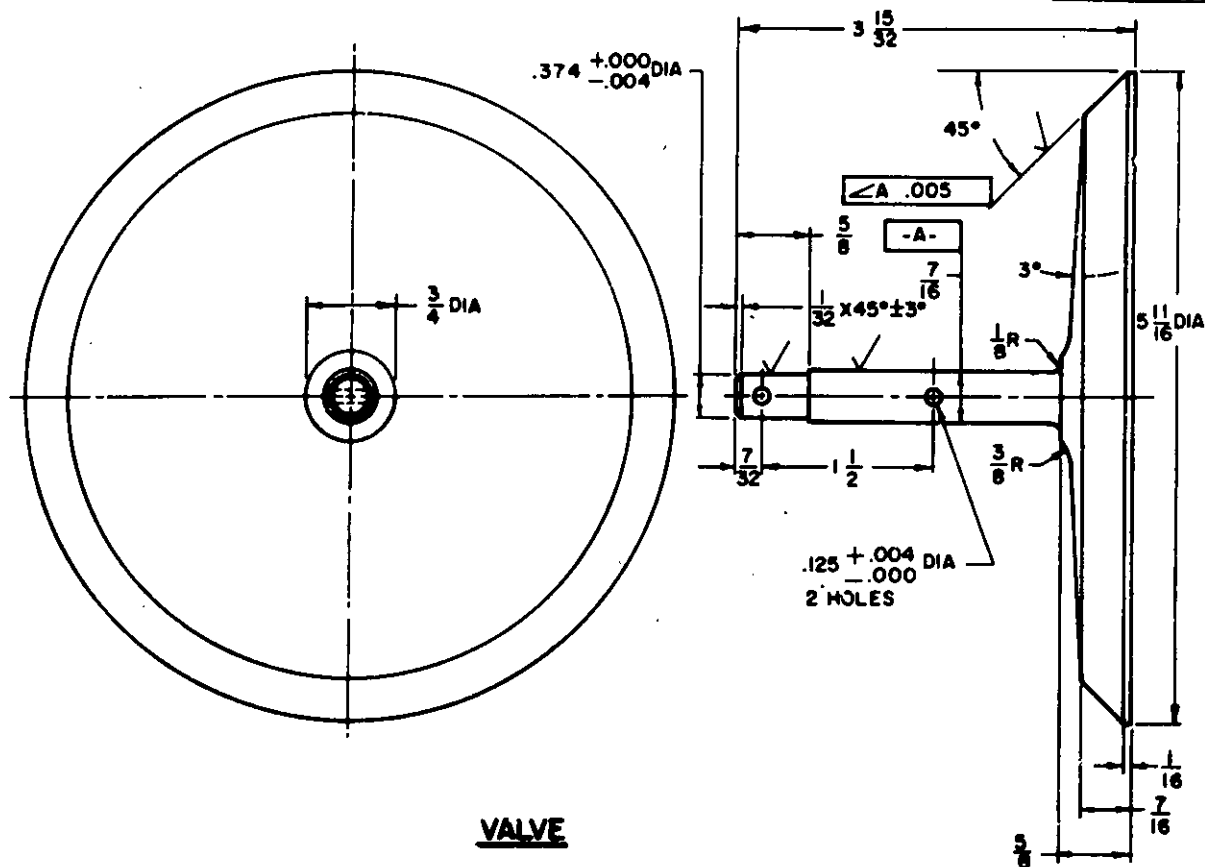


FED. SUP CLASS  
2590VALVE

## NOTES:

1. MATERIAL: STEEL, CASTING, (105-85) SPEC QQ-S. ALLOY 8125, 8130, 4130 OR 5130, GRADE D. STEEL FORGING
2. HEAT-TREAT: QUENCH AND TEMPER, B700
3. FINISH: CADMIUM PLATE IN ACCORDANCE WITH MIL-STD-13-28.
4. UNLESS OTHERWISE SPECIFIED, SURFACE FINISH SHALL BE TYPE II, CLASS 2.
5. UNLESS OTHERWISE SPECIFIED, SURFACE FINISH SHALL BE TYPE II, CLASS 2.
6. UNLESS OTHERWISE SPECIFIED, SURFACE FINISH SHALL BE TYPE II, CLASS 2.
7. UNLESS OTHERWISE SPECIFIED, SURFACE FINISH SHALL BE TYPE II, CLASS 2.

© CANCELLED AFTER 30 APRIL 1980.  
NO SUPERSEDING STANDARD.

MS PART NO.  
MS 51346-1

APPROVED 9 JANUARY 1961 REVISED (A) 18 OCTOBER 1966 (B) 20 SEPT 1977 (C) 30 APRIL 1980

P.A. ARMY-AT	TITLE	MILITARY STANDARD
Other Cust	SEAT, HULL DRAIN POPPET VALVE: ASSEMBLY, VEHICULAR, 5 INCH	MS51346 (AT)
PROCUREMENT SPECIFICATION NONE	SUPERSEDES	SHEET 1 OF 1

DD FORM 672-1 (Limited circulation)

PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE