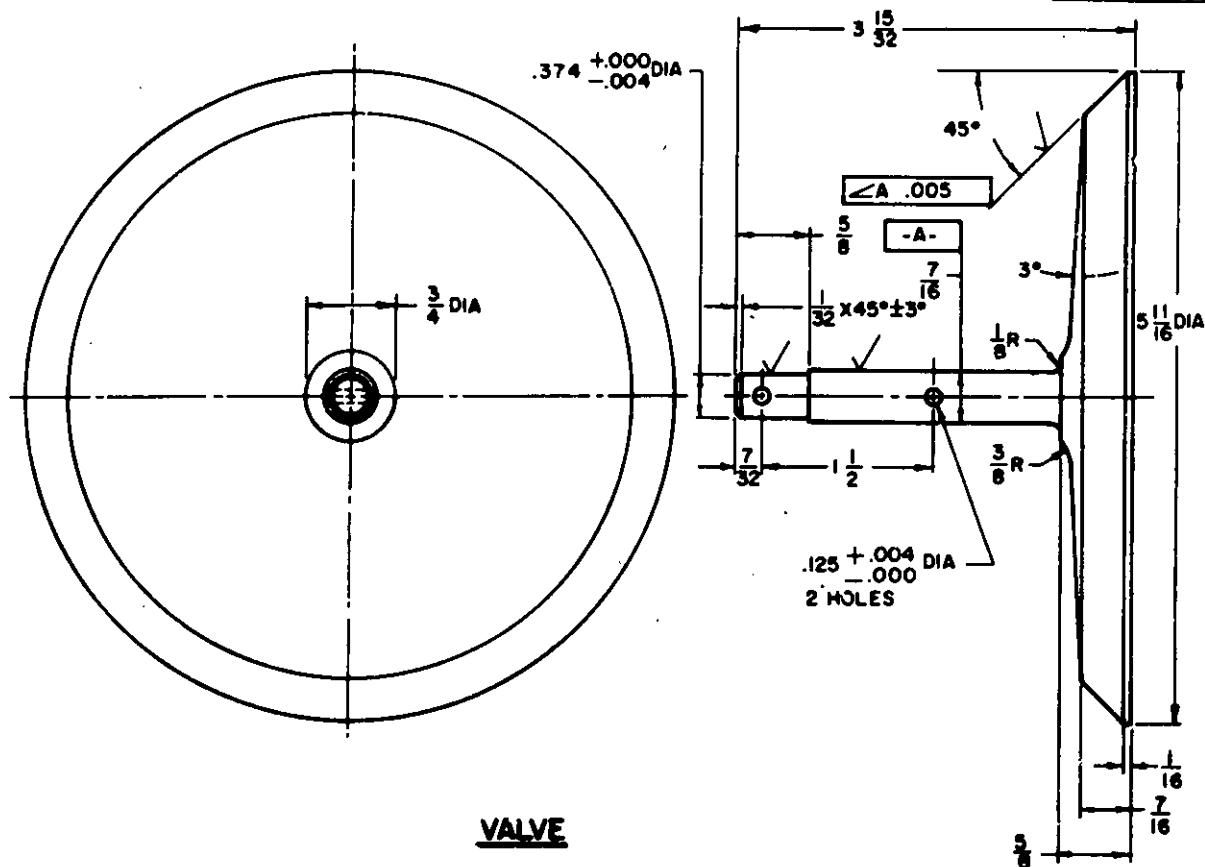


FED. SUP CLASS
2590VALVE

NOTES:

1. MATERIAL: STEEL, CASTING, (105-85) SPEC QQ-S. ALLOY 8125, 8130, 4130 OR 5130, GRADE D. STEEL FORGING
2. HEAT-TREAT: QUENCH AND TEMPER, B700
3. FINISH: CADMIUM PLATE IN ACCORDANCE WITH MIL-STD-13-28.
4. UNLESS OTHERWISE SPECIFIED, ALL DIMENSIONS SHALL BE IN INCHES, TYPE II, CLASS 2.
5. UNLESS OTHERWISE SPECIFIED, ALL DIMENSIONS SHALL BE IN INCHES, TYPE II, CLASS 2.
6. UNLESS OTHERWISE SPECIFIED, ALL DIMENSIONS SHALL BE IN INCHES, TYPE II, CLASS 2.
7. UNLESS OTHERWISE SPECIFIED, ALL DIMENSIONS SHALL BE IN INCHES, TYPE II, CLASS 2.

© CANCELLED AFTER 30 APRIL 1980.
NO SUPERSEDING STANDARD.

APPROVED 9 JANUARY 1961 REVISED (A) 18 OCTOBER 1966 (B) 20 SEPT 1977 (C) 30 APRIL 1980

MS PART NO.
MS 51346-1

P.A. ARMY-AT	TITLE	MILITARY STANDARD
Other Cust	SEAT, HULL DRAIN POPPET VALVE: ASSEMBLY, VEHICULAR, 5 INCH	MS51346 (AT)
PROCUREMENT SPECIFICATION NONE	SUPERSEDES	SHEET 1 OF 1

DD FORM 672-1 (Limited circulation)

PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE