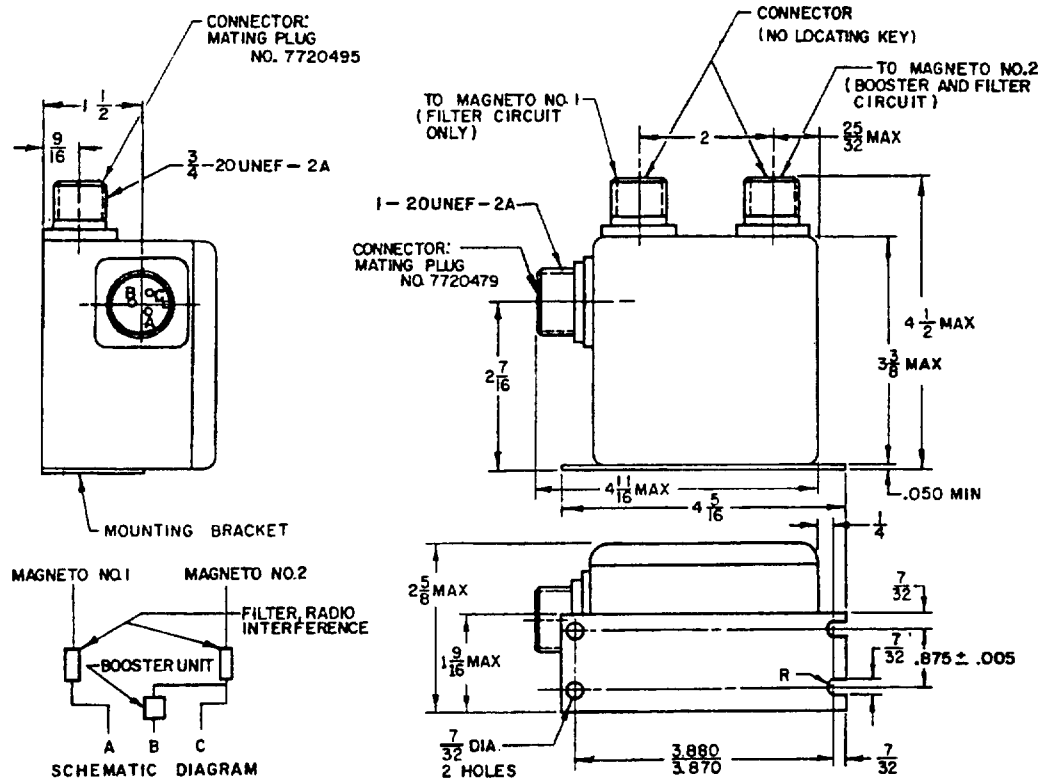


FED. SUP CLASS
2920REVIEW ACTIVITIES: ARMY-EL, ME
USER ACTIVITIES: NAVY-MC, YD

NOTES:

1. THREADS SHALL BE IN ACCORDANCE WITH SCREW THREAD STANDARDS FOR FEDERAL SERVICES, HANDBOOK H 28.
2. DIMENSIONS ARE IN INCHES. UNLESS OTHERWISE SPECIFIED, TOLERANCES ARE $\pm 1/32$.
3. FOR DESIGN FEATURE PURPOSES, THIS STANDARD TAKES PRECEDENCE OVER PROCUREMENT DOCUMENTS REFERENCED HEREIN.
4. THIS STANDARD IS NOT INTENDED TO LIMIT CONSTRUCTION TO FEATURES OTHER THAN AS SHOWN HEREON BY DIMENSIONS, NOTATIONS, AND REFERENCED DOCUMENTS.
5. REFERENCED DOCUMENTS SHALL BE OF THE ISSUE IN EFFECT ON DATE OF INVITATION FOR BID.
6. MARKING SHALL CONSIST OF THE MS PART NUMBER, VOLTAGE AND CURRENT RATING, AND THE MANUFACTURER'S IDENTIFICATION, IN ACCORDANCE WITH MIL-STD-130.

(C) ENTIRE STANDARD REVISED

MS PART NO. FORMER PART NO.
MS 51355-1 8719826

P.A. ARMY-AT

TITLE

Other Cust

COIL, STARTING-ENGINE IGNITION,
WITH FILTER, 24 VOLT DC

MILITARY STANDARD

AF-62

MS 51355

PROCUREMENT SPECIFICATION
MIL-C-45359

SUPERSEDES:

SHEET 1 OF 1

DD FORM 672-1 (Coordinated)

PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE.

☆ U. S. GOVERNMENT PRINTING OFFICE: 1969-393-066/S-2103

This military standard is mandatory for use by all Departments and Agencies of the Department of Defense. Selection for all new engineering and design applications and for repetitive use shall be made from this document.

APPROVED 9 MARCH 1961 REVISED (A) 4 OCTOBER 1967 (B) 23 JULY 1969 (C) 17 SEPTEMBER 1969