


USER ACTIVITIES: ARMY-MI, ME; NAVY-MC

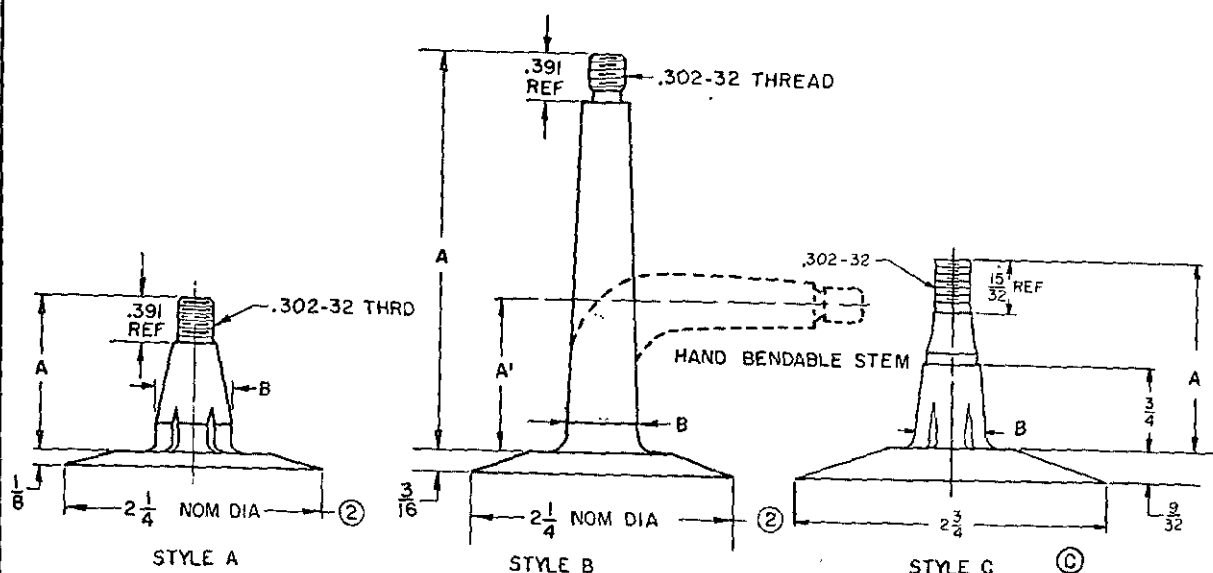

TYPE I, CLASS 1 - (AIR USE ONLY) OF PROCUREMENT SPECIFICATION

MS PART NO.	TR IDENT NO	STYLE	DIMENSIONS		
			A	A'	B
MS 51357-1	TR-13	A	1-3/8	-----	.460
MS 51357-2	TR-15	A	1-3/8	-----	.651
MS 51357-3	TR-25	A	1-15/16	-----	.651
MS 51357-4	TR-135	B	2-7/16	7/8	.615
MS 51357-5	TR-150	B	3-1/2	1 7/8 MAX	.615
MS 51357-6	TR-87A	B	1-3/4	19/32	.406
MS 51357-7	TR-300	C	1-31/32	-----	.615

TR DENOTES TIRE AND RIM ASSOCIATION

NOTES:

1. VALVE CORE, MS51377 AND VALVE GAP, MS51375 ARE INCLUDED AS PART OF THIS ASSEMBLY.
2. BASE CONFIGURATION OPTIONAL PROVIDED CIRCULAR BASE AREA AT VALVE AXIS IS 2-1/4 INCHES NOMINAL DIAMETER.
3. DIMENSIONS SHOWN ARE IN INCHES.
4. THIS STANDARD IS NOT INTENDED TO LIMIT CONSTRUCTION TO FEATURES OTHER THAN AS SHOWN HEREON BY DIMENSIONS, NOTATIONS AND REFERENCED DOCUMENTS.
5. FOR DESIGN FEATURE PURPOSES, THIS STANDARD TAKES PRECEDENCE OVER PROCUREMENT DOCUMENTS REFERENCED HEREIN.
6. REFERENCED DOCUMENTS SHALL BE OF THE ISSUE IN EFFECT ON DATE OF INVITATIONS FOR BID.
7. MARKING SHALL CONSIST OF THE MS PART NUMBER, T & R IDENTIFICATION NUMBER, AND MANUFACTURER'S IDENTIFICATION IN ACCORDANCE WITH MIL-STD-130 OR MIL-STD-129.

Ⓢ CANCELLED AFTER 18 FEBRUARY 1975

FOR NEW DESIGN AND PROCUREMENT USE TIRE AND RIM ASSOCIATION STANDARD YEARBOOK PER ZZ-V-25

P.A. ARMY-AT Other Cust NAVY-YD AF-84	TITLE VALVE, PNEUMATIC TIRE, INNER TUBE: RUBBER-COVERED STEM AND BASE, STD. BORE, VEHICULAR	MILITARY STANDARD MS 51357
PROCUREMENT SPECIFICATION ZZ-V-25	SUPERSEDES:	SHEET 1 OF 1