


FED. SUP CLASS
2640

USER ACTIVITIES: ARMY-MI, ME

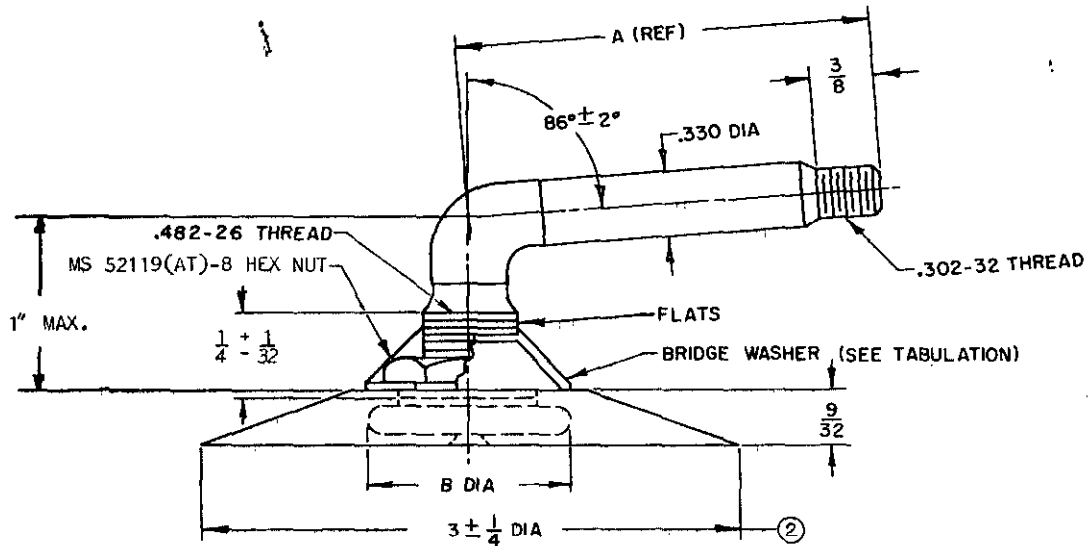

TYPE I, CLASS 3 OF PROCUREMENT SPECIFICATION

MS PART NO.	TR IDENT NO.	DIMENSIONS		BRIDGE WASHER
		A (REF)	B DIA	
MS 51359-1	TR-75 A	3	59/64	MS 52117(AT)-1
MS 51359-2	TR-77 A	4-1/8	1-1/16	MS 52117(AT)-2
MS 51359-3	TR-78 A	5	1-1/16	MS 52117(AT)-3
MS 51359-4	TR-175 A	4-1/2	1-1/16	MS 52117(AT)-2
MS 51359-5	TR-177 A	3-3/4	1-1/16	MS 52117(AT)-2
MS 51359-6	TR-179 A	5-9/16	1-1/16	MS 52117(AT)-4
MS 51359-7	TR-76 A	3-3/8	59/64	MS 52117(AT)-1

NOTES:

1. VALVE CORE, MS51377 AND VALVE CAP, MS51375 ARE INCLUDED AS PART OF THIS ASSEMBLY.
2. BASE CONFIGURATION OPTIONAL PROVIDED CIRCULAR BASE AREA AT VALVE AXIS IS $3 \pm \frac{1}{4}$ INCHES IN DIAMETER.
3. DIMENSIONS SHOWN ARE IN INCHES.
4. THIS STANDARD IS NOT INTENDED TO LIMIT CONSTRUCTION TO FEATURES OTHER THAN AS SHOWN HEREON BY DIMENSIONS, NOTATIONS AND REFERENCED DOCUMENTS.
5. FOR DESIGN FEATURE PURPOSES, THIS STANDARD TAKES PRECEDENCE OVER PROCUREMENT DOCUMENTS REFERENCED HEREIN.
6. REFERENCED DOCUMENTS SHALL BE OF THE ISSUE IN EFFECT ON DATE OF INVITATIONS FOR BID.
7. MARKING SHALL CONSIST OF THE MS PART NUMBER AND MANUFACTURER'S IDENTIFICATION, IN ACCORDANCE WITH MIL-STD-130.

① CANCELLED

AFTER 17 SEPT. 1975

FOR NEW DESIGN AND PROCUREMENT USE TIRE AND RIM ASSOCIATION STANDARD YEARBOOK PER ZZ-V-25

P.A. ARMY-AT Other Cust NAVY-YD AF-64	TITLE VALVE, PNEUMATIC TIRE, INNER TUBE: RUBBER BASE, METAL STEM, W/BODY THREADS STD. BORE, BENT 86°, VEHICULAR	MILITARY STANDARD	
		MS 51359	
PROCUREMENT SPECIFICATION ZZ-V-25	SUPERSEDES:	SHEET	OF

DD FORM 672-1 (Continued)

PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE.

This military standard is mandatory for use by all Departments and Agencies of the Department of Defense. Selection for all new engineering and design applications and for repetitive use shall be made from this document.

APPROVED 23 MARCH 1961 REVISED (A) 28 JUNE 1963 (B) 12 APRIL 1967 (C) 12 AUGUST 1971 (D) 17 SEPT. 1975