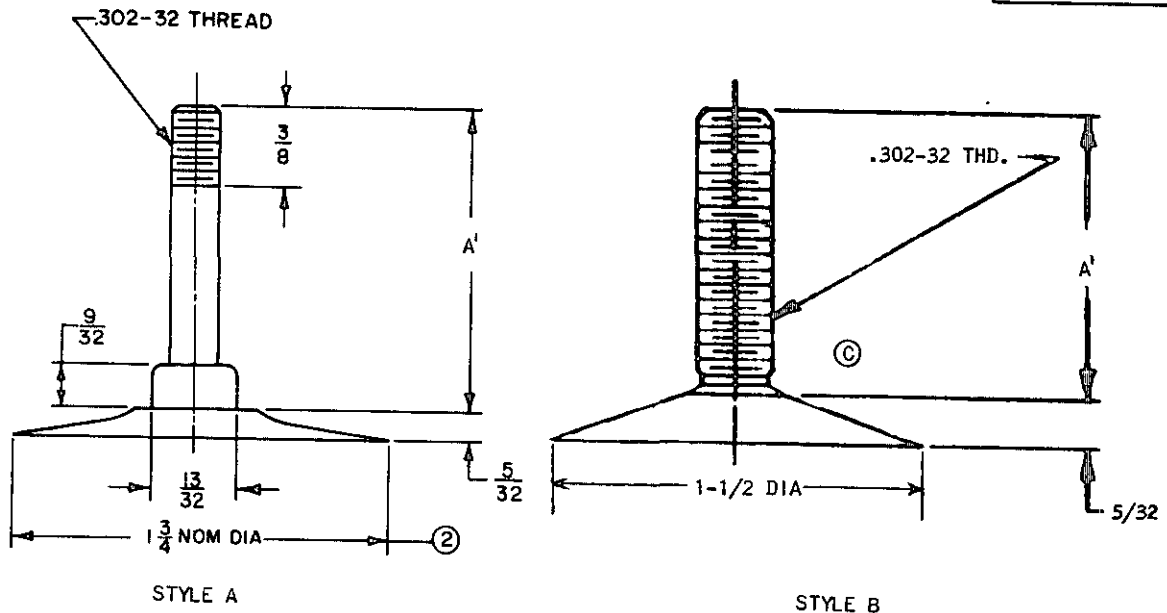


FED. SUP CLASS  
2640

MS PART NO.	TR IDENT NO.	STYLE	DIMENSION A'
MS 51360-1	TR-87	A	1-3/4
MS 51360-2	TR-87S	A	31/32
MS 51360-3	TR-4	B	1-5/32

TYPE I, CLASS 4-OF PROCUREMENT SPECIFICATION

TR DENOTES TIRE AND RIM ASSOCIATION

## NOTES:

1. VALVE CORE, MS51377 AND VALVE CAP, MS51375 ARE INCLUDED AS PART OF THIS ASSEMBLY.
2. BASE CONFIGURATION OPTIONAL, FOR STYLE A, PROVIDED CIRCULAR BASE AREA AT VALVE AXIS IS 1-3/4 INCHES NOMINAL DIAMETER.
3. DIMENSIONS SHOWN ARE IN INCHES.
4. THIS STANDARD IS NOT INTENDED TO LIMIT CONSTRUCTION TO FEATURES OTHER THAN AS SHOWN HEREON BY DIMENSIONS, NOTATIONS AND REFERENCED DOCUMENTS.
5. FOR DESIGN FEATURE PURPOSES, THIS STANDARD TAKES PRECEDENCE OVER PROCUREMENT DOCUMENTS REFERENCED HEREIN.
6. REFERENCED DOCUMENTS SHALL BE OF THE ISSUE IN EFFECT ON DATE OF INVITATIONS FOR BID.
7. MARKING SHALL CONSIST OF THE MS PART NUMBER, T&R IDENTIFICATION NUMBER, AND MANUFACTURER'S IDENTIFICATION, IN ACCORDANCE WITH MIL-STD-130 OR MIL-STD-129.

D

CANCELLED

AFTER 25 MAY 1976

FOR NEW DESIGN AND PROCUREMENT USE TIRE AND RIM ASSOCIATION STANDARD YEARBOOK PER ZZ-V-25

P.A. ARMY-AT

Other Cust

NAVY-YD

AF-84

PROCUREMENT SPECIFICATION  
ZZ-V-25

TITLE

VALVE, PNEUMATIC TIRE, INNER TUBE:  
RUBBER BASE, METAL STEM, STD. BORE,  
STRAIGHT, VEHICULAR

SUPERSEDES:

MILITARY STANDARD

MS51360

SHEET 1 OF 1

DD FORM 672-1 (Coordinated)

PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE.

2640-0159

This military standard is mandatory for use by all Departments and Agencies of the Department of Defense. Selection for all new engineering and design applications and for repetitive use shall be made from this document.

APPROVED 23 MARCH 1961 REVISED (A) 28 JUNE 1963 (B) 12 APRIL 1967 (C) 1 JULY 1971 (D) 25 MAY 1976

USER ACTIVITIES: ARMY-MI, ME