


USER ACTIVITIES: ARMY-MI, ME; NAVY-MC

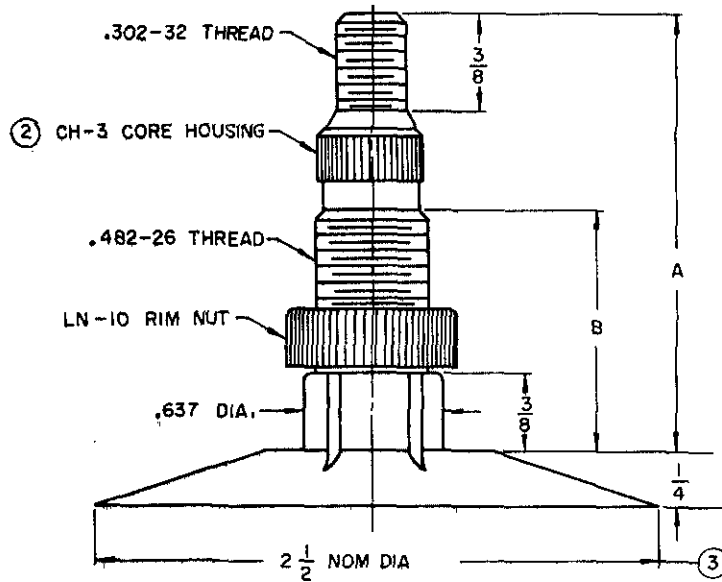

TYPE I, CLASS B - OF PROCUREMENT SPECIFICATION

MS PART NO.	TR IDENT NO.	DIMENSIONS	
		A	B
MS 51364-1	TR-218A	1-5/8	13/16
MS 51364-2	TR-220A	1-61/64	1-9/64

TR DENOTES TIRE AND RIM ASSOCIATION

③ **CANCELLED**

AFTER 21 NOVEMBER 1975

FOR NEW DESIGN AND PROCUREMENT USE TIRE AND RIM ASSOCIATION STANDARDS YEAR BOOK AS SPECIFIED IN ZZ-V-25

NOTES:

1. VALVE CORE, MS51377 AND VALVE CAP, MS51375 ARE INCLUDED AS PART OF THIS ASSEMBLY.
2. FITTING PART NUMBER DESIGNATIONS REFER TO TR IDENTIFICATION.
3. BASE CONFIGURATION OPTIONAL PROVIDED CIRCULAR BASE AREA AT VALVE AXIS IS 2-1/2 INCHES NOMINAL DIAMETER.
4. DIMENSIONS SHOWN ARE IN INCHES.
5. THIS STANDARD IS NOT INTENDED TO LIMIT CONSTRUCTION TO FEATURES OTHER THAN AS SHOWN HEREON BY DIMENSIONS, NOTATIONS AND REFERENCED DOCUMENTS.
6. FOR DESIGN FEATURE PURPOSES, THIS STANDARD TAKES PRECEDENCE OVER PROCUREMENT DOCUMENTS REFERENCED HEREIN.
7. REFERENCED DOCUMENTS SHALL BE OF THE ISSUE IN EFFECT ON DATE OF INVITATIONS FOR BID.
8. MARKING SHALL CONSIST OF THE MS PART NUMBER, T & R IDENTIFICATION NUMBER, AND MANUFACTURER'S IDENTIFICATION, IN ACCORDANCE WITH MIL-STD-130. OR MIL-STD-129.

P.A. ARMY-AT Other Cust NAVY-YD AF- B4	TITLE VALVE, PNEUMATIC TIRE, INNER TUBE: AIR-WATER, RUBBER BASE, METAL STEM, STD. BORE, STRAIGHT, VEHICULAR	MILITARY STANDARD MS51364
PROCUREMENT SPECIFICATION ZZ-V-25	SUPERSEDES:	SHEET 1 OF 1