


USER ACTIVITIES: ARMY-MI, M"

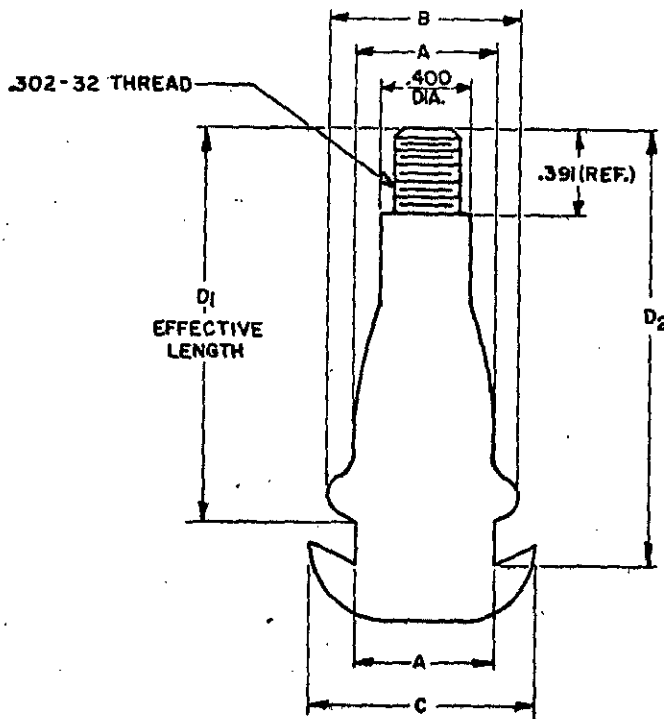

TYPE II, CLASS I-OF PROCUREMENT SPECIFICATION

© CANCELLED

AFTER 23 DEC. 1975

FOR NEW DESIGN AND PROCUREMENT USE TIRE AND RIM ASSOCIATION
STANDARDS YEARBOOK PER ZZ-V-25

MS PART NO.	TR IDENT NO.	RIM HOLE DIA.	A	B MAX	C MAX	D ₁	D ₂
MS51367-1	TR-413	.453	.600	.660	.781	1-1/4	1-3/8
MS51367-2	TR-414	.453	.600	.660	.781	1-1/2	1-5/8
MS51367-3	TR-415	.625	.768	.820	1.000	1-1/4	1-3/8
MS51367-4	TR-418	.453	.600	.660	.781	2	2-1/8
MS51367-5	TR-423	.453	.600	.660	.781	2-1/2	2-5/8
MS51367-6	TR-425	.625	.768	.820	1.000	2	2-1/8
MS51367-7	TR-420	.625	.768	.820	1.000	1-3/4	1-7/8

TR DENOTES TIRE AND RIM ASSOCIATION

NOTES:

1. VALVE CORE, MS51377 AND VALVE CAP, MS51375 ARE INCLUDED AS PART OF THIS ASSEMBLY.
2. DIMENSIONS SHOWN ARE IN INCHES.
3. THIS STANDARD IS NOT INTENDED TO LIMIT CONSTRUCTION TO FEATURES OTHER THAN AS SHOWN HEREON BY DIMENSIONS, NOTATIONS AND REFERENCED DOCUMENTS.
4. FOR DESIGN FEATURE PURPOSES, THIS STANDARD TAKES PRECEDENCE OVER PROCUREMENT DOCUMENTS REFERENCED HEREIN.
5. REFERENCED DOCUMENTS SHALL BE OF THE ISSUE IN EFFECT ON DATE OF INVITATIONS FOR BID.
6. MARKING SHALL CONSIST OF THE MS PART NUMBER, T & R IDENTIFICATION NUMBER, AND MANUFACTURER'S IDENTIFICATION, IN ACCORDANCE WITH MIL-STD-130 OR MIL-STD-129.

(B) ENTIRE STANDARD REVISED

P.A. ARMY-AT Other Cost NAVY-YD AF-84	TITLE VALVE, PNEUMATIC TIRE: TUBELESS, SNAP-IN, STD. BORE, STRAIGHT, VEHICULAR	MILITARY STANDARD MS51367
PROCUREMENT SPECIFICATION ZZ-V-25	SUPERSEDES:	SHEET 1 OF 1