


FED. SUP CLASS
2640

USER ACTIVITIES: ARMY-MI, ME

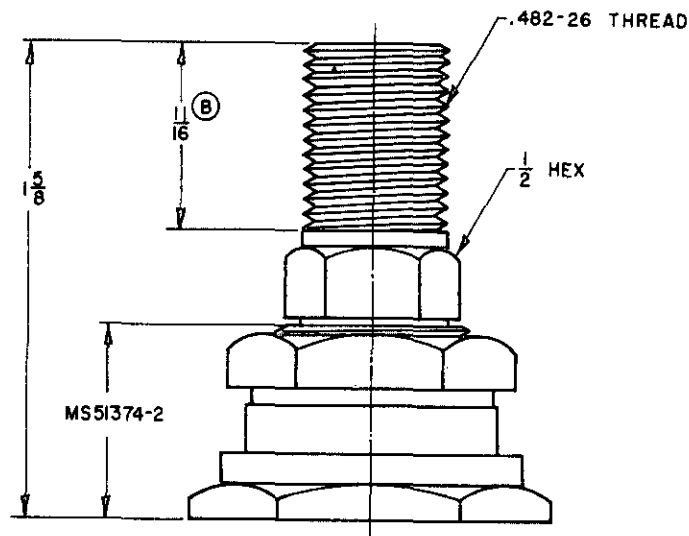

TYPE II, CLASS 4-OF PROCUREMENT SPECIFICATION

NOTES:

1. MS51378 VALVE CORE AND MS51376 VALVE CAP ARE INCLUDED AS PART OF THIS ASSEMBLY.
2. DIMENSIONS SHOWN ARE IN INCHES.
3. THIS STANDARD IS NOT INTENDED TO LIMIT CONSTRUCTION TO FEATURES OTHER THAN AS SHOWN HEREON BY DIMENSIONS, NOTATIONS AND REFERENCED DOCUMENTS.
4. FOR DESIGN FEATURE PURPOSES, THIS STANDARD TAKES PRECEDENCE OVER PROCUREMENT DOCUMENTS REFERENCED HEREIN.
5. REFERENCED DOCUMENTS SHALL BE OF THE ISSUE IN EFFECT ON DATE OF INVITATION FOR BID.
6. MARKING SHALL CONSIST OF THE MS PART NUMBER, T&R IDENTIFICATION NUMBER, AND MANUFACTURER'S IDENTIFICATION IN ACCORDANCE WITH MIL-STD-129 OR MIL-STD-130.

© CANCELLED

AFTER 25 MAY 1976

FOR NEW DESIGN AND PROCUREMENT USE TIRE AND RIM ASSOCIATION STANDARD YEARBOOK PER ZZ-V-25

TR DENOTES TIRE AND RIM ASSOCIATION

MS PART NO.	TR IDENT NO.
MS 51370-1	TR-J-670

P.A. ARMY-AT Other Cust NAVY-YD AF-84	TITLE VALVE, PNEUMATIC TIRE; AIR-WATER, TUBELESS, CLAMP-IN, OFF-THE-ROAD, LARGE BORE, STRAIGHT, VEHICULAR	MILITARY STANDARD MS51370
PROCUREMENT SPECIFICATION ZZ-V-25	SUPERSEDES:	SHEET 1 OF 1

DD FORM 1 SEP 57 672-1 (COORDINATED)

*PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE.

2640-0160

This military standard is mandatory for use by all Departments and Agencies of the Department of Defense. Selection for all new engineering and design applications and for repetitive use shall be made from this document.

APPROVED 23 MARCH 1961 REVISED (A) 28 JUNE 1963 (B) 12 APRIL 1967 (C) 25 MAY 1976