
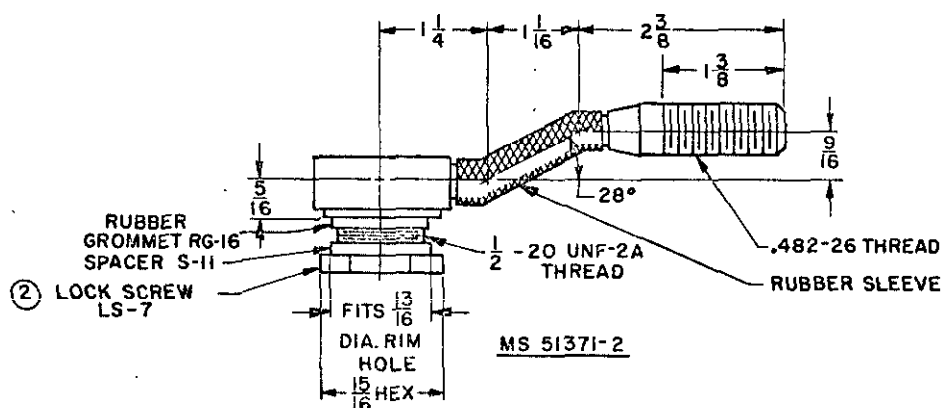


USER ACTIVITIES: ARMY-MI, ME

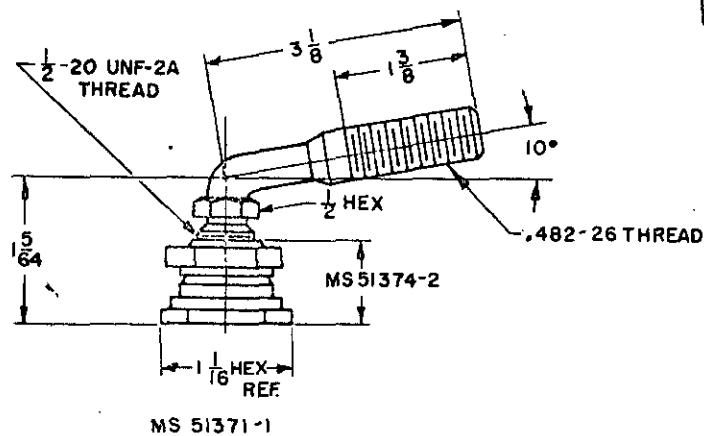

TYPE II, CLASS 5-OF PROCUREMENT SPECIFICATION

MS PART NO.	TR IDENT NO.
MS 51371 -1	TR-J-650
MS 51371 -2	TR-J-690

TR DENOTES TIRE AND RIM ASSOCIATION

NOTES :

1. MS51378 VALVE CORE AND MS51376 VALVE CAP ARE INCLUDED AS PART OF THIS ASSEMBLY.
2. FITTING PART NUMBER DESIGNATIONS REFER TO TR IDENTIFICATION.
3. DIMENSIONS SHOWN ARE IN INCHES.
4. THIS STANDARD IS NOT INTENDED TO LIMIT CONSTRUCTION TO FEATURES OTHER THAN AS SHOWN HEREON BY DIMENSIONS, NOTATIONS AND REFERENCED DOCUMENTS.
5. FOR DESIGN FEATURE PURPOSES, THIS STANDARD TAKES PRECEDENCE OVER PROCUREMENT DOCUMENTS REFERENCED HEREIN.
6. REFERENCED DOCUMENTS SHALL BE OF THE ISSUE IN EFFECT ON DATE OF INVITATION FOR BID.
7. MARKING SHALL CONSIST OF THE MS PART NUMBER, TR IDENTIFICATION NUMBER, AND MANUFACTURER'S IDENTIFICATION IN ACCORDANCE WITH MIL-STD-129 OR MIL-STD-130.

© CANCELLED AFTER 21 JANUARY 1976

FOR NEW DESIGN AND PROCUREMENT USE TIRE AND RIM ASSOCIATION STANDARDS YEAR BOOK AS SPECIFIED IN ZZ-V-25

P.A. ARMY-AT Other Cust NAVY-YD AF-84	TITLE VALVE, PNEUMATIC TIRE: AIR-WATER, TUBELESS, CLAMP-IN, OFF-THE-ROAD, LARGE BORE, BENT, VEHICULAR	MILITARY STANDARD
		MS51371
PROCUREMENT SPECIFICATION ZZ-V-25	SUPERSEDES:	SHEET 1 OF 1

2640-0142

APPROVED 23 MARCH 1961 REVISED (A) 28 JUNE 1963 (B) 12 APRIL 1967 (C) 21 JANUARY 1976

This military standard is mandatory for use by all Departments and Agencies of the Department of Defense. Selection for all new engineering and design applications and for repetitive use shall be made from this document.