


FED. SUP CLASS
2640

USER ACTIVITIES: ARMY-MI, ME

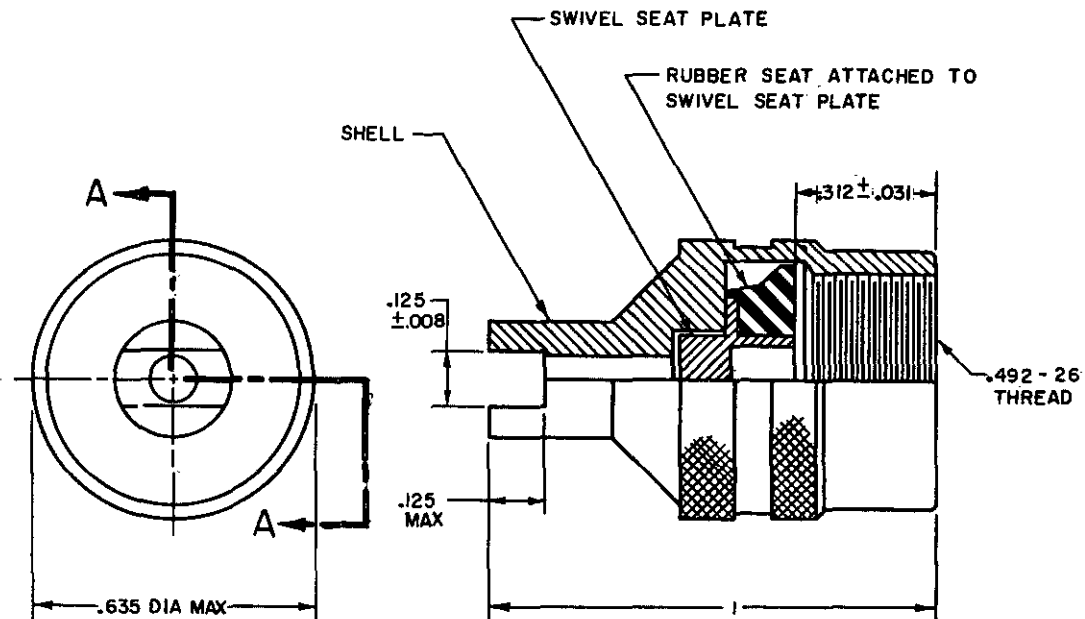

SECTION AA

TYPE IV, CLASS 2-OF PROCUREMENT SPECIFICATION

TR DENOTES TIRE AND RIM ASSOCIATION

NOTES:

1. FINISH - CHEMICAL BLACK, SPECIFICATION MIL-F-495 WHERE PRACTICAL.
2. REMOVE SHARP EDGES.
3. DIMENSIONS SHOWN ARE IN INCHES.
4. THIS STANDARD IS NOT INTENDED TO LIMIT CONSTRUCTION TO FEATURES OTHER THAN AS SHOWN HEREON BY DIMENSIONS, NOTATIONS AND REFERENCED DOCUMENTS.
5. FOR DESIGN FEATURE PURPOSES, THIS STANDARD TAKES PRECEDENCE OVER PROCUREMENT DOCUMENTS REFERENCED HEREIN.
6. REFERENCED DOCUMENTS SHALL BE OF THE ISSUE IN EFFECT ON DATE OF INVITATIONS FOR BID.
7. MARKING SHALL CONSIST OF THE MS PART NUMBER, T & R IDENTIFICATION NUMBER, AND MANUFACTURER'S IDENTIFICATION, IN ACCORDANCE WITH MIL-STD-130 OR MIL-STD-129.

© CANCELLED AFTER 25 MARCH 1977
FOR NEW DESIGN AND PROCUREMENT USE TIRE AND RIM
ASSOCIATION STANDARDS YEARBOOK PER ZZ-V-25

(B)

MS PART NO.	TR IDENT NO.
MS51376-1	TR-VC-6

P.A. ARMY-AT
 Other Cust
 NAVY-YD
 AF-84

TITLE

CAP, TIRE VALVE:-LARGE BORE

MILITARY STANDARD

MS51376

PROCUREMENT SPECIFICATION
 ZZ-V-25

SUPERSEDES:

SHEET 1 OF 1