

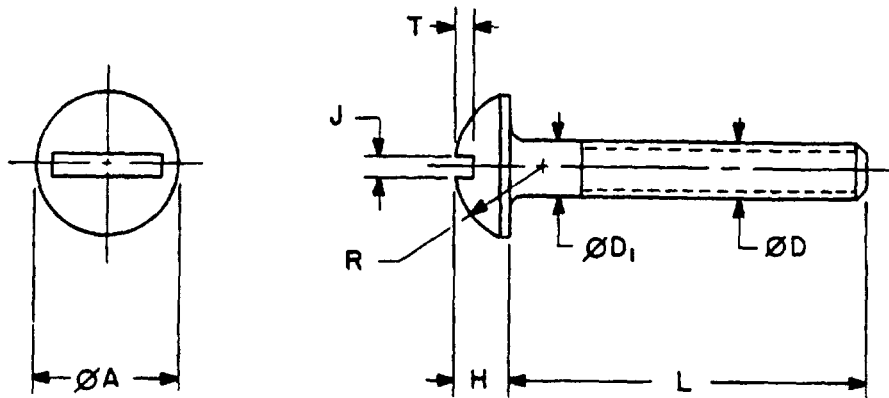
FED SUP CLASS
5305

TABLE 1. DASH NUMBERS AND DIMENSIONS

Ø D NOMINAL SIZE		#6 .1380	#8 .1640					#10 .1900	
THREADS PER INCH		32 UNC-2A	32 UNC-2A					32 UNF-2A	
Ø D ₂ BODY	MAX MIN	.1380 .1341	.1640 .1399	.1640 .1399	.1640 .1399	.1640 .1399	.1640 .1399	.1900 .1658	.1900 .1658
Ø A HEAD	MAX MIN	.321 .303	.384 .364	.384 .364	.406 .386	.422 .408	.384 .364	.448 .425	.448 .425
H HEAD HEIGHT	MAX MIN	.086 .076	.102 .092	.085 .075	.081 .071	.085 .075	.102 .092	.118 .103	.125 .110
R HEAD RADIUS	MAX	.251	.254	.254	.346	.254	.254	.283	.283
J SLOT WIDTH	MAX MIN	.048 .039	.054 .045	.054 .045	.054 .045	.054 .045	.054 .045	.060 .050	.060 .050
T SLOT DEPTH	MAX MIN	.050 .037	.050 .037	.040 .027	.040 .027	.050 .037	.058 .045	.068 .053	.068 .053
L LENGTH	TOLERANCE	DASH NUMBER	DASH NUMBER	DASH NUMBER	DASH NUMBER	DASH NUMBER	DASH NUMBER	DASH NUMBER	DASH NUMBER
.125			2						
.140			6						
.156			7						
.172			8						
.187			9						
.218			11						
.234				12					
.250			13						
.281			14						
.296				15					
.312			16						
.344			18						
.375			19						
.406			20						
.438			21						
.500			22						
.562			23						
.625									
	+0 -.031	1						4	
									5
							24		

(A) ENTIRE STANDARD REVISED

PA ARMY-AR Other Cust NAVY-EC	INTERNATIONAL INTEREST	TITLE SCREW, MACHINE, BOOM SUPPORT ASSEMBLY	MILITARY STANDARD MS51475
PROCUREMENT SPECIFICATION FF-S-92	SUPERSEDES	PAGE 1	OF 2

DD FORM 672-1 (COORDINATED)

PREVIOUS EDITIONS ARE OBSOLETE

5305-1703

USER ACTIVITIES
NAVY-MCREVIEWER ACTIVITIES
ARMY-CR
DLA-IS

DISTRIBUTION STATEMENT A Approved for public release; distribution is unlimited

This military standard is approved for use by all Departments and Agencies of the Department of Defense

Selection for all new engineering and design applications and for repetitive use shall be made from this document when applicable

AMSC N/A

APPROVED 10 JUN 83
REVISED (A) 27 SEPT 88

FED SUP CLASS
5305

REQUIREMENTS:

1. MATERIAL: STEEL, CORROSION RESISTANT, TYPE 300 SERIES, IN ACCORDANCE WITH PROCUREMENT SPECIFICATION BRASS, IN ACCORDANCE WITH QQ-B-613, QQ-B-626, OR QQ-W-321.
2. CLEANED, DESCALED AND PASSIVATED: CORROSION RESISTANT STEEL SCREWS SHALL BE CLEANED, DESCALED, AND PASSIVATED IN ACCORDANCE WITH QQ-P-35, TYP. I.
3. PROTECTIVE COATING AND SURFACE TREATMENT: WHEN REQUIRED, CORROSION RESISTANT STEEL SCREWS SHALL BE BLACK OXIDE COATED IN ACCORDANCE WITH PROCUREMENT SPECIFICATION. BRASS SCREWS SHALL HAVE BLACK CHEMICAL FINISH IN ACCORDANCE WITH MIL-P-495, NICKEL PLATING IN ACCORDANCE WITH QQ-N-290, GRADE E, OR NO PROTECTIVE COATING
4. MAGNETIC PERMEABILITY: CORROSION RESISTANT STEEL SCREWS SHALL MEET THE MAGNETIC PERMEABILITY REQUIREMENTS OF THE PROCUREMENT SPECIFICATION.
5. THREADS: THREADS SHALL BE IN ACCORDANCE WITH FED-STD-H28/2. ACCEPTABILITY OF SCREW THREADS SHALL BE IN ACCORDANCE WITH FED-STD-H28/20, SYSTEM 21.
6. THREAD LENGTH: SCREWS SHALL BE THREADED TO WITHIN A DISTANCE OF NOT LESS THAN TWO THREADS OF THE BEARING SURFACE OF THE HEAD.
7. PART NUMBER: THE PART NUMBER SHALL CONSIST OF THE BASIC MS NUMBER FOLLOWED BY A DASH NUMBER TAKEN FROM TABLE I, FOLLOWED BY A MATERIAL CODE LETTER AND A FINISH CODE LETTER IF APPLICABLE

EXAMPLE: MS51475-4B

FINISH CODE:

FOR CORROSION RESISTANT STEEL: "B" BLACK OXIDE COATING
NO CODE - CLEANED, DESCALED AND PASSIVATED

FOR BRASS:

"C" - BLACK CHEMICAL FINISH

"N" - NICKEL PLATING

NO CODE - NO PROTECTIVE COATING OR SURFACE TREATMENT

DASH NUMBER

MATERIAL CODE:

"S" - CORROSION-RESISTANT STEEL

"B" - BRASS

BASIC MS NUMBER

MS51475-4B INDICATES - SCREW, MACHINE, BOOM SUPPORT ASSEMBLY, .1900-32 UNF-2A; .250 LENGTH, CORROSION RESISTANT STEEL

MS51475B4 INDICATES - SCREW, MACHINE, BOOM SUPPORT ASSEMBLY; .1900-32 UNF-2A, .250 LENGTH, BRASS; NO PROTECTIVE COATING OR SURFACE TREATMENT

NOTES:

1. ALL DIMENSIONS ARE IN INCHES.
2. IN THE EVENT OF A CONFLICT BETWEEN THE TEXT OF THIS STANDARD AND THE REFERENCES CITED HEREIN, THE TEXT OF THIS STANDARD SHALL TAKE PRECEDENCE.
3. REFERENCED GOVERNMENT (OR NON-GOVERNMENT) DOCUMENTS OF THE ISSUE LISTED IN THAT ISSUE OF THE DEPARTMENT OF DEFENSE INDEX OF SPECIFICATIONS AND STANDARDS (DODISS) SPECIFIED IN THE SOLICITATION FORM A PART OF THIS STANDARD TO THE EXTENT SPECIFIED HEREIN.

P A ARMY - AR Other Cust NAVY - EC	INTERNATIONAL INTEREST	TITLE SCREW, MACHINE, BOOM SUPPORT ASSEMBLY	MILITARY STANDARD
			MS51475
PROCUREMENT SPECIFICATION FF-S-92	SUPERSEDES	PAGE 2	OF 2

DD FORM 672-1 (COORDINATED)

PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE

5305-1703

DISTRIBUTION STATEMENT A Approved for public release; distribution is unlimited
This military standard is approved for use by all Departments and Agencies of the Department of Defense
Selection for all new engineering and design applications and for repetitive use shall be made from this document when applicable

AMSC N/A

USER ACTIVITIES
NAVY - MCREVIEWER ACTIVITIES
ARMY - CR
DLA - IS

1ND 2

FOR CHANGES SEE PAGES

A

REVISED

APPROVED 10 JUN 83