


FED. SUP CLASS  
5940

USER ACTIVITIES:  
NAVY - A.S.MC  
AIR FORCE - II

REVIEWER ACTIVITIES:  
ARMY - MI AV  
AIR FORCE - 99  
DSC - GS

DISTRIBUTION STATEMENT A: APPROVED FOR PUBLIC RELEASE; DISTRIBUTION IS UNLIMITED.

This military standard is approved for use by all Departments and Agencies of the Department of Defense. Selection for all new requirements and design applications and for repetitive use shall be made from this document, when applicable.

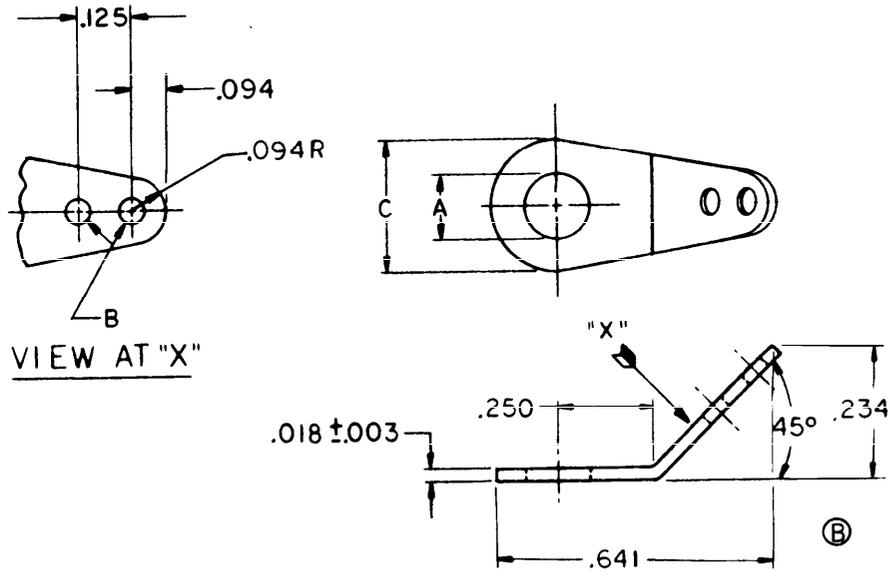

DASH NO	WIRE SIZE AWG NOM	STUD SIZE	HOLE A DIA		B DIA	C DIA
			MIN	MAX		
1	12	2	.090	.096	.094	.312
2		4	.115	.127		
3		6	.141	.153		
4		8	.167	.179		
5		10	.193	.205		

ⓑ

MATERIAL: Copper, annealed - Specification QQ-C-576.

FINISH: Hot tin dip or electroplated tin all over, minimum thickness .0005 inches.

NOTES:

- Dimensions are in inches
- Unless otherwise specified, tolerance is  $\pm .015$ .
- Remove all burrs.
- The MS part number consists of the MS number plus the dash number.
- In the event of a conflict between the text of this standard and the references cited herein, the text of this standard shall take precedence.
- Referenced Government (or nongovernment) documents of the issue listed in that issue of the Department of Defense Index of Specifications and Standards (DODISS) specified in the solicitation form a part of this standard to the extent specified herein.

ⓑ DENOTES CHANGES

APPROVED 6 FEB 1985 REVISED ⓐ 5 SEPT 1985 ⓑ 9 JUNE 1986

P. A. Other Cost	AR 85	INTERNATIONAL INTEREST	TITLE TERMINAL LUG, SOLDER TYPE, COPPER STAMPING, TWO HOLE, 45°	MILITARY STANDARD MS 51536
PROCUREMENT SPECIFICATION MIL-T-15659	SUPERSEDES:		PAGE	OF