


FED. SUP CLASS
5940USER ACTIVITIES: NAVY - AS, MC
AIR FORCE - IIREVIEWER ACTIVITIES: ARMY - MI, AV
AIR FORCE - 99
DSC - GS

DISTRIBUTION STATEMENT A: APPROVED FOR PUBLIC RELEASE; DISTRIBUTION IS UNLIMITED.

This military standard is approved for use by all Departments and Agencies of the Department of Defense. Selection for all new engineering and design applications and for repetitive use shall be made from this document, when applicable.

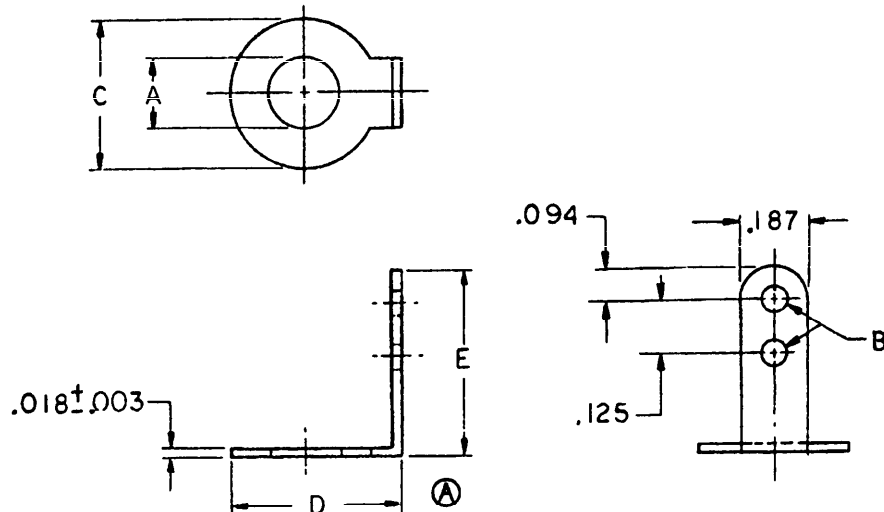

DASH NO	WIRE SIZE AWG NON	STUD SIZE	A HOLE DIA		B DIA	C DIA	D	E
			MIN	MAX				
1	12	2	.090	.096	.094	.312	.312	.437
2		4	.115	.127				
3		6	.141	.153				
4		8	.167	.179				
5		10	.193	.205				
6	10	.250	.253	.257	.130	.375	.375	.500
7		.315	.318	.322		.469	.469	.593

MATERIAL: Copper, annealed - specification QQ-C-576.

FINISH: Hot tin dip or electroplated tin all over, minimum thickness .0005 inches.

NOTES:

- Dimensions are in inches.
- Unless otherwise specified, tolerance is $\pm .015$.
- Remove all burrs.
- The MS part number consists of the MS number plus the dash number.
- In the event of a conflict between the text of this standard and the references cited herein, the text of this standard shall take precedence.
- Referenced Government (or nongovernment) documents of the issue listed in that issue of the Department of Defense Index of Specifications and Standards (DoDISS) specified in the solicitation form a part of this standard to the extent specified herein.

ⓑ CANCELLED FOR PROCUREMENT USE MS51560

Ⓐ DENOTES CHANGES

P. A. Other Cust	AR 85	INTERNATIONAL INTEREST	TITLE TERMINAL LUG, SOLDER TYPE, COPPER STAMPING, TWO HOLE, 90°	MILITARY STANDARD MS 51537
PROCUREMENT SPECIFICATION MIL-T-15659		SUPERSEDES:		PAGE 1 OF 1