

FED SUP CLAS
3340

USAR ACTIVITIES
ARMY - ME
NAVY - AS, MC, OS, YO

REVIEWER ACTIVITIES
ARMY - CR
AIR FORCE - 02
DLA - IS

DISTRIBUTION STATEMENT A. Approved for public release; distribution is unlimited. This military standard is approved for use by all Departments and Agencies of the Department of Defense. Referral for all new engineering and design applications and for repetitive use shall be made from this document when applicable.

AMSC N/A

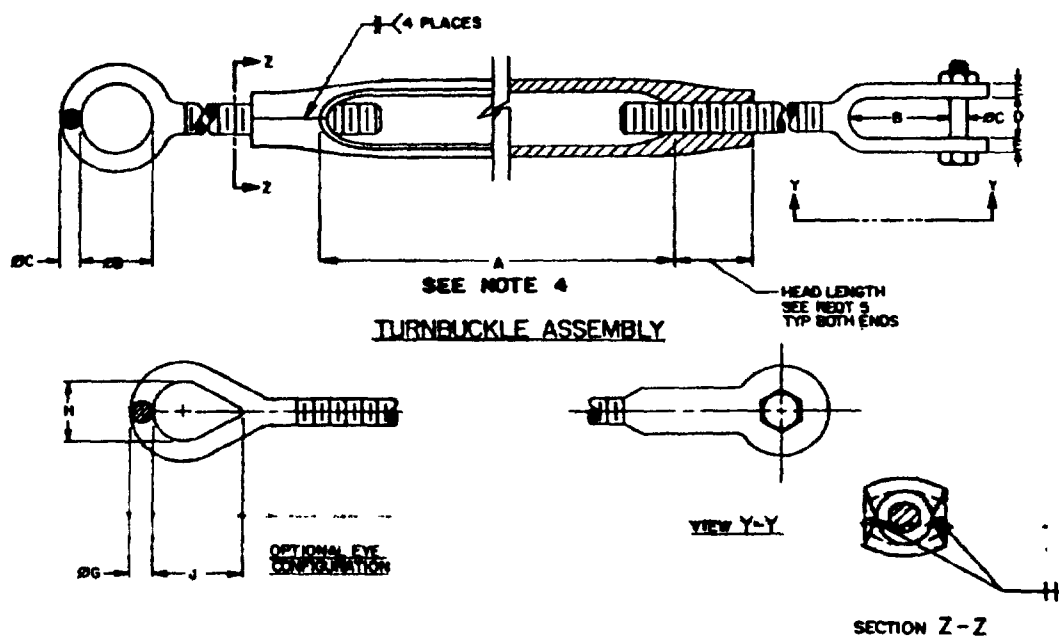


TABLE I. DIMENSIONS AND DASH NUMBERS

DASH NUMBER	NOMINAL THREAD SIZE	A INCH	JAW				EYE			
			H INCH	Ø C INCH	D INCH	E INCH	Ø F INCH	Ø G INCH	H INCH	J INCH
1	.250-20	4	.625	.250	.375	.125	.300	.218	.344	.687
2	.3125-18	4.5	.719	.250	.468	.125	.625	.281	.437	.812
3	.375-16	6	.812	.312	.500	.187	.750	.344	.531	.937
4	.500-13	6	1.032	.375	.625	.250	1.000	.437	.718	1.187
5		9								
6		12								
7	.625-11	6	1.250	.500	.750	.312	1.250	.500	.875	1.375
8		9								
9		12								
10		18								
11	.750-10	6	1.500	.625	.937	.375	1.500	.625	1.000	1.625
13		9								
14		12								
15		24								
16	.875-9	12	1.750	.750	1.125	.437	1.750	.750	1.250	1.875
17		18								
18		24								
19	1.000-8	12	2.000	.875	1.187	.500	2.000	.875	1.437	2.250
20		18								
21		24								
22		36								

APPROVED	REVISD

PA ARMY - AR Other Cost NAVY - SH AIR FORCE-99	INTERNATIONAL INTEREST	TITLE TURNBUCKLE, FLAT BODY, JAW AND EYE (TYPE I, FORM I, CLASS 8)	MILITARY STANDARD MS51572
PROCUREMENT SPECIFICATION FF-T-791	SUPERSEDES	PAGE 1 OF 3	

DD FORM 672-1 (COORDINATED)
1 MAY 72

PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE

5340-1812

USER ACTIVITIES
ARMY - ME
NAVY - AS, MC, OS, YD


REVIEWER ACTIVITIES
ARMY - CR
AIR FORCE - 82
DLA - IS

This military standard is approved for use by all Departments and Agencies of the Department of Defense.
Selection for all new engineering and design applications and for repetitive use shall be made from this document when applicable.

TABLE 1 DIMENSIONS AND DASH NUMBERS - CONTINUED										
DASH NUMBER	NOMINAL THREAD SIZE	A MIN	JAW			EYE				
			B MIN	ØC MIN	D MIN	E MIN	ØF MIN	ØG MIN	H MIN	J MIN
23 24 25 26	1.250-7	12 18 24 36	2.375	1.125	1.750	.625	2.125	1.062	1.687	2.562
27 28 29 30 31	1.500-6	12 18 24 36 48	2.750	1.375	2.062	.687	2.250	1.250	2.125	3.250
32 33 34 35	1.750-5	18 24 36 48	3.000	1.625	2.375	.750	2.500	1.437	2.375	3.750
36 37 38	2.000-4.5	24 36 48	3.750	1.875	2.500	.812	3.000	1.625	2.687	4.375
39 40 41	2.250-4.5	24 36 48	4.000	2.062	2.625	.875	3.250	1.812	2.937	5.187
42 43 44	2.500-4	24 36 48	4.250	2.250	2.875	1.000	3.500	2.000	3.125	6.000

REQUIREMENTS:

- MATERIAL:** TURNBUCKLE BODY AND END PULLS SHALL BE MANUFACTURED FROM STEEL OF A COMPOSITION CAPABLE OF WITHSTANDING THE SPECIFIED BREAKING STRENGTH IN THE PROCUREMENT SPECIFICATION.
- FABRICATION METHOD:** THE TURNBUCKLE BODY AND END PULLS SHALL BE HOT FORGED.
- FINISH:**
 RUST INHIBITOR - TURNBUCKLE BODY AND END PULLS SHALL BE TREATED WITH RUST INHIBITOR IN ACCORDANCE WITH MIL-C-85054 OR EQUIVALENT.
 ZINC COATING - TURNBUCKLE BODY AND END PULLS SHALL BE ZINC COATED AS SPECIFIED IN PROCUREMENT SPECIFICATION, ASTM B633, TYPE II, Fe/Zn 13.
- THREADS:** ONE END PULL AND THE CORRESPONDING HEAD BODY SHALL HAVE RIGHT HAND THREAD AND THE OTHER LEFT HAND. THE THREAD SHALL BE MACHINED AFTER FABRICATION OF END PULL AND THE HEAD BODY.
- LENGTH OF HEAD:** THE LENGTH OF THE HEAD OF THE TURNBUCKLE BODY SHALL BE NOT LESS THAN 1 1/2 TIMES THE NOMINAL THREAD SIZE FOR SIZES UP TO 1.250, AND 1 1/4 TIMES FOR SIZES GREATER THAN 1.250 NOMINAL THREAD SIZE.
- BREAKING STRENGTH:** THE BREAKING STRENGTH OF THE TURNBUCKLE SHALL BE NOT LESS THAN THE VALUE SPECIFIED IN THE PROCUREMENT SPECIFICATION FOR TYPE 1, FORM 1, WITH JAW AND EYE END PULLS.
- BENDING STRENGTH:** THE BENDING STRENGTH SHALL BE AS SPECIFIED IN THE PROCUREMENT SPECIFICATION.
- LENGTH OF THREAD:** THE LENGTH OF THE THREAD ON THE END PULLS SHALL BE GREAT ENOUGH SO THAT THE ENDS OF THE END PULLS CAN BE BROUGHT INTO CONTACT WITH EACH OTHER AT THE MIDDLE OF THE BODY LENGTH.
- PART NUMBER:** THE PART NUMBER SHALL CONSIST OF THE BASIC NS NUMBER, FOLLOWED BY A DASH NUMBER FROM TABLE 1 AND THE FINISH CODE BELOW:
FINISH CODE:
 F - RUST INHIBITOR TREATMENT
 Z - ZINC COATED
 EXAMPLE MS51572-7Z
 MS51572-7Z INDICATES: TURNBUCKLE FLAT BODY, JAW AND EYE END PULLS; .625-11 THREAD; 6-INCH CLEAR OPENING BETWEEN HEADS; ZINC COATED

PA ARMY - AR Other Govt NAVY - SH AIR FORCE-99	INTERNATIONAL INTEREST	TITLE  TURNBUCKLE, FLAT BODY JAW AND EYE (TYPE 1, FORM 1, CLASS 8)	MILITARY STANDARD MS51572
PROCUREMENT SPECIFICATION FF-T-791	SUPERSEDES	PAGE 2	OF 3

APPROVED 16 FEB 1988
REVISED

FED. SUP. CLASS
5340

NOTES:

1. ALL DIMENSIONS ARE IN INCHES. TOLERANCES SHALL BE IN ACCORDANCE WITH STANDARD MANUFACTURING PRACTICES FOR TURNBUCKLES.
2. IN THE EVENT OF A CONFLICT BETWEEN THE TEXT OF THIS STANDARD AND THE REFERENCES CITED HEREIN, THE TEXT OF THIS STANDARD SHALL TAKE PRECEDENCE.
3. REFERENCED GOVERNMENT (OR NON-GOVERNMENT) DOCUMENTS OF THE ISSUE LISTED IN THAT ISSUE OF THE DEPARTMENT OF DEFENSE INDEX OF SPECIFICATIONS AND STANDARDS (DODISS) SPECIFIED IN THE SOLICITATION FORM A PART OF THIS STANDARD TO THE EXTENT SPECIFIED HEREIN.
4. DIMENSION "A" IS THE THICK OF LENGTH OR CLEAR OPENING OF THE BODY.

USER ACTIVITIES:
ARMY - ME
NAVY - AS, MC, OS, YO

REVIEWER ACTIVITIES:
ARMY - CR
AIR FORCE - 82
DLA - IS

This military standard is approved for use by all Departments and Agencies of the Department of Defense. Selection for all new engineering and design applications and for repetitive use shall be made from this document when applicable.

APPROVED 16 FEB 1988
REVISED

P A ARMY-AR NAVY-SH AIR FORCE-99	INTERNATIONAL INTEREST	TITLE TURNBUCKLE, FLAT BODY, JAW AND EYE (TYPE I, FORM I, CLASS 8)	MILITARY STANDARD MS51572
PROCUREMENT SPECIFICATION FF-T-791	SUPERSEDES	PAGE 3 OF 3	

DD FORM 672-1 (COORDINATED)

PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE

5340-1812