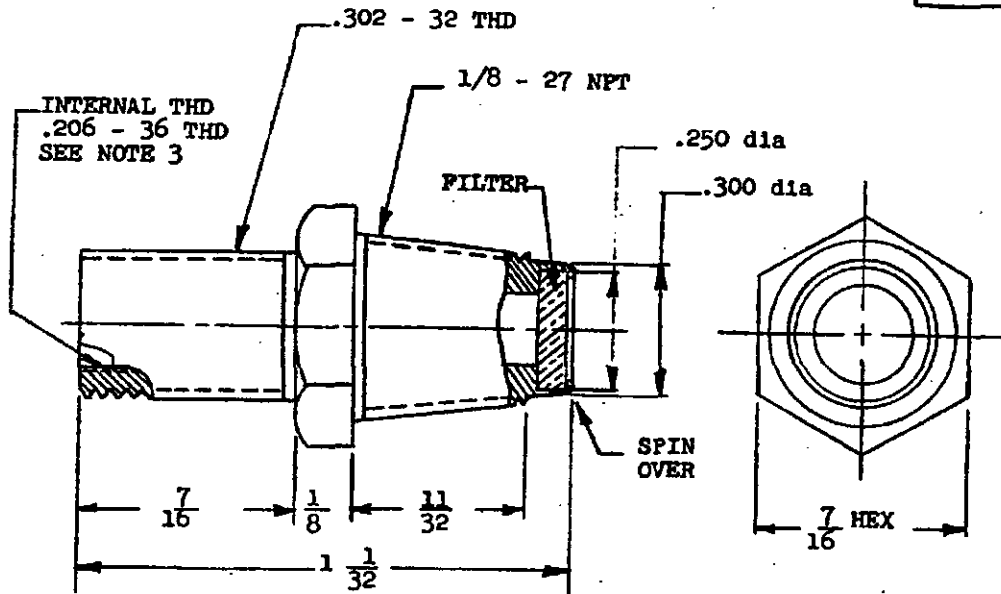


FED. SUP CLASS  
1240

MATERIAL: VALVE STEM: CORROSION RESISTING STEEL, 300 SERIES AISI  
FEDERAL STANDARD NO. 66. PASSIVATED SPECIFICATION QQ-P-35  
FILTER: BRONZE MESH, .240 DIA 1/16" THICK HAVING A STOPPAGE  
SIZE FROM 40 TO 50 MICRONS

DIMENSIONS: ALL DIMENSIONS ARE IN INCHES

TOLERANCE: FRACTIONS  $\pm 1/64$  DECIMALS  $\pm .005$ .  
MS PART NUMBER CONSISTS OF THE MS NUMBER PLUS THE DASH  
NUMBER.

- NOTES:
1. FOR DESIGN FEATURE PURPOSES, THIS STANDARD TAKES PRECEDENCE OVER PROCUREMENT DOCUMENT REFERENCED HEREIN
  2. REFERENCE DOCUMENTS SHALL BE OF THE ISSUE IN EFFECT ON DATE OF INVITATIONS FOR BID
  3. VALVE STEM TO ACCOMMODATE SHORT VALVE CORE, MS51377-2

MS PART NO.

MS 51607-1

P.A. MU (FA)	TITLE	MILITARY STANDARD
Other Cust	VALVE STEM, PURGING (WITH FILTER)	MS 51607 (MU)
Procurement Specification NONE	SUPERSEDES: HUCOM DWG. B8	SHEET 1 OF 1

(Limited coordination) PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE.

APPROVED 15 April 1966 REVISED A 29 Sept. 1967

This has been approved by the Munitions Command Department of the Army and is mandatory for use by that activity. All other military activities are required to employ this standard where suitable.

REVIEW AC: TIES: ARMY - MU, AT