

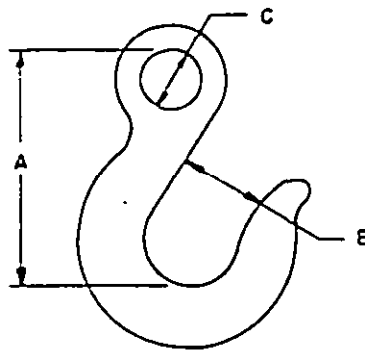
FED. SUP CLASS
4030

TABLE I

DASH NUMBER	CHAIN SIZE	A REF	B		C MIN	PROOF LOAD (POUNDS)	APPROXIMATE WEIGHT (POUNDS)
			MAX	MIN			
1	1/4	3.62	1.50	.36	.75	2,250	0.4
2	3/8	4.30	1.91	.91	.94	4,650	1.5
3	1/2	5.50	2.15	1.00	1.31	9,250	4.5
4	5/8	6.75	2.44	1.12	1.50	12,500	7.3
5	3/4	7.50	2.72	1.25	1.69	17,700	15.0
6	7/8	9.06	3.09	1.37	2.00	24,000	27.0
7	1	10.50	3.56	1.50	2.44	31,000	35.0

NOTES:

1. MATERIAL: Forged carbon steel, in accordance with procurement specification.
2. PROTECTIVE COATING: Zinc coating (hot dip galvanized) in accordance with ASTM A153, with supplementary chromate treatment in accordance with MIL-C-17711.
3. DIMENSIONS: All dimensions are in inches unless otherwise specified.
4. PART NUMBER: The MS part number consists of the MS number, plus the dash number.
Example: MS51826-1.
5. For design feature purpose, this standard takes precedence over procurement documents referenced herein.
6. Reference documents shall be of the issue in effect on date of invitations for bid.
7. The illustration is for identification purpose only and is not intended to restrict designs or shapes not dimensioned.

© CANCELLED AFTER 4 MAY 1988.
NO SUPERSEDING STANDARD.

P.A. VC	TITLE	MILITARY STANDARD
Other Cust	HOOK, HOIST OR SLING, DIRECT EYE	MS 51826
PROCUREMENT SPECIFICATION RR-C-271	SUPERSEDES Ⓟ	SHEET OF

DD FORM 672-1 (Coordinated)

DISTRIBUTION STATEMENT A. Approved for public release; distribution is unlimited.

AMSC N7A

APPROVED 26 MAY 1966 REVISED 21 MAR 1973 © 25 JAN 1974 © 4 MAY 1988

This military standard is mandatory for use by all Departments and Agencies of the Department of Defense. Selection for all new engineering and design applications and for repetitive use shall be made from this document.

REVIEWER: E.L. GLAIS, ME, 82
USER: AT, AV, MC, OS, YO, SH