


FED. SUP. CLASS
4730

(D) User Activities:
 Army - AT, AV, EL, AR
 Navy - DS, MC
 (E) Device Activities:
 Army - GI, ME
 Air Force - BS
 DLA - CS

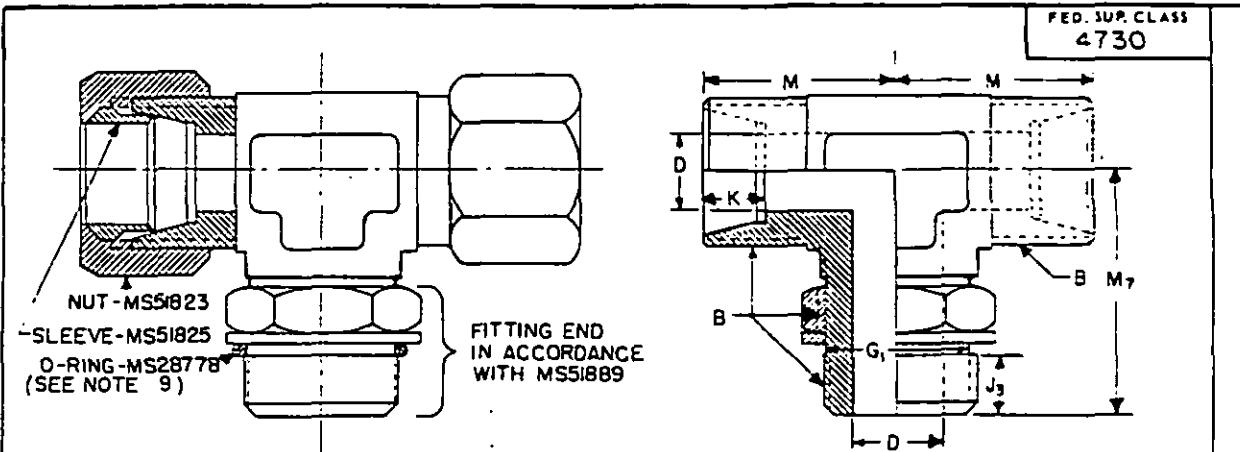

DASH NUMBER	TUBE O.D. ASSY	NOM	B	D	G ₁	J ₃	K	M	M ₇
			STRAIGHT THREAD CLASS 2A	DRILL	DIA -.002 -.003	FULL THREAD ±.005	-.015 -.005	±.03	±.03
1	21	1/8	5/16-24UNF	.093	.250	.234	.188	.77	.91
2	22	3/16	3/8-24UNF	.125	.313	.234	.234	.83	.94
3	23	1/4	5/16-20UNF	.203	.364	.251	.234	.89	.93
4	24	5/16	1/2-20UNF	.234	.427	.291	.250	.95	.99
5	25	3/8	9/16-16UNF	.281	.482	.312	.250	1.05	1.25
6	26	1/2	3/4-16UNF	.422	.660	.344	.305	1.25	1.35
7	27	5/8	7/8-14UNF	.500	.773	.391	.350	1.42	1.70
8	28	3/4	1-1/16-12UN	.656	.945	.469	.350	1.56	1.94
9	29	7/8	1-3/16-12UN	.718	1.070	.469	.350	1.62	2.00
10	30	1	1-5/16-12UN	.875	1.195	.469	.415	1.73	2.05
11	31	1-1/4	1-5/8-12UN	1.093	1.507	.469	.415	1.89	2.25
12	32	1-1/2	1-7/8-12UN	1.344	1.756	.469	.485	2.02	2.39
13	33	2	2-1/2-12UN	1.813	2.381	.469	.485	2.45	2.89

NOTES:

1. MATERIAL: Steel, carbon in accordance with procurement specification.
Steel, corrosion-resisting in accordance with procurement specification.
2. PROTECTIVE COATING: Cadmium plated in accordance with procurement specification.
Zinc plated in accordance with procurement specification.
Phosphate coating in accordance with procurement specification.
Passivation treatment in accordance with procurement specification.
3. DIMENSIONS AND TOLERANCES: Dimensions and tolerances not shown shall be in accordance with SAE Standard for Flareless Tube Fittings (SAE J514).
- (D) 4. THREADS: Threads shall be in accordance with Screw-Thread Standards for Federal Services, FED-STD-H28.
- (D) 5. PART NUMBER: The MS part number consists of the MS number, plus the dash number and (for complete assembly) the applicable MS51825 sleeve style designator.
 - A. For complete assembly (with nuts and sleeves), cadmium plated, use the MS number, plus the assembly dash number and the sleeve style designator.
Example: MS51841-1A or MS51841-1B.
 - B. For body only, cadmium plated, use the MS number and the body dash number.
Example: MS51841-21.
 - C. For zinc coating add "Z" and (for complete assembly) the sleeve style designator to the dash number. Example: MS51841-1ZA or MS51841-12B or MS51841-21Z.
 - D. For phosphate coating add "P", and (for complete assembly) the sleeve style designator to the dash number. Example: MS51841-1PA or MS51841-1PB or MS51841-21P.
 - E. For corrosion-resistant steel add "SS" and (for complete assembly) the sleeve style designator to the dash number. Example: MS51841-1SSA or MS51841-1SSB or MS51841-21SS.
- b. For design feature purposes, this standard takes precedence over procurement documents referenced herein.
- c. Reference documents shall be of the issue in effect on date of invitations for bid.
- d. The illustration is for identification and is not intended to restrict designs or shapes not dimensioned.
- e. Procure the O-Ring separately and install immediately before installation of the fitting.
After 9 July 1973, bodies will be used for production only and SHALL NOT be stocked for maintenance. Existing stock of bodies should be used until depleted.

(D) Denotes change

P.A. AR Cber Cuer 99	TITLE TEE, TUBE TO BOSS, BOSS ON BRANCH, O-RING, FLARELESS TYPE, HYDRAULIC.	MILITARY STANDARD MS51841
PROCUREMENT SPECIFICATION MIL-F-18866	SUPERSEDES:	SHEET 1 OF 1

DISTRIBUTION STATEMENT A. Approved for public release; distribution is unlimited.
This military standard is approved for use by all Departments and Agencies
of the Department of Defense. Selection for all new engineering and design
applications and for repetitive uses shall be made from this document, when applicable.