


FED. SUP CLASS
5365

(B)

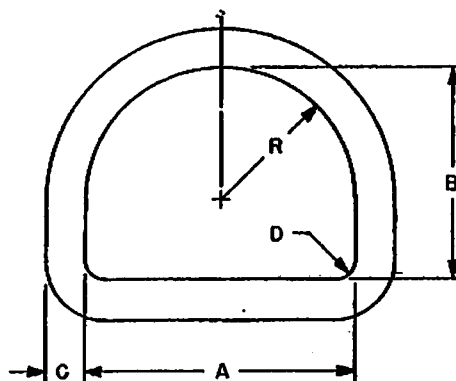

DASH NUMBER			STRAP SIZE	A ±.02	B ±.03	C DIA ±.005 ±.003	D ±.02 (B)	R ±.03
STEEL OR IRON	PLASTIC (NYLON)	*BRONZE						
1	15	7	5/8	.62	.50	.148	.06	.31
2	16	8	3/4	.75	.62	.148	.06	.35
3	17	9	7/8	.84	.75	.162	.09	.44
4	18	10	1	1.00	.85	.192	.09	.50
5	19	11	1-1/4	1.25	1.00	.192	.12	.62
6	20	12	1-1/2	1.50	1.25	.243	.12	.75
	21		1-3/4	1.75	1.50	.243	.12	.88

NOTES:

- MATERIAL:** Steel wire (1006 thru 1020) or malleable iron (Grade I) in accordance with procurement specification.
(B) Holding plastic (Nylon) in accordance with MIL-M-20693, Comp A, Type II; color shall be semi-dull black, gloss shall not exceed that of semi-gloss color chip 27038 of FED-STD-595 by visual comparison.
- PROTECTIVE FINISH:** Steel and iron-zinc coating followed by baked enamel in accordance with procurement specification.
- DIMENSIONS:** All dimensions are in inches.
- PART NUMBER:** The MS part number consists of the MS number, plus the dash number.
Example: MS51925-J.
- Referenced documents shall be of the issue in effect on date of invitations for bid.
- For design feature purposes, this standard takes precedence over procurement documents referenced herein.
- * Dash numbers 7 thru 12 are CANCELLED with no supersession after 22 November 1967.
- * Tolerance on "C" diameter of malleable iron rings shall be ±.015.

(B)

This military standard is approved by the Weapons Command, Department of the Army and is mandatory for use by that activity. All other military activities are required to employ this standard where suitable.

P.A. WC Other Cust	TITLE RING, DEE - MEDIUM	MILITARY STANDARD MS51925(WC)
PROCUREMENT SPECIFICATION MIL-R-3300	SUPERSEDES: SPEX1	SHEET 1 OF 1