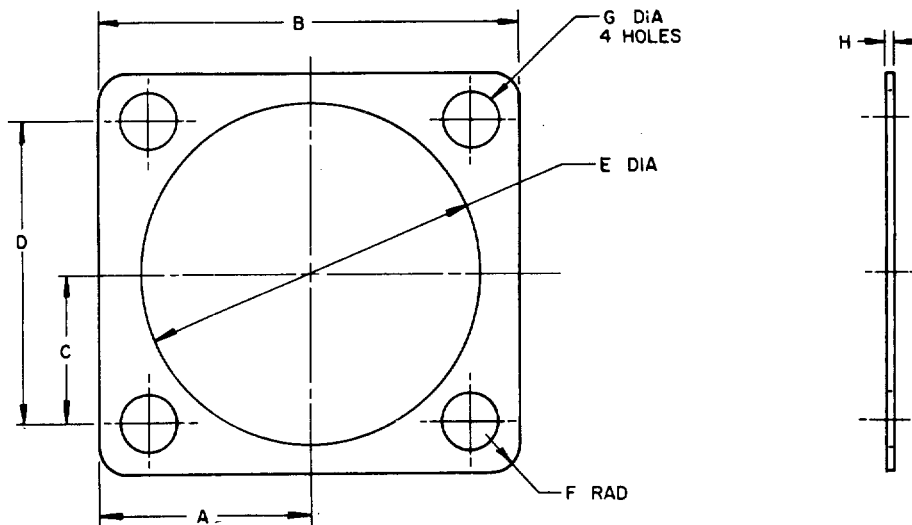


FED. SUP CLASS  
5330

MS DASH NUMBER	SHELL SIZE (MS 3100 & 3102)	FORMER ORD. PART NO.	DIM A	DIM B +.016 -.000	DIM C	DIM D	DIA E +.016 -.000	RAD F	DIA G	DIM H ±.010
-1	8S		.437	.875	.297	.594	.500	.141	.172	.031
-2	10S & 10SL		.500	1.000	.359	.719	.625	.141	.172	.031
-3	12 & 12S	7358501	.547	1.094	.406	.813	.750	.141	.172	.031
-4	14 & 14S	7358502	.594	1.188	.453	.906	.875	.141	.172	.031
-5	16 & 16S	7358503	.641	1.281	.484	.969	1.000	.156	.172	.031
-6	18	7358504	.688	1.375	.531	1.063	1.125	.156	.203	.031
-7	20		.750	1.500	.578	1.156	1.250	.172	.203	.031
-8	22	7388352	.813	1.625	.625	1.250	1.375	.188	.203	.031
-9	24		.875	1.750	.687	1.375	1.500	.188	.203	.031
-10	28	7388357	1.000	2.000	.781	1.563	1.750	.219	.203	.031
-11	28		1.344	2.688	1.094	2.188	1.750	.250	.203	.031
-12	32	7358505	1.125	2.250	.875	1.750	2.000	.250	.219	.031
-13	36		1.250	2.500	.969	1.938	2.188	.281	.219	.031
-14	40		1.375	2.750	1.094	2.188	2.437	.281	.219	.031

## NOTE:

- (A) 1. MATERIAL SHALL BE RUBBER PER MIL-R-3065; GRADE SC815 C<sub>1</sub>E<sub>3</sub> PER ASTM D 2000.
2. MS PART NUMBER SHALL CONSIST OF THE MS NUMBER, PLUS THE MS DASH NUMBER.
3. UNLESS OTHERWISE SPECIFIED, DIMENSIONS ARE IN INCHES. TOLERANCES ARE ±.010 ON DECIMALS.
4. FOR DESIGN FEATURE PURPOSES, THIS STANDARD TAKES PRECEDENCE OVER PROCUREMENT DOCUMENTS REFERENCED HEREIN.
5. REFERENCED DOCUMENTS SHALL BE OF THE ISSUE IN EFFECT ON DATE OF INVITATION FOR BID.

(A) DENOTES CHANGES

P.A. ARMY-AT Other Cust	TITLE  <b>GASKET, RUBBER, SYNTHETIC</b>	<b>MILITARY STANDARD</b>
PROCUREMENT SPECIFICATION NONE	SUPERSEDES:	<b>MS52000</b> (AT)
		SHEET 1 OF 1

DD FORM 672-1 (Limited coordination)

PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE.

5330-A091

REVIEW ACTIVITIES: ARMY-MI; DLA-15

This military standard is approved for use by the US Army Tank-Automotive Command, Department of the Army, and is available for use by all Departments and Agencies of the Department of Defense.

APPROVED 20 OCT 1964 REVISED (A) 14 DEC 82