

USER ACTIVITIES:

REVIEWER ACTIVITIES:
AIR FORCE - 84
DLA-IS

This military standard is approved for use by all Departments and Agencies of the Department of Defense. Selection for all new engineering and design applications and for repetitive use shall be made from this document when applicable.

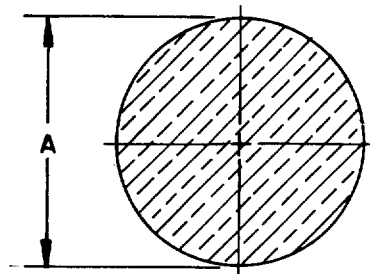


TABLE I. DASH NUMBERS.

DASH NO	A	TEMPER
001	.312	SOFT

REQUIREMENTS:

1. MATERIAL. COPPER BASE ALLOY 268 (UNS C268000), AS SPECIFIED IN PROCUREMENT DOCUMENT.
2. LENGTH. STANDARD LENGTH OF ROUND WIRE IS 10 FEET MINIMUM, 12 FEET MAXIMUM.
3. FORMING PROCESS. COLD WORKED - CODE "C".
4. PART NUMBER. THE PART NUMBER CONSISTS OF THE BASIC MS NUMBER, PLUS A FORMING PROCESS CODE, PLUS A DASH NUMBER FROM TABLE I.

EXAMPLE: MS52004C001

DASH NUMBER FROM TABLE I

COLD WORKED (SEE REQUIREMENT 3)

BASIC MS NUMBER

NOTES:

1. ALL DIMENSIONS ARE IN INCHES.
2. REFERENCED DOCUMENTS SHALL BE OF THE ISSUE IN EFFECT ON DATE OF INVITATIONS FOR BIDS, OR REQUEST FOR PROPOSAL, EXCEPT THE REFERENCED ADOPTED INDUSTRY DOCUMENTS SHALL GIVE THE DATE OF THE ISSUE ADOPTED.
3. FOR DESIGN FEATURE PURPOSES THIS STANDARD TAKES PRECEDENCE OVER PROCUREMENT DOCUMENTS REFERENCED HEREIN.

APPROVED 25 OCT 84
REVISED

P.A. Other Cust	MR SH 99	INTERNATIONAL INTEREST	TITLE WIRE, NONELECTRICAL, ROUND, COPPER BASE ALLOY 268	MILITARY STANDARD
PROCUREMENT SPECIFICATION QQ-B-626			SUPERSEDES:	MS52004
			PAGE	OF