

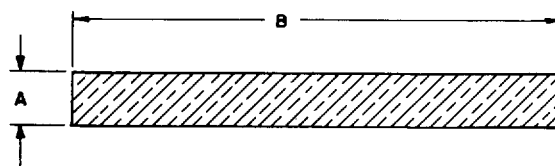
FED. SUP CLASS
9535

TABLE I. DASH NUMBERS.

DASH NO	A	B	TEMPER
001	.002	6	ANNEALED

REQUIREMENTS:

1. MATERIAL. COPPER BASE ALLOY 230 (UNS C23000), AS SPECIFIED IN PROCUREMENT DOCUMENT.
2. LENGTH. STANDARD LENGTH OF STRIP IS 10 FEET MINIMUM, 12 FEET MAXIMUM.
3. FORMING PROCESS. ROLLED - CODE "R".
4. PART NUMBER. THE PART NUMBER CONSISTS OF THE BASIC MS NUMBER, PLUS A FORMING PROCESS CODE, PLUS A DASH NUMBER FROM TABLE I.

EXAMPLE: MS52023R001

DASH NUMBER FROM TABLE I

ROLLED (SEE REQUIREMENT 3)

BASIC MS NUMBER

5. MARKING. COPPER AND COPPER BASE ALLOYS SHALL BE MARKED IN ACCORDANCE WITH FED-STD-185 WITH THE EXCEPTION THAT A PART NUMBER FROM THIS MILITARY STANDARD SHALL BE INCLUDED AS PART OF THE IDENTIFICATION MARKING.

NOTES:

1. ALL DIMENSIONS ARE IN INCHES.
2. REFERENCED DOCUMENTS SHALL BE OF THE ISSUE IN EFFECT ON DATE OF INVITATIONS FOR BIDS, OR REQUEST FOR PROPOSAL, EXCEPT THE REFERENCED ADOPTED INDUSTRY DOCUMENTS SHALL GIVE THE DATE OF THE ISSUE ADOPTED.
3. FOR DESIGN FEATURE PURPOSES THIS STANDARD TAKES PRECEDENCE OVER PROCUREMENT DOCUMENTS REFERENCED HEREIN.

USER ACTIVITIES:

REVIEWER ACTIVITIES:
AIR FORCE - 84
DLA - IS

This military standard is approved for use by all Departments and Agencies of the Department of Defense. Selection for all new engineering and design applications and for repetitive use shall be made from this document when applicable.

P.A. Other Cust	MR SH 99	INTERNATIONAL INTEREST	TITLE STRIP, METAL, COPPER BASE ALLOY 230	MILITARY STANDARD MS52023
PROCUREMENT SPECIFICATION QQ-B-613			SUPERSEDES:	PAGE OF

DD FORM 1 MAY 73 672-1 (COORDINATED)

PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE

9535-0368

APPROVED 25 OCT 84
REVISED