

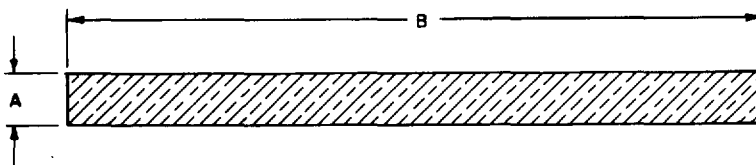
FED. SUP CLASS
9535

TABLE I. DASH NUMBERS.


DASH NO	A	B	TEMPER
001	.001	6.0	1/2 H
003	.002	6.0	1/2 H
005	.003	6.0	1/2 H
007	.003	6.0	SPRING
009	.004	6.0	1/2 H
011	.005	6.0	SPRING
013	.005	6.0	1/2 H
015	.005	12.0	ANNEALED
017	.005	12.0	1/2 H
019	.006	6.0	1/2 H
021	.007	6.0	1/2 H
023	.008	6.0	1/2 H
025	.009	6.0	1/2 H
027	.010	6.0	1/2 H
029	.010	6.0	ANNEALED
031	.010	12.0	1/2 H
033	.012	6.0	ANNEALED
035	.012	8.0	SPRING

DASH NO	A	B	TEMPER
037	.016	6.0	1/4 H
039	.016	12.0	1/2 H
041	.020	6.0	1/4 H
043	.020	6.0	H
045	.020	8.0	SPRING
047	.025	6.0	1/2 H
049	.025	6.0	ANNEALED
051	.032	6.0	1/4 H
053	.063	1.5	H
055	.063	2.0	H
057	.064	12.0	1/2 H
059	.064	18.0	1/2 H
061	.125	12.0	H
063	.129	18.0	1/2 H

REQUIREMENTS:

- MATERIAL.** COPPER BASE ALLOY 260 (UNS C26000), AS SPECIFIED IN PROCUREMENT DOCUMENT.
- LENGTH.** STANDARD LENGTH OF STRIP IS 10 FEET MINIMUM, 12 FEET MAXIMUM.
- FORMING PROCESS.** ROLLED - CODE "R".
- PART NUMBER.** THE PART NUMBER CONSISTS OF THE BASIC MS NUMBER, PLUS A FORMING PROCESS CODE, PLUS A DASH NUMBER FROM TABLE I.

EXAMPLE: MS52024R001



- MARKING.** COPPER AND COPPER BASE ALLOYS SHALL BE MARKED IN ACCORDANCE WITH FED-STD-185 WITH THE EXCEPTION THAT A PART NUMBER FROM THIS MILITARY STANDARD SHALL BE INCLUDED AS PART OF THE IDENTIFICATION MARKING.

NOTES:

- ALL DIMENSIONS ARE IN INCHES.
- REFERENCED DOCUMENTS SHALL BE OF THE ISSUE IN EFFECT ON DATE OF INVITATIONS FOR BIDS, OR REQUEST FOR PROPOSAL, EXCEPT THE REFERENCED ADOPTED INDUSTRY DOCUMENTS SHALL GIVE THE DATE OF THE ISSUE ADOPTED.
- FOR DESIGN FEATURE PURPOSES THIS STANDARD TAKES PRECEDENCE OVER PROCUREMENT DOCUMENTS REFERENCED HEREIN.

P.A.	MR	INTERNATIONAL INTEREST	TITLE	MILITARY STANDARD
Other Cust	SH		STRIP, METAL, COPPER BASE ALLOY 260	MS52024
	99			
PROCUREMENT SPECIFICATION			SUPERSEDES:	PAGE 1 OF 1
QQ-B-613, QQ-B-626				

DD FORM 1 MAY 73 672-1 (COORDINATED)

PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE

9535-0369

USER ACTIVITIES:

REVIEWER ACTIVITIES:
AIR FORCE-84
DLA-IS

This military standard is approved for use by all Departments and Agencies of the Department of Defense. Selection for all new engineering and design applications and for repetitive use shall be made from this document when applicable.

REVISED
APPROVED 25 OCT 84