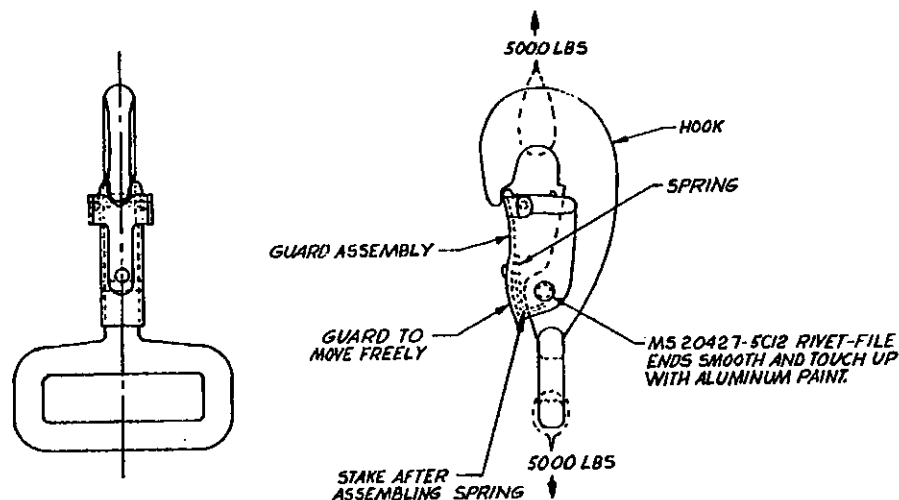


FED. SUP CLASS  
1670

## SNAP ASSEMBLY

## REQUIREMENTS:

## MATERIALS:

- HOOK - STEEL, MIL-S-6758; OPTIONAL MIL-S-6050.
- PIN - STEEL WIRE, QQ-W-461 COMP 1045; FINISH 1 TEMPER-HARD.
- CLIP - STEEL, QQ-S-698, CQ
- GUARD - STEEL, QQ-S-698, CQ
- SPRING - BERYLLIUM COPPER, QQ-C-533
- HOLDER - STEEL, SPRING, QQ-S-777
- RIVET - STEEL, MS16535-2

## FINISH:

HOOK, GUARD, CLIP, PIN AND HOLDER: CADMIUM PLATE IN ACCORDANCE WITH QQ-P-416, CLASS 1, TYPE I.

## HEAT TREATMENT:

- HOOK - HEAT TREAT TO 160,000-180,000 LBS/SQ. IN. TS, MIL-H-6875.
- SPRING - AFTER FORMING, HEAT TO 1/2 H CONDITION IN ACCORDANCE WITH QQ-C-533.
- HOLDER - HEAT TREAT TO SPRING TEMPER MIL-S-6875.

## TOLERANCES:

UNLESS OTHERWISE SPECIFIED, TOLERANCES ARE: DECIMALS  $\pm .005$ ; FRACTIONS  $\pm 1/64$ .

SURFACE ROUGHNESS:- 125 MAX IN ACCORDANCE WITH USA STANDARDS INSTITUTE - USAS 46.1.

PROOF LOAD:- SNAP ASSEMBLY SHALL BE SUBJECTED TO THE PROOF LOAD SPECIFIED AND AS INDICATED BY ARROWS IN ACCORDANCE WITH MIL-H-7195.

## NOTES:

1. REMOVE ALL BURRS AND BREAK ALL SHARP EDGES.
2. FOR DESIGN FEATURE PURPOSES, THIS STANDARD TAKES PRECEDENCE OVER PROCUREMENT DOCUMENTS REFERENCED HEREIN.
3. REFERENCED DOCUMENTS SHALL BE OF THE ISSUE IN EFFECT ON DATE OF INVITATION FOR BIDS.

This military standard is mandatory for use by all Departments and Agencies of the Department of Defense. Selection for all new engineering and design applications and for repetitive use shall be made from this document.


REVIEW USER  
ARMY-GL  
NAVY-AS  
USAF-II, MC

P.A. ARMY-GL Other Cust NAVY-AS USAF-II	TITLE SNAP ASSEMBLY-PARACHUTE CONNECTOR, LOCKING TYPE	MILITARY STANDARD MS 70117
PROCUREMENT SPECIFICATION MIL-H-7195	SUPERSEDES USAF 43B26561	SHEET 1 OF 4






DD FORM 672-1 (Coordinated)

P1 TYPING ERRORS OF THIS FORM ARE OBSOLETE.

APPROVED 3 OCT 1969 REVISED

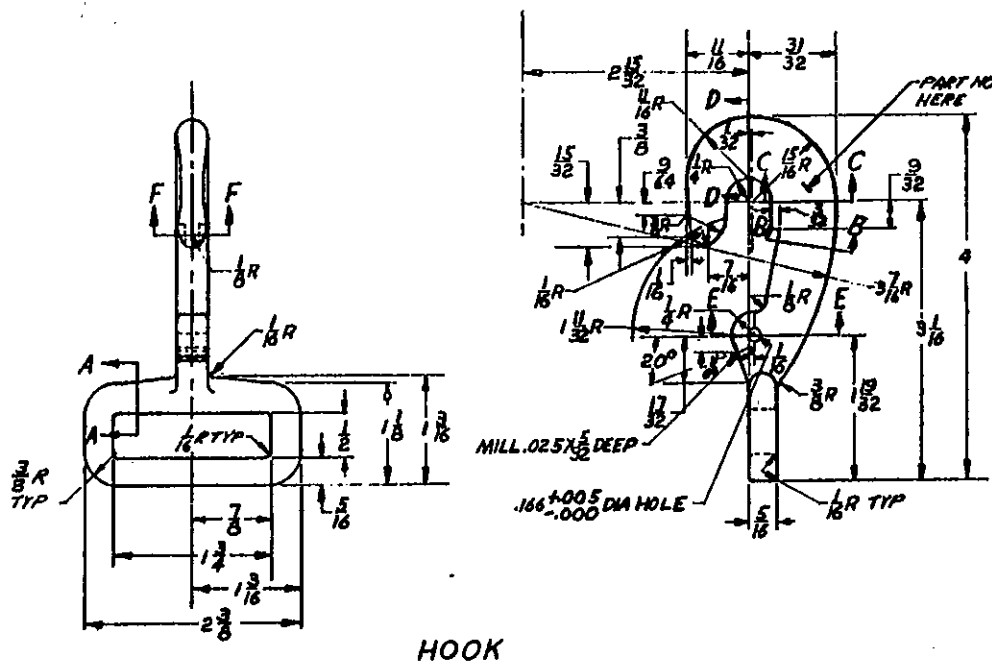FED. SUP CLASS  
1670

SECTION A-A



This military standard is mandatory for use by all Departments and Agencies of the Department of Defense. Selection for all manufacturing and design applications and for repetitive use shall be made from this document.

P.A. ARMY-6L Other Code NAVY-AS USAF-11	TITLE <b>SNAP ASSEMBLY-PARACHUTE CONNECTOR, LOCKING TYPE</b>	MILITARY STANDARD <b>MS 70117</b>
PROCUREMENT SPECIFICATION	SUPERSEDES <b>USAF 43B26561</b>	SHEET <b>2</b> OF <b>4</b>

DD FORM 672-1 (Coordinated)


PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE.

APPROVED 3 OCT 1969 REVISED


FED. SUP CLASS  
1670

NOTE:  
TOUCH UP RIVET HEAD  
WITH ALUMINUM PAINT


## GUARD ASSEMBLY



PIN

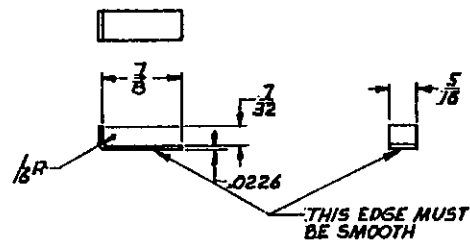

SPRING

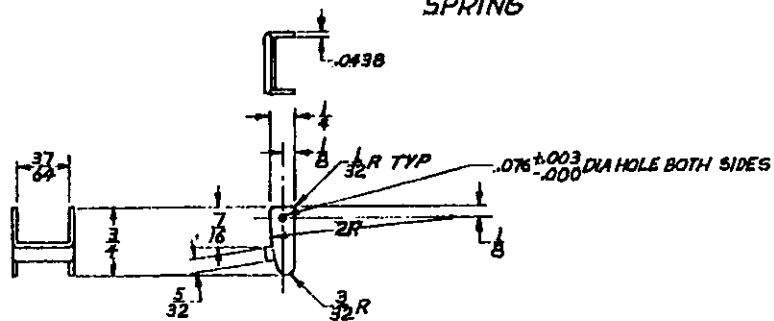

CLIP

This military standard is mandatory for use by all Departments and Agencies of the Department of Defense. Selection for all new engineering and design applications and for repetitive use shall be made from this document.

APPROVED 30 OCT 1969 REVISED

P.A. ARMY-GL	TITLE	MILITARY STANDARD
Other Code	SNAP ASSEMBLY-PARACHUTE CONNECTOR, LOCKING TYPE	MS 70117
NAVY-A5		
USAF-II		
PROCUREMENT SPECIFICATION	SUPERSEDES:	SHEET 3 OF 4
	USAF 43B26561	

DD FORM 672-1 (Continued)

PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE.

