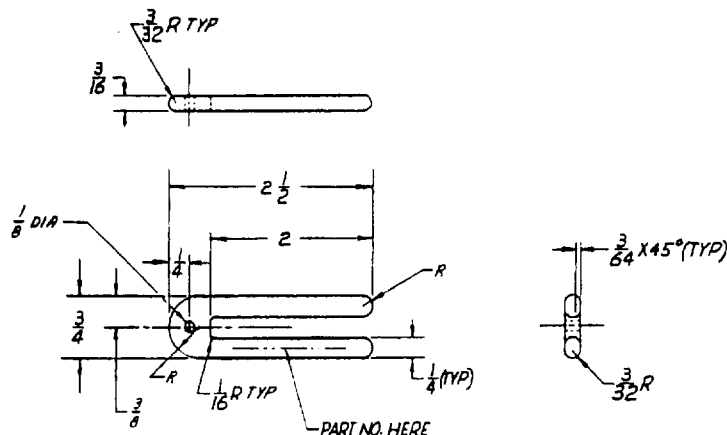


FED. SUP CLASS
1670

REQUIREMENTS:

MATERIAL: ALUMINUM ALLOY, TEMPER T4, QQ-A-225/E.

SURFACE ROUGHNESS: 63/ MAX., INTERPRET IN ACCORDANCE WITH AMERICAN NATIONAL STANDARDS INSTITUTE, INC., ANSI B46.1.

FINISH: ANODIZE, TYPE II, CLASS I, MIL-A-8625.

BREAK SHARP EDGES AND REMOVE ALL BURRS.

DIMENSIONS IN INCHES. FRACTIONAL TOLERANCE $\pm 1/64$, ANGLES $\pm 2^\circ$.

NOTES:

1. FOR DESIGN FEATURE PURPOSES, THIS STANDARD TAKES PRECEDENCE OVER PROCUREMENT DOCUMENTS REFERENCED HEREIN.
2. REFERENCED DOCUMENTS SHALL BE OF THE ISSUE IN EFFECT ON DATE OF INVITATION FOR BIDS.

This Military Standard is mandatory for use by all Departments, Agencies, and Activities. Selection for all new engineering and design applications and for repetitive use shall be made from this document.

USAF - 11, 82
NAVY - AS
ARMY - AV
MC

P.A. 6L
Other Cust
NAVY AS
USAF 11
PROCUREMENT SPECIFICATION:
MIL-H-7195

TITLE
FORK, LOCKING, PARACHUTE SLIP RISER
SUPERSEDES
USAF 5786221

MILITARY STANDARD
MS 70122
SHEET 1 OF 1

DD FORM 672-1

PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE

APPROVED 27 AUG 1970 REVISED