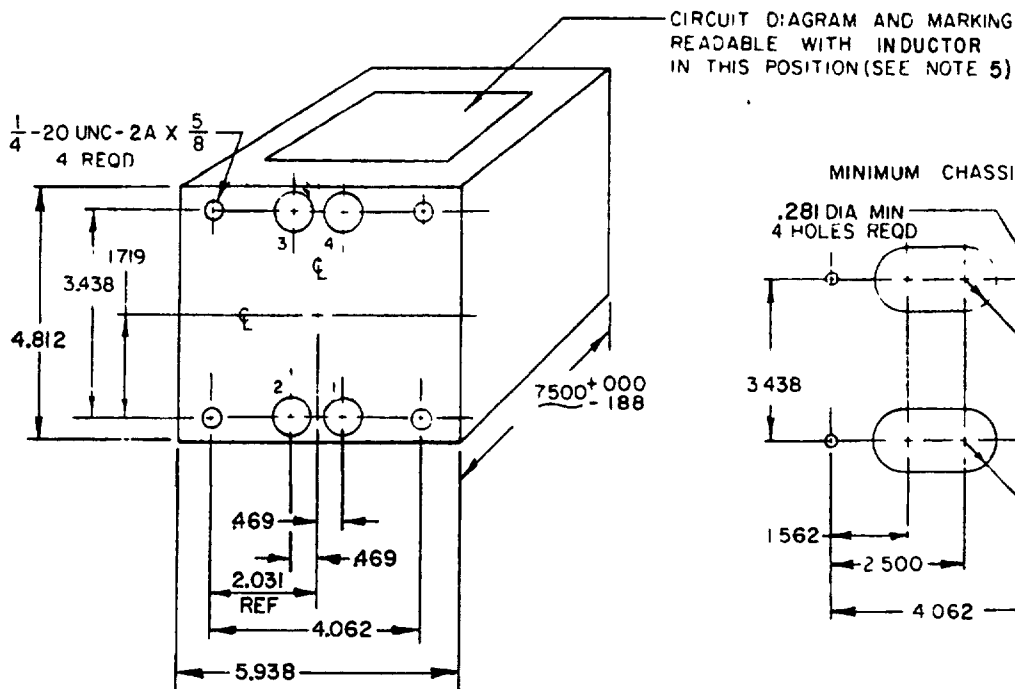


Reviewer/user information is current as of the date of this document. For future coordination of changes to this document, draft circulation should be based on the information in the current DODISS (FSC listing) AF H 11, 85, 17 @ 19, 14 Army H EL, MU Navy H WR, SH @ MC

This military standard is approved by the Department of Defense and is mandatory on all activities. Selection for all new engineering and design applications and for repetitive use shall be made from this document.

CASE, MOUNTING, TERMINAL ARRANGEMENT AND MARKING


FED SUP CLASS
5950

INCHES	MM	INCHES	MM
.188	4.78	2.500	63.50
.281	7.14	3.438	87.33
.438	11.13	4.062	103.17
.469	11.91	4.812	122.22
1.562	39.67	5.938	150.83
1.719	43.66	7.500	190.50
2.031	51.59	5/8	15.88

CIRCUIT DIAGRAM AND MARKING
WORKING VOLTAGE 3,500 V MAX

SERIES 25 H
1,000 V RMS
.315 AMP DC
150 OHMS

PARALLEL 6 25 H
500 V RMS
.630 AMP DC
37 OHMS

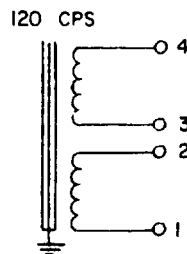

MAX ALTITUDE 10,000 FT

THIS MILITARY STANDARD INACTIVE FOR NEW DESIGN AFTER 28 MAY 1981
NO SUPERSEDING STANDARD

NOTES:

1. All dimensions in inches.
2. Unless otherwise specified, tolerance on overall case dimensions is $\pm .000$ (.00 mm), $-.125$ (3.18 mm).
3. Tolerance on mounting dimensions is $\pm .047$ (1.19 mm). Mounting studs are symmetrically located with respect to the centerlines of the case.
4. Tolerance on terminal positioning dimensions is $\pm .125$ (3.18 mm). Terminals fit within minimum chassis cutout.
5. Type designation, MS part no. and manufacturer's name or code symbol to be marked on side opposite terminals.
6. Referenced document shall be of the issue in effect on date of invitations for bid.
7. For design feature purposes, this standard takes precedence over procurement document referenced herein.
8. Metric equivalents (to the nearest .01 mm) are given for general information only and are based upon 1 inch = 25.4 mm.

① ENTIRE STANDARD REVISED

MS PART NO. MS75003-2

PA Army-ER Other Cust Navy-EC AIR FORCE-85	TITLE INDUCTOR, POWER, TYPE TF4RX04YY013	MILITARY STANDARD
Procurement Specification MIL-T-27	SUPERSEDES	MS 75003
		PAGE 1 OF 2

DD FORM 672
25 OCT 63

(Coordinated) PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE

5950-0604-3

APPROVED 9 JUNE 1958 REVISED ① 29 NOV 1960 ② 21 September 1965 ③ 28 MAY 1981 ④ 20 MAY 1982

Reviewer/user information is current as of the date of this document. For future coordination of changes to this document, draft circulation should be based on the information in the current DODISS (FSC listing) Navy AF WP, SH @ MC

This military standard is approved by the Department of Defense and is mandatory in all activities. Selection for all new engineering and design applications and for repetitive use shall be made from this document.

AF H 11, 85, 17 @ 19, 14 Army H EL, MU

FED SUP CLASS
5950

ELECTRICAL RATING

Inductance:	DC resistance
(1-4) 25 h min	(1-2) 70 ohms, $\pm 10\%$
(1-3) and (2-4) 6.25 h min	(3-4) 80 ohms, $\pm 10\%$
Current:	Duty cycle Continuous
(1-4)315 amp dc	Life expectancy 10,000 hr min
(1-3) and (2-4)630 amp dc	Working voltage:
Voltage:	(1-4) 3,500 v max
(1-4) 1,000 v rms	(1-3) and (2-4) 3,500 v max
(1-3) and (2-4) 500 v rms	Altitude 10,000 ft max
Frequency 120 cps, $\pm 10\%$	Operating temperature 105° C max

Note: When numbers in parentheses, eg (1-2), are used, they indicate the winding and the extreme terminals of the winding. When the extreme terminals of both windings are used, eg (1-4), the windings are connected in series, ie, terminals 2 and 3 are connected. When the extreme terminal of one winding and the extreme terminal of another winding are used, eg (1-3) and (2-4), the windings are connected in parallel.

PHYSICAL CHARACTERISTICS

Case size YY
Weight 35 lb max
Terminals Solder lug, No. 18 AWG
Terminal height 1.625 (41.28 mm) $\pm .000$688 (17.48 mm)
Shock Method 1, test condition C (50 G)

TEST	ELECTRICAL PROPERTIES				LIMITS
Dielectric withstanding voltage. At sea level	Windings	(1-4)	(1-3)	(2-4)	...
	Volts rms	5,900	5,900	5,900	
DC resistance and resistive unbalance	(1-2): 70 ohms (3-4): 80 ohms Resistive unbalance not applicable				$\pm 10\%$ $\pm 10\%$
Inductance and inductive unbalance	With 50 v, 120 cps, and .315 amp dc applied to (1-4): 25 h With 50 v, 120 cps, and .630 amp dc applied to (1-3) and (2-4): 6.25 h Inductive unbalance not applicable				Min Min
Polarity	Additive, with terminals 2 and 3 connected				...
Temperature rise	40° C with 1,000 v, 108 cps, and .315 amp dc applied to (1-4) at an ambient temperature of 65° C				Max
QUALITY ASSURANCE PROVISIONS: QUALIFICATION INSPECTION: NOT APPLICABLE FOR THIS SPECIFICATION. QUALITY CONFORMANCE INSPECTION: GROUP A AND B TESTS OF MIL-T-27 SHALL BE APPLICABLE.					

P.A. Army - ER	TITLE	MILITARY STANDARD
Other: Cust Navy - EC Air Force - 85	INDUCTOR, POWER, TYPE TF4RX04YY0I3	MS 75003
Procurement Specification MIL-T-27	SUPERSEDES.	PAGE 2 OF 2

APPROVED 9 JUNE 1958 REVISED (A) 29 NOV 1960 (B) SEE PG 1 FOR CHANGES (C) SEE PG 2 FOR CHANGES 20 MAY 1982