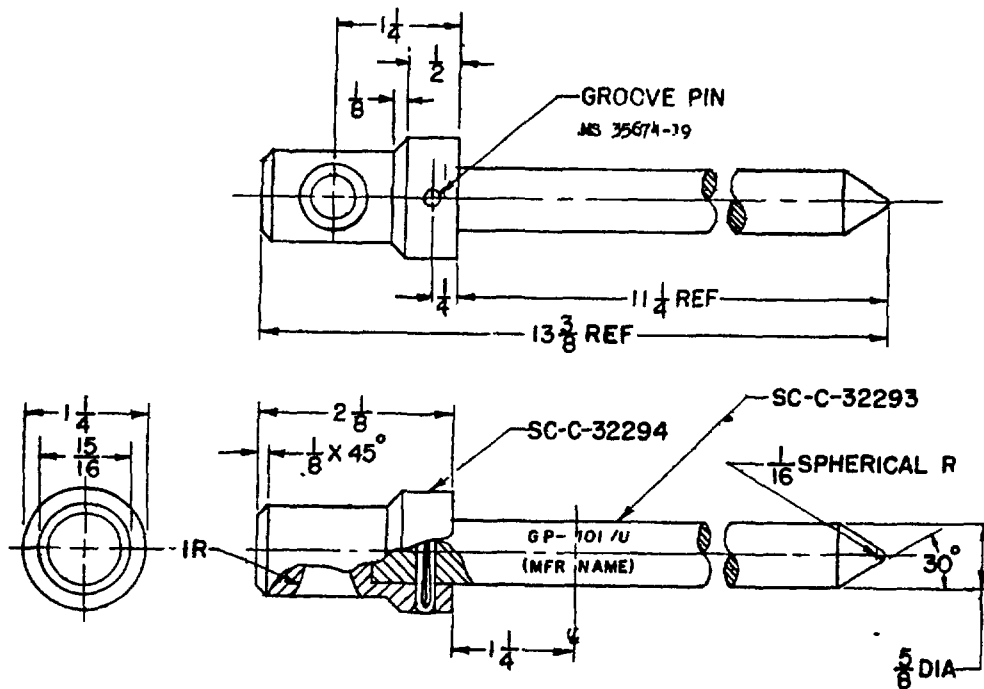


FED SUP CLASS
5975

DASH NO.	REQD	DESCRIPTION	MATERIAL	SIGNAL CORPS DRAWING NO.	FIN
-1	1	STAKE	ALUM ALLOY	SC-C-32293	
	1	CAP	STEEL	SC-C-32294	
	1	GROOVE PIN	STEEL	MS 35674-19	

NOTES:

1. AFTER ASSEMBLY FINISH SEMI-GLOSS GROUND ENAMEL PER SPECIFICATION MIL-T-704 PARA 3.3.4.1
2. MARKING IN ACCORDANCE WITH MIL-STD-130; AFTER FINISH IS APPLIED FILL CHARACTERS WITH A PERMANENT WHITE
3. REFERENCED DOCUMENT SHALL BE OF THE ISSUE IN EFFECT ON DATE OF INVITATION FOR BIDS.
4. THIS STANDARD TAKES PRECEDENCE OVER DOCUMENT REFERENCED HEREIN.
5. THIS DOCUMENT HAS BEEN PROMULGATED BY THE DEPARTMENT OF DEFENSE AS THE MILITARY STANDARD TO LIMIT THE SELECTION OF THE ITEM, PRODUCT, OR DESIGN COVERED HEREIN IN ENGINEERING, DESIGN, AND PROCUREMENT. THIS STANDARD SHALL BECOME EFFECTIVE NOT LATER THAN 30 DAYS AFTER THE LATEST DATE OF APPROVAL SHOWN.

ALL DIMENSIONS IN INCHES.

TOLERANCES ON FRACTIONS $\pm 1/64$, ANGLE $0^\circ 30'$ UNLESS OTHERWISE SPECIFIED.

CUSTOMERS S1gC MC USAF	OTHER INT. I-EO N- N-	MILITARY STANDARD STAKE, GUY, ANTENNA (STAKE GP-101/U)	MS 75015
PROCEDURE SPECIFICATION MIL-S-55094		SHEET 1 OF 1	

APPROVED 2 Feb 60 REVISED